

2015

# Ceiling Fans ...see what's new inside!





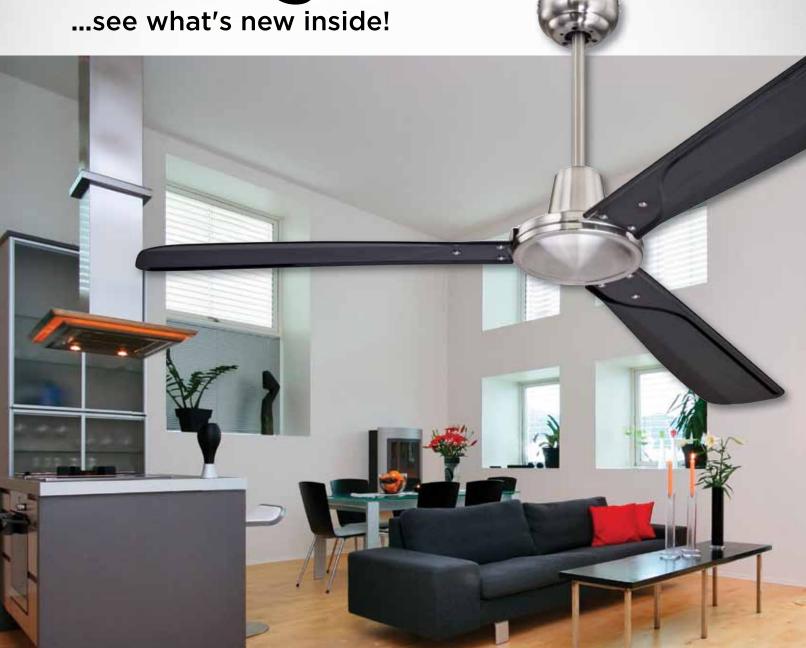

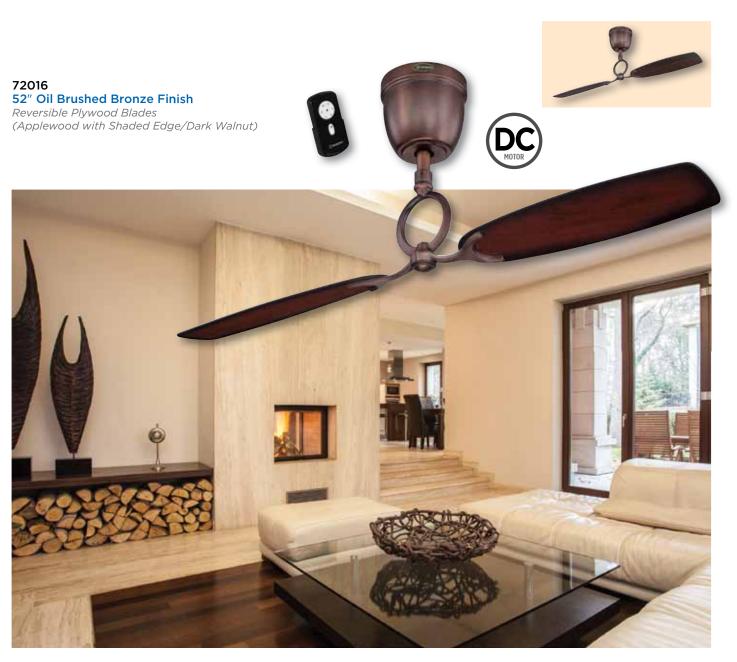





• Includes 6 Speed Remote Control with Reverse Function

# Urban Gale Collection

Sleek, industrial look designed for residential settings.

#### 72021

#### 52" White Finish

White ABS Resin Blades

## **SPECIFICATIONS**

- Limited Lifetime Warranty
- Cold Rolled Steel Motor 171mm x 12mm
- 9° Blade Pitch
- ½" x 12" Down Rod
- 54" Lead Wire
- Includes Remote Control

Airflow: 5174 Cubic Feet Per Minute Electricity Use: 60 Watts (excludes lights)

Airflow Efficiency: 86 Cubic Feet Per Minute Per Watt

CAUTION! Fan must be installed with blades at least 10 feet from the floor.

#### 72020

#### 52" Brushed Nickel Finish

Black ABS Resin Blades

# Troy

#### 72017

### 52" Gun Metal Finish

High Gloss Black Plywood Blades Includes Light Fixture with Opal Frosted Glass

# **SPECIFICATIONS**

- · Limited Lifetime Warranty
- Cold Rolled Steel Motor 153mm x 20mm
- 13° Blade Pitch
- ¾" x 4" Down Rod
- 54" Lead Wire
- Includes Remote Control
- Includes (2) Medium Base, 13 Watt CFL Mini-Twists

Airflow: 5301 Cubic Feet Per Minute Electricity Use: 59 Watts (excludes lights)

Airflow Efficiency: 89 Cubic Feet Per Minute Per Watt

# **Alloy** Collection

Also available in Brushed Nickel (72473) and Gun Metal (78764) finishes.

# 72019

## 42" Oil Rubbed Bronze Finish

Reversible Blades (Walnut/Family Oak)

Includes Light Fixture with Opal Frosted Glass

# **SPECIFICATIONS**

- · Limited Lifetime Warranty
- Cold Rolled Steel Motor 153mm x 10mm
- 15° Blade Pitch
- 3/4" x 4" Down Rod
- 24" Lead Wire
- Includes (2) Candelabra Base, 40 Watt G16 1/2 Lamps

Airflow: 4083 Cubic Feet Per Minute Electricity Use: 51 Watts (excludes lights)

Airflow Efficiency: 80 Cubic Feet Per Minute Per Watt



Compact Fluorescent Lamps contain mercury. (Hg) For more on clean up and safe disposal, visit epa.gov/cfl.



To view the complete line of Westinghouse Lighting products, visit www.westinghouselighting.com.



Airflow Efficiency: 84 Cubic Feet Per Minute Per Watt







# Tulsa Collection

## 72005

# 52" Brushed Nickel Finish

Reversible Plywood Blades (Rich Walnut/Bird's Eye Maple) Includes Light Fixture with White Alabaster Glass

# **SPECIFICATIONS**

- Limited Lifetime Warranty
- Silicon Steel Motor 153mm x 17mm
- 12° Blade Pitch
- ¾" x 6" Down Rod
- 54" Lead Wire
- Includes (2) Medium Base, 13 Watt CFL Mini-Twists


Airflow: 5031 Cubic Feet Per Minute Electricity Use: 56 Watts (excludes lights)

Airflow Efficiency: 89 Cubic Feet Per Minute Per Watt

# 72006

# 52" Oil Brushed Bronze Finish

Reversible Plywood Blades (Dark Cherry/Mahogany) Includes Light Fixture with Amber Alabaster Glass

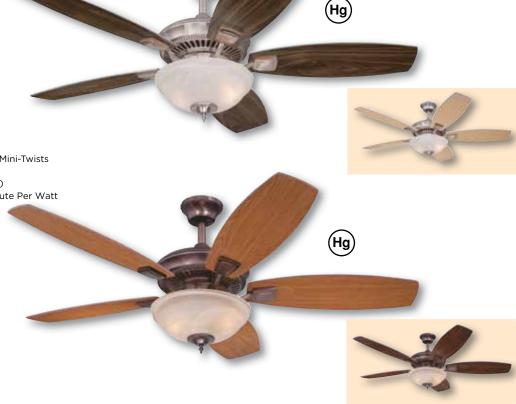

Airflow Efficiency: 78 Cubic Feet Per Minute Per Watt



Compact Fluorescent Lamps contain mercury. (Hg) For more on clean up and safe disposal, visit epa.gov/cfl.

# Hadley Collection

#### 72003

# 42" Brushed Nickel Finish

Reversible Blades (Dark Cherry/Rosewood) Includes Light Fixture with White Alabaster Glass

## **SPECIFICATIONS**

- Limited Lifetime Warranty
- Silicon Steel Motor 153mm x 10mm
- 12° Blade Pitch
- 12" Lead Wire
- Use (2) Candelabra Base, 60 Watt G16 1/2 Lamps (not included)

#### 72004

## 42" Oil Rubbed Bronze Finish

Reversible Blades (Applewood/Cherry) Includes Light Fixture with White Alabaster Glass





Compact Fluorescent Lamps contain mercury. (Hg) For more on clean up and safe disposal, visit epa.gov/cfl.



# Comet Outdoor Collection

Comet Indoor Collection also available in White (7801765), Matte Black (7801665) and Brushed Pewter (7813665) finishes.



#### 72007

#### 52" Espresso Finish

Espresso ABS Resin Blades Includes Light Fixture with Frosted Glass

#### 72008

# 52" White Finish

White ABS Resin Blades Includes Light Fixture with Frosted Glass

## **SPECIFICATIONS**

- Limited Lifetime Warranty
- Cold Rolled Steel Motor 153mm x 18mm
- 10° Blade Pitch
- ¾" x 4" Down Rod
- 54" Lead Wire
- Includes (2) Candelabra Base, 40 Watt Torpedo Lamps

Airflow: 5087 Cubic Feet Per Minute Electricity Use: 56 Watts (excludes lights)

Airflow Efficiency: 90 Cubic Feet Per Minute Per Watt

# NEW Ceiling Fan Accessory

## 77871

# Ceiling Fan and Light Remote Control

- High/ Medium/ Low fan speeds and OFF button.
- Full range light dimmer.
- Operates up to a distance of 40 feet.
- Million code pairings for the frequency code setting.
- Dip switch provides the option of full dimming functionality when used with dimmable lamps. This function can be disabled when using non-dimmable lamps.
- Universal receiver fits most ceiling fans.
- Installs quickly, even in pre-mounted fans.
- Wall Bracket included.
- Includes (2) AAA batteries.

Max. Fan Amp 0.8 Max. Light 300 Watt








CEILING FAN SPECIFICATIONS														
Family Name	Page No.	Size	No. of Blades	Blade Material	Capacitor	Extra Switch Housing Cap	Fan Mounting	Airflow CFM (High)	RPM (High)	Electricity Use-Watts (High)	Efficiency CFM/W (High)	Amp	Remote Control	Slope Angle
Aerialist	2	52"	2	Plywood	N/A	No	Hugger	-	-	-	-	-	Included	N/A
Alloy	3	42"	3	MDF	Dual	No	Down Rod Only	4083	215	51	80	0.42	Adaptable	18°
Anderson	4	52"	5	Plywood	Triple	No	Down Rod Only	4852	189	58	84	0.48	Not Adaptable	20°
Carolina	6	52"	5	MDF	Triple	No	Hugger	-	-	-	-	-	Not Adaptable	N/A
Comet	7	52"	5	ABS Resin	Triple	No	Combo	5087	187	56	90	0.47	Adaptable	18°
Goodwin	4	52"	5	Plywood	Triple	No	Down Rod Only	5015	163	59	84	0.5	Adaptable	21°
Hadley	6	42"	4	MDF	Triple	No	Hugger	-	-	-	-	-	Not Adaptable	N/A
Ripley	5	52"	5	Plywood	Triple	No	Down Rod Only	4837	168	62	78	0.52	Not Adaptable	18°
Troy	3	52"	3	Plywood	Triple	No	Down Rod Only	5301	200	59	89	0.49	Included	18°
Tulsa	5	52"	5	Plywood	Triple	No	Down Rod Only	5031	181	56	89	0.47	Not Adaptable	20°
Urban Gale	3	52"	3	ABS Resin	Dual	No	Down Rod Only	5174	231	60	86	0.54	Included	N/A
Zander	4	52"	5	MDF	Single	No	Down Rod Only	4690	192	56	82	0.49	Included	20°

CUIDE+

Visit www.westinghouselighting.com for FTC energy guide information.



- A Top of Canopy to Bottom of Blade
- B Top of Canopy to Bottom of Switch Housing
- C Top of Canopy to Bottom of Canopy
- D Width of Motor Housing
- E Width of Canopy
- F Top of Canopy to Bottom of Glass

CEILING FAN SPECIFICATIONS - DIMENSIONS											
Family Name	Size of Down Rod Included	А	В	С	D	Е	F				
Aerialist	N/A	18.5"	N/A	N/A	7.77"	N/A	18.5"				
Alloy	3/4" x 4"	6.38"	11"	2.5"	6.75"	5.13"	11.75"				
Anderson	3/4" x 6"	13.13"	15"	2.2"	11.02"	5.98"	19.25"				
Carolina	N/A	6.88"	9.75"	N/A	11.1"	N/A	13.75"				
Comet	3/4" x 4"	11"	12.6"	2.4"	11.3"	5.1"	14.4"				
Goodwin	3/4" x 4"	11.54"	13.39"	2.05"	9.53"	5.83"	17.32"				
Hadley	N/A	5.13"	6.75"	N/A	8.46"	N/A	10.75"				
Ripley	3/4" x 4"	10.75"	13.15"	2.06"	8.26"	5.86"	17.09"				
Troy	3/4" x 4"	12.5"	11.54"	2.06"	8.08"	6.14"	16.54"				
Tulsa	3/4" x 6"	11.63"	14.88"	2.2"	11.5"	5.98"	20.25"				
Urban Gale	1/2" x 12"	18.11"	15.75"	2.44"	18.9"	5.12"	N/A				
Zander	1/2" x 6"	11.88"	14.25"	2.2"	10.26"	5.98"	16.5"				

If a Combo Style Fan with a 4" Down Rod is Installed without the Down Rod, Subtract 3" from the Dimensions Listed (A, B, F). If a Combo Style Fan with a 6" Down Rod is Installed without the Down Rod, Subtract 5" from the Dimensions Listed (A, B, F).

