



# LAMP CATALOG



## WESTINGHOUSE LIGHTING





# CONTENTS

|                            |       |
|----------------------------|-------|
| INTRODUCTION               | 2-4   |
| Celebrating 75 Years ..... | 2-3   |
| Lamp Reference Guide.....  | 4     |
| LED<br>LAMPS               | 5-20  |
| HALOGEN<br>LAMPS           | 21-26 |
| INCANDESCENT<br>LAMPS      | 27-35 |
| INDEX & NOTES              | 36-40 |



All light fixtures, ceiling fans and accessories in this catalog are Underwriter Laboratories, ETL Listed or RU Certified for safety.

Lamps are not included with product unless otherwise noted. We recommend using Westinghouse lamps in all of our ceiling fans and light fixtures. Westinghouse Lighting reserves the right to make changes and/or improvements (both visually and technically) to the products in this catalog without notice. As a result, some products and/or product information may change.

Visit our website for the latest specifications.

# EVOLVING BRIGHTLY 1946-2021



WESTINGHOUSE LIGHTING  
12401 McNULTY ROAD  
PHILADELPHIA, PA 19154-1029

T 215-671-2000

WESTINGHOUSELIGHTING.COM  
WESTINGHOUSE.COM

Dear Customer,

It all started in 1946 with two brothers and a small corner store in South Philadelphia. America was rebuilding after World War II, creating a spirit of optimism across the country. Seizing the opportunity to have their own storefront, Romolo and Stanley Angelo opened Angelo Brothers Paint & Lamp Store. Angelo Brothers quickly pivoted to a mail order catalog business, supplying lighting showrooms and lamp repair shops. With this, Angelo Brothers Company was born.

Over the past 75 years, our customers have always been our top priority. While our company has grown in size and scope, we have remained committed to our core values of customer service, quality products, and sustainability.

Consistent with our customer-first approach, we expanded our product line from lamp parts to include glassware, lamps (light bulbs), lighting fixtures, and ceiling fans. In 2003, the company rebranded as Westinghouse Lighting and began marketing our product line globally.

On behalf of the entire Westinghouse Lighting team, we look forward to serving our customers for many more years. It is particularly exciting as we have the third generation of family leadership working in the business. We will approach the next 75 years the same as we have the first 75 – by continuing to meet the ever-evolving needs of our customers and staying true to the core values instilled by our founders.

Ray Angelo  
President & CEO




**Westinghouse**



A Licensee of Westinghouse Electric Corporation



## FROM HUMBLE BEGINNINGS TO A GLOBAL PRESENCE

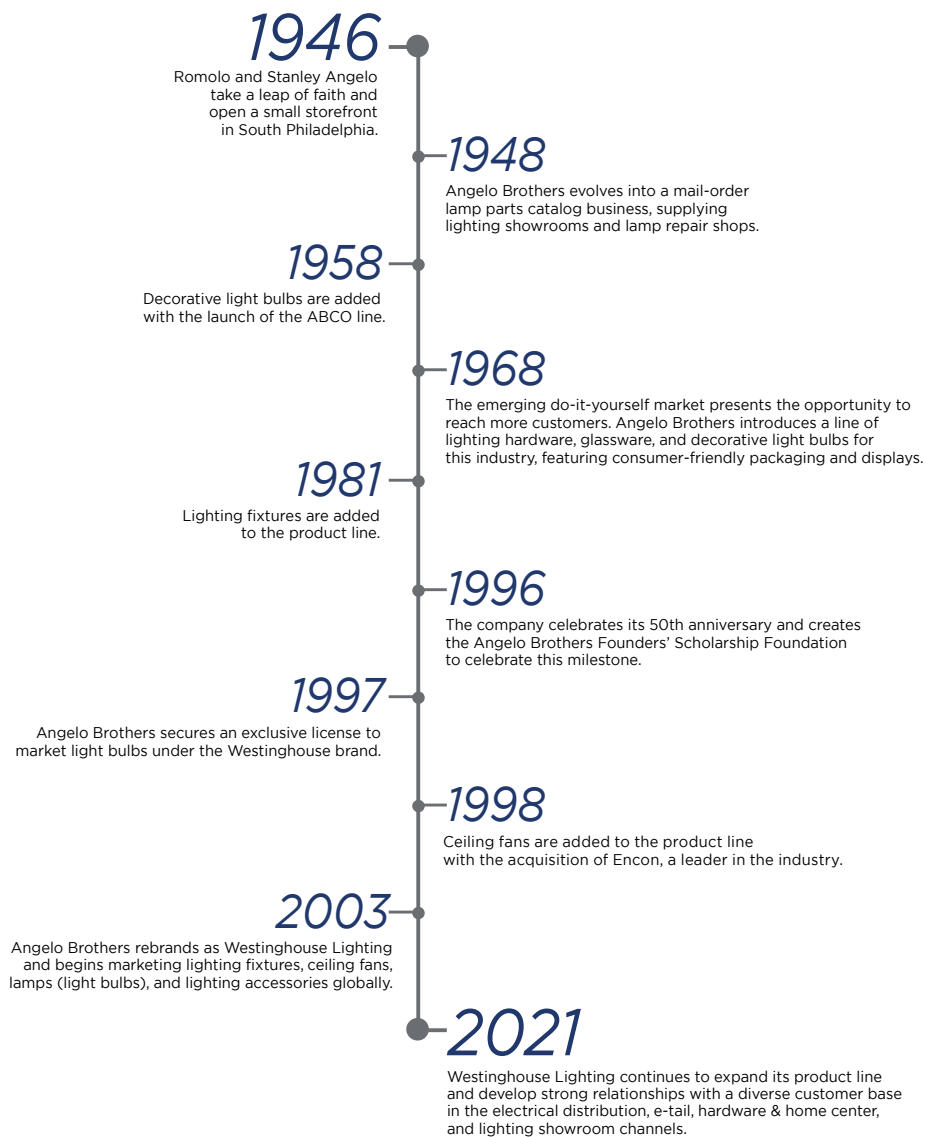

ENJOY A TRIP DOWN MEMORY LANE...  
SOME CATALOG COVERS THROUGH THE YEARS!



# LAMP REFERENCE GUIDE

Our lamp charts are full of information. Below is a breakdown of what it all means.

**ENERGY USED**  
Wattage measures the amount of energy that is actually used

**BASE**  
Base configuration or base size

**ENERGY STAR**

**DOMESTIC CODE**

Lamp Type      Base Type      Package Size/  
Voltage other than 120V

4C11/LED/CL/CB/27 2CD

Lamp Wattage      Dimmable/  
Finish/Beam Type      Kelvin

LED LAMPS

**DECORATIVE LAMPS**



| Item No.                                                                                              | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code           | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens)  | Avg. Rated Hours | Life in Years*                | Est. Yearly Energy Cost** | MOL   |
|-------------------------------------------------------------------------------------------------------|---------------------|-----------|-----------|-------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|----------------------|------------------|-------------------------------|---------------------------|-------|
| <b>TORPEDO</b>                                                                                        |                     |           |           |                         |              |                        |                   |        |                            |     |                      |                  |                               |                           |       |
| 43045                                                                                                 | 2.8                 | Cand.     | 2,4,7     | 2.8B11/LED/DIM/CL/CB/30 | Hanging Box  | 25                     | Warm White        | Clear  | 3000                       | 80  | 160                  | 25000            | 22.8                          | \$0.34                    | 3.78" |
| 50691                                                                                                 | 3.5                 | Cand.     | 2,4,7     | 3.5B11/LED/DIM/CL/CB/27 | Box          | 40                     | Warm White        | Clear  | 2700                       | 90  | 300                  | 25000            | 22.8                          | \$0.42                    | 3.78" |
| 50701                                                                                                 | 3.5                 | Med.      | 2,4,7     | 3.5B11/LED/DIM/CL/27    | Box          | 40                     | Warm White        | Clear  | 2700                       | 90  | 300                  | 25000            | 22.8                          | \$0.42                    | 3.78" |
| 53141                                                                                                 | 4.5                 | Cand.     | 2,4,7     | 4.5B11/LED/DIM/CL/CB/27 | Hanging Box  | 40                     | Warm White        | Clear  | 2700                       | 80  | 300                  | 25000            | 22.8                          | \$0.54                    | 3.78" |
| 53130                                                                                                 | 6.5                 | Cand.     | 2,4,7     | 6.5B13/LED/DIM/CL/CB/27 | Hanging Box  | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                  | 25000            | 22.8                          | \$0.78                    | 4.49" |
| 53132                                                                                                 | 6.5                 | Med.      | 2,4,7     | 6.5B13/LED/DIM/CL/27    | Hanging Box  | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                  | 25000            | 22.8                          | \$0.78                    | 4.61" |
| <b>FLAME TIP</b>                                                                                      |                     |           |           |                         |              |                        |                   |        |                            |     |                      |                  |                               |                           |       |
| 45124                                                                                                 | 4                   | Cand.     | 2,4,7     | 4C11/LED/CL/CB/27 2CD   | Card (2)     | 40                     | Warm White        | Clear  | 2700                       | 80  | 300                  | 15000            | 13.6                          | \$0.48                    | 4.00" |
| 45129                                                                                                 | 7                   | Cand.     | 2,4,7     | 7C13/LED/CL/CB/27 2CD   | Card (2)     | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                  | 15000            | 13.6                          | \$0.84                    | 4.49" |
| <p>Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.</p> |                     |           |           |                         |              |                        |                   |        |                            |     | *Based on 3 hrs./day |                  | **Based on 3 hrs./day 11¢/kWh |                           |       |

**ITEM NUMBER**  
Code used to place orders

**PACK TYPE**  
How the lamp is packaged

**FOOTNOTES**  
Important product attributes explained at the bottom of each page

**EQUIVALENT WATTAGE**  
Energy used by a comparable lamp

**BRIGHTNESS**  
Amount of light emitted from the lamp in lumens

**ESTIMATED YEARLY ENERGY COST**  
Cost to operate the lamp for 1 year based on 3 hours of daily use @ 11¢ kWh

**LIFE IN YEARS**  
Rated life based on 3 hours of daily use

**MOL**  
Maximum overall length in inches

# ENERGY-EFFICIENT LED LIGHTING

Our LED lamp assortment offers longer life and enhanced light output, as well as significant energy and cost savings when compared to other light sources. Westinghouse LED lamps are available in a variety of shapes and sizes for residential and commercial applications.



## DECORATIVE FILAMENT LAMPS

LAMPS SHOWN UNLIT



B11 CLEAR



CA11 CLEAR



F15 CLEAR

| Item No.               | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                       | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------------------|---------------------|-----------|-----------|-------------------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>B11 DECORATIVE</b>  |                     |           |           |                                     |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 50591                  | 2.5                 | Cand.     | 2,4,7     | 2.5B11/FilamentLED/DIM/CL/CB/27     | Box          | 25                     | Warm White        | Clear  | 2700                       | 80  | 200                 | 15000            | 13.6           | \$0.30                    | 3.82" |
| 35171                  | 4                   | Cand.     | 2,4,7     | 4B11/FilamentLED/DIM/CL/CB/27       | Box          | 40                     | Warm White        | Clear  | 2700                       | 80  | 300                 | 15000            | 13.6           | \$0.48                    | 3.82" |
| 50621                  | 4.5                 | Cand.     | 2,4,7     | 4.5B11/FilamentLED/DIM/CL/CB/27 2CD | Card (2)     | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.54                    | 3.82" |
| 43168                  | 4.5                 | Cand.     | 2,4,7     | 4.5B11/FilamentLED/DIM/CL/CB/27     | Box          | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.54                    | 3.82" |
| 43169                  | 4.5                 | Med.      | 2,4,7     | 4.5B11/FilamentLED/DIM/CL/27        | Box          | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.54                    | 3.58" |
| <b>CA11 DECORATIVE</b> |                     |           |           |                                     |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 35172                  | 4                   | Cand.     | 2,4,7     | 4CA11/FilamentLED/DIM/CL/CB/27      | Box          | 40                     | Warm White        | Clear  | 2700                       | 80  | 300                 | 15000            | 13.6           | \$0.48                    | 3.82" |
| 51130                  | 4                   | Med.      | 2,4,7     | 4CA11/FilamentLED/DIM/CL/27         | Box          | 40                     | Warm White        | Clear  | 2700                       | 80  | 365                 | 15000            | 13.6           | \$0.48                    | 4.22" |
| 43170                  | 4.5                 | Cand.     | 2,4,7     | 4.5CA11/FilamentLED/DIM/CL/CB/27    | Box          | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.54                    | 4.37" |
| 43171                  | 4.5                 | Med.      | 2,4,7     | 4.5CA11/FilamentLED/DIM/CL/27       | Box          | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.54                    | 4.13" |
| <b>F15</b>             |                     |           |           |                                     |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 33193                  | 2.5                 | Med.      | 2,4,7     | 2.5F15/FilamentLED/DIM/CL/27 1CD    | Card         | 25                     | Warm White        | Clear  | 2700                       | 80  | 250                 | 15000            | 13.6           | \$0.30                    | 4.33" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

## DECORATIVE GLOWESCENT® LAMPS (SPUN SATIN)

LAMPS SHOWN UNLIT



C11 WHITE



C15 WHITE



H19 WHITE

| Item No.              | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                     | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-----------------------|---------------------|-----------|-----------|-----------------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>C11 DECORATIVE</b> |                     |           |           |                                   |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 52070                 | 4.5                 | Cand.     | 2,4,7     | 4.5C11/GlowescentLED/DIM/WH/CB/27 | Box          | 60                     | Warm White        | White  | 2700                       | 80  | 480                 | 15000            | 13.6           | \$0.54                    | 3.86" |
| <b>C15 DECORATIVE</b> |                     |           |           |                                   |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 52100                 | 4.5                 | Med.      | 2,4,7     | 4.5C15/GlowescentLED/DIM/WH/27    | Box          | 60                     | Warm White        | White  | 2700                       | 80  | 480                 | 15000            | 13.6           | \$0.54                    | 4.33" |
| <b>H19 DECORATIVE</b> |                     |           |           |                                   |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 52110                 | 7.5                 | Med.      | 2,4,7     | 7.5H19/GlowescentLED/DIM/WH/27    | Box          | 75                     | Warm White        | White  | 2700                       | 80  | 800                 | 15000            | 13.6           | \$0.90                    | 5.79" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

### Footnotes

- |            |                              |                             |                                                 |
|------------|------------------------------|-----------------------------|-------------------------------------------------|
| 1 New Item | 3 Low Voltage (12V)          | 5 Approved for Wet Location | 7 Approved for Use in Totally Enclosed Fixtures |
| 2 Dimmable | 4 Approved for Damp Location | 6 Indoor Application Only   |                                                 |

# FILAMENT LAMPS

LAMPS SHOWN UNLIT



| Item No.           | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                     | Package Type | Equiv. Incand. Wattage | Color Designation | Finish      | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|--------------------|---------------------|-----------|-----------|-----------------------------------|--------------|------------------------|-------------------|-------------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>A15</b>         |                     |           |           |                                   |              |                        |                   |             |                            |     |                     |                  |                |                           |       |
| 43166              | 4.5                 | Med.      | 2,4,7     | 4.5A15/FilamentLED/DIM/CL/27      | Box          | 40                     | Warm White        | Clear       | 2700                       | 80  | 470                 | 15000            | 13.6           | \$0.54                    | 3.30" |
| <b>A19</b>         |                     |           |           |                                   |              |                        |                   |             |                            |     |                     |                  |                |                           |       |
| 53164              | 4.5                 | Med.      | 2,4,7     | 4.5A19/FilamentLED/DIM/CL/27      | Box          | 40                     | Warm White        | Clear       | 2700                       | 80  | 470                 | 15000            | 13.6           | \$0.54                    | 4.13" |
| 51351              | 4.5                 | Med.      | 2,4,7     | 4.5A19/FilamentLED/DIM/CL/27 2PK  | Box (2)      | 40                     | Warm White        | Clear       | 2700                       | 80  | 470                 | 15000            | 13.6           | \$0.54                    | 4.13" |
| 53165              | 6.5                 | Med.      | 2,4,7     | 6.5A19/FilamentLED/DIM/CL/27      | Box          | 60                     | Warm White        | Clear       | 2700                       | 80  | 810                 | 15000            | 13.6           | \$0.78                    | 4.13" |
| 51361              | 6.5                 | Med.      | 2,4,7     | 6.5A19/FilamentLED/DIM/CL/27 2PK  | Box (2)      | 60                     | Warm White        | Clear       | 2700                       | 80  | 810                 | 15000            | 13.6           | \$0.78                    | 4.13" |
| 50163              | 6.5                 | Med.      | 2,4,7     | 6.5A19/FilamentLED/DIM/SW/27      | Box          | 60                     | Warm White        | Soft White  | 2700                       | 80  | 810                 | 15000            | 13.6           | \$0.78                    | 4.13" |
| 52240              | 9                   | Med.      | 2,4,7     | 9A19/FilamentLED/DIM/CL/27        | Box          | 60                     | Warm White        | Clear       | 2700                       | 80  | 800                 | 15000            | 13.6           | \$1.08                    | 4.17" |
| 51671              | 10                  | Med.      | 2,4,7     | 10A19/FilamentLED/DIM/CL/27       | Box          | 75                     | Warm White        | Clear       | 2700                       | 80  | 1100                | 15000            | 13.6           | \$1.20                    | 4.13" |
| <b>G16.5 GLOBE</b> |                     |           |           |                                   |              |                        |                   |             |                            |     |                     |                  |                |                           |       |
| 50231              | 4                   | Cand.     | 2,4,7     | 4G16.5/FilamentLED/DIM/CL/CB/27   | Box          | 40                     | Warm White        | Clear       | 2700                       | 80  | 300                 | 15000            | 13.6           | \$0.48                    | 3.23" |
| 50242              | 4.5                 | Cand.     | 2,4,7     | 4.5G16.5/FilamentLED/DIM/CL/CB/27 | Box          | 60                     | Warm White        | Clear       | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.54                    | 3.23" |
| <b>G25 GLOBE</b>   |                     |           |           |                                   |              |                        |                   |             |                            |     |                     |                  |                |                           |       |
| 51691              | 4.5                 | Med.      | 2,4,7     | 4.5G25/FilamentLED/DIM/CH/27      | Box          | 40                     | Warm White        | Half Chrome | 2700                       | 80  | 400                 | 15000            | 13.6           | \$0.54                    | 4.72" |
| 43172              | 5.5                 | Med.      | 2,4,7     | 5.5G25/FilamentLED/DIM/CL/27      | Box          | 40                     | Warm White        | Clear       | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.66                    | 4.52" |
| 50172              | 5.5                 | Med.      | 2,4,7     | 5.5G25/FilamentLED/DIM/SW/27      | Box          | 40                     | Warm White        | Soft White  | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.66                    | 4.52" |
| 50182              | 6.5                 | Med.      | 2,4,7     | 6.5G25/FilamentLED/DIM/SW/27      | Box          | 60                     | Warm White        | Soft White  | 2700                       | 80  | 810                 | 15000            | 13.6           | \$0.78                    | 4.52" |
| 43173              | 6.5                 | Med.      | 2,4,7     | 6.5G25/FilamentLED/DIM/CL/27      | Box          | 60                     | Warm White        | Clear       | 2700                       | 80  | 810                 | 15000            | 13.6           | \$0.78                    | 4.52" |
| <b>G40 GLOBE</b>   |                     |           |           |                                   |              |                        |                   |             |                            |     |                     |                  |                |                           |       |
| 53175              | 6.5                 | Med.      | 2,4,7     | 6.5G40/FilamentLED/DIM/CL/27      | Box          | 60                     | Warm White        | Clear       | 2700                       | 80  | 810                 | 15000            | 13.6           | \$0.78                    | 6.57" |
| <b>ST15</b>        |                     |           |           |                                   |              |                        |                   |             |                            |     |                     |                  |                |                           |       |
| 45186              | 4.5                 | Med.      | 2,4,7     | 4.5ST15/FilamentLED/DIM/CL/27     | Box          | 40                     | Warm White        | Clear       | 2700                       | 80  | 470                 | 15000            | 13.6           | \$0.54                    | 4.65" |
| 45187              | 6.5                 | Med.      | 2,4,7     | 6.5ST15/FilamentLED/DIM/CL/27     | Box          | 60                     | Warm White        | Clear       | 2700                       | 80  | 800                 | 15000            | 13.6           | \$0.78                    | 4.65" |
| <b>ST20</b>        |                     |           |           |                                   |              |                        |                   |             |                            |     |                     |                  |                |                           |       |
| 45182              | 4.5                 | Med.      | 2,4,7     | 4.5ST20/FilamentLED/DIM/CL/27     | Box          | 40                     | Warm White        | Clear       | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.54                    | 5.43" |
| 45183              | 6.5                 | Med.      | 2,4,7     | 6.5ST20/FilamentLED/DIM/CL/27     | Box          | 60                     | Warm White        | Clear       | 2700                       | 80  | 810                 | 15000            | 13.6           | \$0.78                    | 5.43" |
| 53178              | 6.5                 | Med.      | 2,4,7     | 6.5ST20/FilamentLED/DIM/A/22      | Box          | 60                     | Warm White        | Amber       | 2200                       | 80  | 630                 | 15000            | 13.6           | \$0.78                    | 5.43" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

## Footnotes

- 1 New Item  
2 Dimmable

- 3 Low Voltage (12V)  
4 Approved for Damp Location

- 5 Approved for Wet Location  
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures



# FILAMENT T LAMPS

LAMPS SHOWN UNLIT



T6



T6.5



T9



T10

| Item No.             | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                    | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL    |
|----------------------|---------------------|-----------|-----------|----------------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|--------|
| <b>T6 &amp; T6.5</b> |                     |           |           |                                  |              |                        |                   |        |                            |     |                     |                  |                |                           |        |
| 51580                | 2.5                 | Cand.     | 2,4,7     | 2.5T6/FilamentLED/DIM/CL/CB/27   | Box          | 25                     | Warm White        | Clear  | 2700                       | 80  | 200                 | 15000            | 13.6           | \$0.30                    | 3.15"  |
| 51940                | 4                   | Inter.    | 2,4,7     | 4T6.5/FilamentLED/DIM/CL/IN/27   | Box          | 40                     | Warm White        | Clear  | 2700                       | 80  | 350                 | 15000            | 13.6           | \$0.48                    | 4.65"  |
| 51680                | 4.5                 | Cand.     | 2,4,7     | 4.5T6/FilamentLED/DIM/CL/CB/27   | Box          | 40                     | Warm White        | Clear  | 2700                       | 80  | 450                 | 15000            | 13.6           | \$0.54                    | 3.23"  |
| <b>T9</b>            |                     |           |           |                                  |              |                        |                   |        |                            |     |                     |                  |                |                           |        |
| 45184                | 4.5                 | Med.      | 2,4,7     | 4.5T9/FilamentLED/DIM/CL/27 1CD  | Card         | 60                     | Warm White        | Clear  | 2700                       | 80  | 450                 | 15000            | 13.6           | \$0.54                    | 7.10"  |
| 35188                | 6.5                 | Med.      | 2,4,7     | 6.5T9/FilamentLED/DIM/CL/27 1CD  | Card         | 75                     | Warm White        | Clear  | 2700                       | 80  | 800                 | 15000            | 13.6           | \$0.78                    | 11.97" |
| <b>T10</b>           |                     |           |           |                                  |              |                        |                   |        |                            |     |                     |                  |                |                           |        |
| 45185                | 3.5                 | Med.      | 2,4,7     | 3.5T10/FilamentLED/DIM/CL/27 1CD | Card         | 60                     | Warm White        | Clear  | 2700                       | 80  | 350                 | 15000            | 13.6           | \$0.42                    | 4.92"  |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

## Footnotes

1 New Item  
2 Dimmable3 Low Voltage (12V)  
4 Approved for Damp Location5 Approved for Wet Location  
6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



B11



B13



C11



C13

## DECORATIVE LAMPS

| Item No.         | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code           | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------------|---------------------|-----------|-----------|-------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>TORPEDO</b>   |                     |           |           |                         |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 43045            | 2.8                 | Cand.     | 2,4,7     | 2.8B11/LED/DIM/CL/CB/30 | Hanging Box  | 25                     | Warm White        | Clear  | 3000                       | 80  | 160                 | 25000            | 22.8           | \$0.34                    | 3.78" |
| 24 50691         | 3.5                 | Cand.     | 2,4,7     | 3.5B11/LED/DIM/CL/CB/27 | Box          | 40                     | Warm White        | Clear  | 2700                       | 90  | 300                 | 25000            | 22.8           | \$0.42                    | 3.78" |
| 24 50701         | 3.5                 | Med.      | 2,4,7     | 3.5B11/LED/DIM/CL/27    | Box          | 40                     | Warm White        | Clear  | 2700                       | 90  | 300                 | 25000            | 22.8           | \$0.42                    | 3.78" |
| 53141            | 4.5                 | Cand.     | 2,4,7     | 4.5B11/LED/DIM/CL/CB/27 | Hanging Box  | 40                     | Warm White        | Clear  | 2700                       | 80  | 300                 | 25000            | 22.8           | \$0.54                    | 3.78" |
| 53130            | 6.5                 | Cand.     | 2,4,7     | 6.5B13/LED/DIM/CL/CB/27 | Hanging Box  | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                 | 25000            | 22.8           | \$0.78                    | 4.49" |
| 53132            | 6.5                 | Med.      | 2,4,7     | 6.5B13/LED/DIM/CL/27    | Hanging Box  | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                 | 25000            | 22.8           | \$0.78                    | 4.61" |
| <b>FLAME TIP</b> |                     |           |           |                         |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 45124            | 4                   | Cand.     | 2,4,7     | 4C11/LED/CL/CB/27 2CD   | Card (2)     | 40                     | Warm White        | Clear  | 2700                       | 80  | 300                 | 15000            | 13.6           | \$0.48                    | 4.00" |
| 45129            | 7                   | Cand.     | 2,4,7     | 7C13/LED/CL/CB/27 2CD   | Card (2)     | 60                     | Warm White        | Clear  | 2700                       | 80  | 500                 | 15000            | 13.6           | \$0.84                    | 4.49" |

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh



OMNI A15

## GENERAL PURPOSE LAMPS

| Item No.        | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                | Package Type | Equiv. Incand. Wattage | Color Designation | Finish     | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-----------------|---------------------|-----------|-----------|------------------------------|--------------|------------------------|-------------------|------------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>OMNI A15</b> |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 45134           | 5                   | Med.      | 4,7       | 5OMNIA15/LED/SW/27 1CD       | Card         | 40                     | Warm White        | Soft White | 2700                       | 80  | 450                 | 15000            | 13.6           | \$0.60                    | 3.54" |
| 45136           | 5.5                 | Med.      | 4,7       | 5.5OMNIA15/LED/SW/27 1CD     | Card         | 60                     | Warm White        | Soft White | 2700                       | 80  | 600                 | 15000            | 13.6           | \$0.66                    | 3.55" |
| 33191           | 5.5                 | Med.      | 2,4,7     | 5.5OMNIA15/LED/DIM/SW/27 1CD | Card         | 40                     | Warm White        | Soft White | 2700                       | 80  | 450                 | 25000            | 22.8           | \$0.66                    | 3.54" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

## Footnotes

- 1 New Item  
2 Dimmable

- 3 Low Voltage (12V)  
4 Approved for Damp Location

- 5 Approved for Wet Location  
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures



OMNI A19

OMNI A19  
GU24 BASE

A19

## GENERAL PURPOSE LAMPS

| Item No.        | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                 | Package Type | Equiv. Incand. Wattage | Color Designation | Finish     | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours     | Life in Years* | Est. Yearly Energy Cost** | MOL          |
|-----------------|---------------------|-----------|-----------|-------------------------------|--------------|------------------------|-------------------|------------|----------------------------|---------------------|----------------------|----------------|---------------------------|--------------|
| <b>OMNI A19</b> |                     |           |           |                               |              |                        |                   |            |                            |                     |                      |                |                           |              |
| 51850           | 6                   | Med.      | 2,4,7     | 60MNIA19/LED/DIM/SW/27        | Box          | 40                     | Warm White        | Soft White | 2700                       | 80                  | 480                  | 25000          | 22.8                      | \$0.72 4.33" |
| 51321           | 6                   | Med.      | 2,4,7     | 60MNIA19/LED/DIM/SW/30        | Box          | 40                     | Warm White        | Soft White | 3000                       | 80                  | 480                  | 25000          | 22.8                      | \$0.72 4.44" |
| 53189           | 6                   | Med.      | 4,7       | 60MNIA19/LED/SW/30            | Box          | 40                     | Warm White        | Soft White | 3000                       | 80                  | 480                  | 15000          | 13.6                      | \$0.72 4.33" |
| 35156           | 6                   | Med.      | 4,7       | 60MNIA19/LED/SW/30 4PK        | Box (4)      | 40                     | Warm White        | Soft White | 3000                       | 80                  | 480                  | 15000          | 13.6                      | \$0.72 4.33" |
| 45138           | 6                   | Med.      | 4,7       | 60MNIA19/LED/SW/50            | Box          | 40                     | Daylight          | Soft White | 5000                       | 80                  | 480                  | 15000          | 13.6                      | \$0.72 4.33" |
| 43697           | 9                   | Med.      | 4,7       | 90MNIA19/LED/SW/27            | Box          | 60                     | Warm White        | Soft White | 2700                       | 80                  | 800                  | 25000          | 22.8                      | \$1.08 4.33" |
| 51840           | 9                   | Med.      | 2,4,7     | 90MNIA19/LED/DIM/SW/27        | Box          | 60                     | Warm White        | Soft White | 2700                       | 80                  | 800                  | 25000          | 22.8                      | \$1.08 4.44" |
| 43440           | 9                   | Med.      | 4,7       | 90MNIA19/LED/SW/30 1CD        | Card         | 60                     | Warm White        | Soft White | 3000                       | 80                  | 800                  | 25000          | 22.8                      | \$1.08 4.33" |
| 51830           | 9                   | Med.      | 2,4,7     | 90MNIA19/LED/DIM/SW/30 1CD    | Card         | 60                     | Warm White        | Soft White | 3000                       | 80                  | 800                  | 25000          | 22.8                      | \$1.08 4.44" |
| 24 50741        | 9                   | Med.      | 2,4,7     | 90MNIA19/LED/DIM/SW/30        | Box          | 60                     | Warm White        | Soft White | 3000                       | 90                  | 810                  | 25000          | 22.8                      | \$1.08 4.25" |
| 51331           | 9                   | Med.      | 2,4,7     | 90MNIA19/LED/DIM/SW/30        | Box          | 60                     | Warm White        | Soft White | 3000                       | 80                  | 800                  | 25000          | 22.8                      | \$1.08 4.44" |
| 51341           | 9                   | Med.      | 2,4,7     | 90MNIA19/LED/DIM/SW/50        | Box          | 60                     | Daylight          | Soft White | 5000                       | 80                  | 800                  | 25000          | 22.8                      | \$1.08 4.44" |
| 50771           | 9                   | Med.      | 2,4,7     | 90MNIA19/LED/DIM/SW/40        | Box          | 60                     | Cool White        | Soft White | 4000                       | 80                  | 800                  | 25000          | 22.8                      | \$1.08 4.44" |
| 35173           | 9.5                 | Med.      | 4,7       | 9.5OMNIA19/LED/SW/27 12PK     | Box (12)     | 60                     | Warm White        | Soft White | 2700                       | 80                  | 800                  | 15000          | 13.6                      | \$1.14 4.33" |
| 53127           | 9.5                 | Med.      | 4,7       | 9.5OMNIA19/LED/SW/30          | Box          | 60                     | Warm White        | Soft White | 3000                       | 80                  | 800                  | 15000          | 13.6                      | \$1.14 4.33" |
| 45160           | 9.5                 | Med.      | 4,7       | 9.5OMNIA19/LED/SW/30 4PK      | Box (4)      | 60                     | Warm White        | Soft White | 3000                       | 80                  | 800                  | 15000          | 13.6                      | \$1.14 4.33" |
| 45140           | 9.5                 | Med.      | 4,7       | 9.5OMNIA19/LED/SW/50          | Box          | 60                     | Daylight          | Soft White | 5000                       | 80                  | 800                  | 15000          | 13.6                      | \$1.14 4.33" |
| 53158           | 9.8                 | GU24      | 2,4,7     | 9.8OMNIA19/LED/DIM/SW/GU24/27 | Box          | 60                     | Warm White        | Soft White | 2700                       | 80                  | 800                  | 25000          | 22.8                      | \$1.18 4.33" |
| 51951           | 11                  | Med.      | 2,4,7     | 11OMNIA19/LED/DIM/SW/27       | Box          | 75                     | Warm White        | Soft White | 2700                       | 80                  | 1100                 | 25000          | 22.8                      | \$1.32 4.33" |
| 53190           | 11                  | Med.      | 4,7       | 11OMNIA19/LED/SW/30           | Box          | 75                     | Warm White        | Soft White | 3000                       | 80                  | 1100                 | 15000          | 13.6                      | \$1.32 4.49" |
| 45157           | 11                  | Med.      | 4,7       | 11OMNIA19/LED/SW/30 2PK       | Box (2)      | 75                     | Warm White        | Soft White | 3000                       | 80                  | 1100                 | 15000          | 13.6                      | \$1.32 4.49" |
| 50811           | 11                  | Med.      | 2,4,7     | 11OMNIA19/LED/DIM/SW/30       | Box          | 75                     | Warm White        | Soft White | 3000                       | 80                  | 1100                 | 25000          | 22.8                      | \$1.32 4.33" |
| 45141           | 11                  | Med.      | 4,7       | 11OMNIA19/LED/SW/50           | Box          | 75                     | Daylight          | Soft White | 5000                       | 80                  | 1100                 | 15000          | 13.6                      | \$1.32 4.49" |
| 55145           | 11                  | Med.      | 2,4,7     | 11OMNIA19/LED/DIM/SW/50       | Box          | 75                     | Daylight          | Soft White | 5000                       | 80                  | 1100                 | 25000          | 22.8                      | \$1.32 4.33" |
| 53140           | 3/9/12              | Med.      | 2,4,7     | 3/9/12OMNIA19/LED/3WAY/SW/27  | Box          | 30/<br>70/<br>100      | Warm White        | Soft White | 2700                       | 80                  | 280/<br>950/<br>1200 | 25000          | 22.8                      | \$1.45 4.65" |
| 50940           | 15                  | Med.      | 2,4,7     | 15OMNIA19/LED/DIM/SW/27       | Box          | 100                    | Warm White        | Soft White | 2700                       | 80                  | 1600                 | 25000          | 22.8                      | \$1.81 4.92" |
| 51970           | 15                  | Med.      | 2,4,7     | 15OMNIA19/LED/DIM/SW/30       | Box          | 100                    | Warm White        | Soft White | 3000                       | 80                  | 1600                 | 25000          | 22.8                      | \$1.81 4.92" |
| 50750           | 15                  | Med.      | 2,4,7     | 15OMNIA19/LED/DIM/SW/40       | Box          | 100                    | Cool White        | Soft White | 4000                       | 80                  | 1600                 | 25000          | 22.8                      | \$1.81 4.64" |
| 50760           | 15.5                | Med.      | 4,7       | 15.5OMNIA19/LED/SW/40         | Box          | 100                    | Cool White        | Soft White | 4000                       | 80                  | 1600                 | 15000          | 13.6                      | \$1.87 4.64" |
| 50790           | 15.5                | Med.      | 4,7       | 15.5OMNIA19/LED/SW/50         | Box          | 100                    | Daylight          | Soft White | 5000                       | 80                  | 1600                 | 15000          | 13.6                      | \$1.87 4.64" |
| <b>A19</b>      |                     |           |           |                               |              |                        |                   |            |                            |                     |                      |                |                           |              |
| 52280           | 14                  | Med.      | 4,7       | 14A19/LED/SW/30               | Box          | 100                    | Warm White        | Soft White | 3000                       | 80                  | 1500                 | 15000          | 13.6                      | \$1.69 4.25" |
| 52300           | 14                  | Med.      | 4,7       | 14A19/LED/SW/30 2PK           | Box (2)      | 100                    | Warm White        | Soft White | 3000                       | 80                  | 1500                 | 15000          | 13.6                      | \$1.69 4.25" |
| 52290           | 14                  | Med.      | 4,7       | 14A19/LED/SW/50               | Box          | 100                    | Daylight          | Soft White | 5000                       | 80                  | 1500                 | 15000          | 13.6                      | \$1.69 4.25" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

## Footnotes

1 New Item  
2 Dimmable

3 Low Voltage (12V)  
4 Approved for Damp Location

5 Approved for Wet Location  
6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures

## COLOR GENERAL PURPOSE LAMPS

OMNI A19  
REDOMNI A19  
BLUEOMNI A19  
GREEN

| Item No.                          | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code  | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-----------------------------------|---------------------|-----------|-----------|----------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>SPECIALTY - COLOR OMNI A19</b> |                     |           |           |                |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 03153                             | 5                   | Med.      | 4,7       | 5OMNIA19/LED/R | Box          | 40                     | —                 | Red    | —                          | —   | —                   | 25000            | 22.8           | \$0.60                    | 4.33" |
| 03154                             | 6                   | Med.      | 4,7       | 6OMNIA19/LED/B | Box          | 40                     | —                 | Blue   | —                          | —   | —                   | 25000            | 22.8           | \$0.72                    | 4.33" |
| 03152                             | 6                   | Med.      | 4,7       | 6OMNIA19/LED/G | Box          | 40                     | —                 | Green  | —                          | —   | —                   | 25000            | 22.8           | \$0.72                    | 4.33" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

## SPECIALTY 120-277V LAMPS



OMNI A21

OMNI A23

| Item No.        | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                | Package Type | Equiv. Incand. Wattage | Color Designation | Finish     | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-----------------|---------------------|-----------|-----------|------------------------------|--------------|------------------------|-------------------|------------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>OMNI A21</b> |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 51170           | 19                  | Med.      | 4,7       | 19OMNIA21/LED/SW/120-277V/50 | Box          | 125                    | Daylight          | Soft White | 5000                       | 80  | 2000                | 25000            | 22.8           | \$2.29                    | 5.55" |
| 51590           | 25                  | Med.      | 4,7       | 25OMNIA21/LED/SW/120-277V/30 | Box          | 150                    | Warm White        | Soft White | 3000                       | 80  | 2550                | 25000            | 22.8           | \$3.01                    | 5.47" |
| 51700           | 25                  | Med.      | 4,7       | 25OMNIA21/LED/SW/120-277V/50 | Box          | 150                    | Daylight          | Soft White | 5000                       | 80  | 2550                | 25000            | 22.8           | \$3.01                    | 5.47" |
| <b>OMNI A23</b> |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 51600           | 29                  | Med.      | 4,7       | 29OMNIA23/LED/SW/120-277V/30 | Box          | 200                    | Warm White        | Soft White | 3000                       | 80  | 3050                | 25000            | 22.8           | \$3.49                    | 6.30" |
| 51710           | 29                  | Med.      | 4,7       | 29OMNIA23/LED/SW/120-277V/50 | Box          | 200                    | Daylight          | Soft White | 5000                       | 80  | 3050                | 25000            | 22.8           | \$3.49                    | 6.30" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

## GLOBE LAMPS

G16.5  
SOFT WHITE/CLEARG25  
SOFT WHITE

| Item No.           | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code               | Package Type | Equiv. Incand. Wattage | Color Designation | Finish     | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|--------------------|---------------------|-----------|-----------|-----------------------------|--------------|------------------------|-------------------|------------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>G16.5 GLOBE</b> |                     |           |           |                             |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 53128              | 7                   | Cand.     | 2,4,7     | 7G16.5/LED/DIM/CL/CB/27     | Box          | 60                     | Warm White        | Clear      | 2700                       | 80  | 500                 | 25000            | 22.8           | \$0.84                    | 2.76" |
| 45131              | 7                   | Cand.     | 2,4,7     | 7G16.5/LED/DIM/SW/CB/27 1CD | Card         | 60                     | Warm White        | Soft White | 2700                       | 80  | 500                 | 25000            | 22.8           | \$0.84                    | 2.75" |
| 53129              | 7                   | Med.      | 2,4,7     | 7G16.5/LED/DIM/CL/27        | Box          | 60                     | Warm White        | Clear      | 2700                       | 80  | 500                 | 25000            | 22.8           | \$0.84                    | 2.91" |
| <b>G25 GLOBE</b>   |                     |           |           |                             |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 53011              | 6                   | Med.      | 2,4,7     | 6G25/LED/DIM/SW/30          | Box          | 75                     | Warm White        | Soft White | 3000                       | 80  | 590                 | 25000            | 22.8           | \$0.72                    | 4.33" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

### Footnotes

- 1 New Item  
2 Dimmable

- 3 Low Voltage (12V)  
4 Approved for Damp Location

- 5 Approved for Wet Location  
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures

## REFLECTOR LAMPS



| Item No.                         | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                | Package Type | Equiv. Incand. Wattage | Color Designation | Finish     | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|----------------------------------|---------------------|-----------|-----------|------------------------------|--------------|------------------------|-------------------|------------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>MR11</b>                      |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 35152                            | 4                   | GU4       | 4,7       | 4MR11/LED/FL/GU4/30 1CD      | Card         | 25                     | Warm White        | White      | 3000                       | 80  | 250                 | 25000            | 22.8           | \$0.48                    | 1.69" |
| 35153                            | 4                   | GU10      | 2,4,7     | 4MR11/LED/DIM/FL/GU10/30 1CD | Card         | 25                     | Warm White        | White      | 3000                       | 80  | 250                 | 25000            | 22.8           | \$0.48                    | 1.89" |
| <b>MR16</b>                      |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 33638                            | 4.5                 | GU5.3     | 2,4,7     | 4.5MR16/LED/DIM/FL/30        | Hanging Box  | 35                     | Warm White        | Clear      | 3000                       | 80  | 360                 | 25000            | 22.8           | \$0.54                    | 1.85" |
| 33491                            | 6.5                 | GU5.3     | 2,4,7     | 6.5MR16/LED/DIM/FL/30        | Hanging Box  | 50                     | Warm White        | Clear      | 3000                       | 80  | 500                 | 25000            | 22.8           | \$0.78                    | 1.85" |
| 53032                            | 6.5                 | GU10      | 2,4,7     | 6.5MR16/LED/DIM/FL/GU10/30   | Box          | 50                     | Warm White        | Frost      | 3000                       | 80  | 500                 | 25000            | 22.8           | \$0.78                    | 2.16" |
| <b>R14 REFLECTOR</b>             |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 45154                            | 4                   | Inter.    | 2,4,7     | 4R14/LED/DIM/FL/IN/27 1CD    | Card         | 25                     | Warm White        | Soft White | 2700                       | 80  | 280                 | 25000            | 22.8           | \$0.48                    | 2.55" |
| <b>R20 REFLECTORS</b>            |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 53050                            | 6.5                 | Med.      | 2,4,7     | 6.5R20/LED/DIM/FL/27         | Box          | 50                     | Warm White        | Frost      | 2700                       | 80  | 525                 | 25000            | 22.8           | \$0.78                    | 3.93" |
| 53161                            | 6.5                 | Med.      | 2,4,7     | 6.5R20/LED/DIM/FL/30         | Box          | 50                     | Warm White        | Frost      | 3000                       | 80  | 525                 | 25000            | 22.8           | \$0.78                    | 3.93" |
| 50110                            | 6.5                 | Med.      | 2,4,7     | 6.5R20/LED/DIM/FL/40         | Box          | 50                     | Cool White        | Frost      | 4000                       | 80  | 525                 | 25000            | 22.8           | \$0.78                    | 3.93" |
| 50120                            | 6.5                 | Med.      | 2,4,7     | 6.5R20/LED/DIM/FL/50         | Box          | 50                     | Daylight          | Frost      | 5000                       | 80  | 525                 | 25000            | 22.8           | \$0.78                    | 3.93" |
| <b>BR30 &amp; R30 REFLECTORS</b> |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 53000                            | 8                   | Med.      | 2,4       | 8R30/LED/DIM/FL/27           | Box          | 65                     | Warm White        | Frost      | 2700                       | 80  | 650                 | 25000            | 22.8           | \$0.96                    | 5.16" |
| 33159                            | 8                   | GU24      | 2,4       | 8R30/LED/DIM/FL/GU24/27      | Box          | 65                     | Warm White        | Frost      | 2700                       | 80  | 650                 | 25000            | 22.8           | \$0.96                    | 4.96" |
| 52200                            | 9                   | Med.      | 2,4,7     | 9BR30/LED/DIM/FL/27          | Box          | 65                     | Warm White        | Frost      | 2700                       | 80  | 750                 | 25000            | 22.8           | \$1.08                    | 5.24" |
| 35174                            | 9                   | Med.      | 2,4,7     | 9BR30/LED/DIM/FL/27 12PK     | Box (12)     | 65                     | Warm White        | Frost      | 2700                       | 80  | 750                 | 25000            | 22.8           | \$1.08                    | 5.24" |
| 52210                            | 9                   | Med.      | 2,4,7     | 9BR30/LED/DIM/FL/30          | Box          | 65                     | Warm White        | Frost      | 3000                       | 80  | 750                 | 25000            | 22.8           | \$1.08                    | 5.24" |
| 50081                            | 9                   | Med.      | 2,4,7     | 9BR30/LED/DIM/FL/40          | Box          | 65                     | Cool White        | Frost      | 4000                       | 80  | 750                 | 25000            | 22.8           | \$1.08                    | 5.24" |
| 45148                            | 9                   | Med.      | 2,4,7     | 9BR30/LED/DIM/FL/50          | Box          | 65                     | Daylight          | Frost      | 5000                       | 80  | 750                 | 25000            | 22.8           | \$1.08                    | 5.24" |
| <b>R40 REFLECTORS</b>            |                     |           |           |                              |              |                        |                   |            |                            |     |                     |                  |                |                           |       |
| 33163                            | 16.5                | Med.      | 2,4       | 16.5R40/LED/DIM/FL/27        | Box          | 85                     | Warm White        | Frost      | 2700                       | 80  | 1200                | 25000            | 22.8           | \$1.99                    | 6.46" |
| 53064                            | 16.5                | Med.      | 2,4       | 16.5R40/LED/DIM/FL/30        | Box          | 85                     | Warm White        | Frost      | 3000                       | 80  | 1200                | 25000            | 22.8           | \$1.99                    | 6.46" |
| 50140                            | 16.5                | Med.      | 2,4       | 16.5R40/LED/DIM/FL/50        | Box          | 85                     | Daylight          | Frost      | 5000                       | 80  | 1200                | 25000            | 22.8           | \$1.99                    | 6.46" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

## Footnotes

- 1 New Item  
2 Dimmable

- 3 Low Voltage (12V)  
4 Approved for Damp Location

- 5 Approved for Wet Location  
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures



## REFLECTOR LAMPS

| Item No.               | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                   | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------------------|---------------------|-----------|-----------|---------------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>PAR16 REFLECTOR</b> |                     |           |           |                                 |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 33067                  | 6                   | Med.      | 2,4,7     | 6PAR16/LED/DIM/FL/30            | Box          | 45                     | Warm White        | Clear  | 3000                       | 80  | 470                 | 25000            | 22.8           | \$0.72                    | 3.50" |
| <b>PAR20 REFLECTOR</b> |                     |           |           |                                 |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 53012                  | 7                   | Med.      | 2,5,7     | 7PAR20/LED/DIM/IndOutFL/30      | Box          | 50                     | Warm White        | Clear  | 3000                       | 80  | 490                 | 25000            | 22.8           | \$0.84                    | 3.50" |
| 50000                  | 7                   | Med.      | 2,4,7     | 7PAR20/LED/DIM/FL/40            | Box          | 50                     | Cool White        | Clear  | 4000                       | 80  | 490                 | 25000            | 22.8           | \$0.84                    | 3.50" |
| 50010                  | 7                   | Med.      | 2,4,7     | 7PAR20/LED/DIM/FL/50            | Box          | 50                     | Daylight          | Clear  | 5000                       | 80  | 490                 | 25000            | 22.8           | \$0.84                    | 3.50" |
| <b>PAR30 REFLECTOR</b> |                     |           |           |                                 |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 51800                  | 10                  | Med.      | 2,5,7     | 10PAR30S/LED/DIM/IndOutFL/30    | Box          | 75                     | Warm White        | Clear  | 3000                       | 80  | 840                 | 25000            | 22.8           | \$1.20                    | 3.58" |
| 50051                  | 10                  | Med.      | 2,5,7     | 10PAR30S/LED/DIM/IndOutFL/50    | Box          | 75                     | Daylight          | Clear  | 5000                       | 80  | 840                 | 25000            | 22.8           | \$1.20                    | 3.58" |
| 51450                  | 10                  | Med.      | 2,5,7     | 10PAR30/LED/DIM/IndOutFL/30     | Box          | 75                     | Warm White        | Clear  | 3000                       | 80  | 840                 | 25000            | 22.8           | \$1.20                    | 4.57" |
| 50020                  | 10                  | Med.      | 2,4,7     | 10PAR30/LED/DIM/FL/40           | Box          | 75                     | Cool White        | Clear  | 4000                       | 80  | 840                 | 25000            | 22.8           | \$1.20                    | 4.57" |
| <b>PAR38 REFLECTOR</b> |                     |           |           |                                 |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 53110 □                | 15                  | Med.      | 2,5,7     | 15PAR38/LED/DIM/IndOutFL/30     | Box          | 90                     | Warm White        | Clear  | 3000                       | 80  | 1350                | 25000            | 22.8           | \$1.81                    | 5.32" |
| 53114 □                | 15                  | Med.      | 2,5,7     | 15PAR38/LED/DIM/IndOutFL/30 2PK | Box (2)      | 90                     | Warm White        | Clear  | 3000                       | 80  | 1350                | 25000            | 22.8           | \$1.81                    | 5.32" |
| 50061                  | 15                  | Med.      | 2,5,7     | 15PAR38/LED/DIM/IndOutFL/40     | Box          | 90                     | Cool White        | Clear  | 4000                       | 80  | 1350                | 25000            | 22.8           | \$1.81                    | 5.32" |
| 50071                  | 15                  | Med.      | 2,5,7     | 15PAR38/LED/DIM/IndOutFL/50     | Box          | 90                     | Daylight          | Clear  | 5000                       | 80  | 1350                | 25000            | 22.8           | \$1.81                    | 5.32" |

□ IP65 Rated

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

INDOOR/OUTDOOR  
COLOR REFLECTOR LAMPS

PAR38 RED

PAR38 GREEN

PAR38 BLUE

| Item No.                                 | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code    | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------------------------------------|---------------------|-----------|-----------|------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>SPECIALTY - COLOR PAR38 REFLECTOR</b> |                     |           |           |                  |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 33147                                    | 15                  | Med.      | 5,7       | 15PAR38/LED/FL/R | Box          | 100                    | —                 | Red    | —                          | —   | —                   | 25000            | 22.8           | \$1.81                    | 5.32" |
| 33149                                    | 15                  | Med.      | 5,7       | 15PAR38/LED/FL/G | Box          | 100                    | —                 | Green  | —                          | —   | —                   | 25000            | 22.8           | \$1.81                    | 5.32" |
| 33151                                    | 15                  | Med.      | 5,7       | 15PAR38/LED/FL/B | Box          | 100                    | —                 | Blue   | —                          | —   | —                   | 25000            | 22.8           | \$1.81                    | 5.32" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

## Footnotes

1 New Item  
2 Dimmable3 Low Voltage (12V)  
4 Approved for Damp Location5 Approved for Wet Location  
6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



BR30

## GROW LAMP

| Item No.            | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code       | Package Type | Equiv. Incand. Wattage | Color Designation | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------------|---------------------|-----------|-----------|---------------------|--------------|------------------------|-------------------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>BR Reflector</b> |                     |           |           |                     |              |                        |                   |                            |     |                     |                  |                |                           |       |
| 51820               | 9                   | Med.      | 4         | 9BR30/LED/FL/GROW/G | Box          | 65                     | —                 | —                          | —   | —                   | 25000            | 22.8           | \$1.08                    | 5.12" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

GENERAL PURPOSE  
SPECIALTY LAMPS

| Item No.             | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code           | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours              | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|----------------------|---------------------|-----------|-----------|-------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|-------------------------------|----------------|---------------------------|-------|
| C7                   |                     |           |           |                         |              |                        |                   |        |                            |     |                     |                               |                |                           |       |
| 55108                | 0.5                 | Cand.     | 4,7       | 0.5C7/LED/F/CB/27 2CD   | Card (2)     | 4                      | Warm White        | Frost  | 2700                       | 80  | 20                  | 15000                         | 13.6           | \$0.06                    | 2.00" |
| 55110                | 0.5                 | Cand.     | 4,7       | 0.5C7/LED/CL/CB/27 2CD  | Card (2)     | 4                      | Warm White        | Clear  | 2700                       | 80  | 20                  | 15000                         | 13.6           | \$0.06                    | 2.00" |
| 55109                | 0.75                | Cand.     | 4,7       | 0.75C7/LED/F/CB/27 2CD  | Card (2)     | 7                      | Warm White        | Frost  | 2700                       | 80  | 50                  | 15000                         | 13.6           | \$0.09                    | 2.00" |
| 55111                | 0.75                | Cand.     | 4,7       | 0.75C7/LED/CL/CB/27 2CD | Card (2)     | 7                      | Warm White        | Clear  | 2700                       | 80  | 50                  | 15000                         | 13.6           | \$0.09                    | 2.00" |
| S6                   |                     |           |           |                         |              |                        |                   |        |                            |     |                     |                               |                |                           |       |
| 45117                | 0.6                 | Cand.     | 4,7       | 0.6S6/LED/CL/CB/27 1CD  | Card         | 6                      | Warm White        | Clear  | 2700                       | 80  | 32                  | 15000                         | 13.6           | \$0.07                    | 1.77" |
| S11                  |                     |           |           |                         |              |                        |                   |        |                            |     |                     |                               |                |                           |       |
| 45113                | 1                   | Med.      | 4,7       | 1S11/LED/CL/27 1CD      | Card         | 7.5                    | Warm White        | Clear  | 2700                       | 80  | 50                  | 15000                         | 13.6           | \$0.12                    | 1.99" |
| 45112                | 1                   | Med.      | 4,7       | 1S11/LED/W/27 1CD       | Card         | 7.5                    | Warm White        | White  | 2700                       | 80  | 40                  | 15000                         | 13.6           | \$0.12                    | 2.08" |
| 45114                | 1.5                 | Inter.    | 4,7       | 1.5S11/LED/CL/IN/27 1CD | Card         | 10                     | Warm White        | Clear  | 2700                       | 80  | 80                  | 15000                         | 13.6           | \$0.18                    | 2.09" |
| S14                  |                     |           |           |                         |              |                        |                   |        |                            |     |                     |                               |                |                           |       |
| 55116                | 1.2                 | Med.      | 5,7       | 1.2S14/LED/CL/27 1CD    | Card         | 15                     | Warm White        | Clear  | 2700                       | 80  | 120                 | 15000                         | 13.6           | \$0.14                    | 3.23" |
| 55115                | 1.2                 | Med.      | 5,7       | 1.2S14/LED/F/27 1CD     | Card         | 15                     | Warm White        | Frost  | 2700                       | 80  | 120                 | 15000                         | 13.6           | \$0.14                    | 3.23" |
| T7                   |                     |           |           |                         |              |                        |                   |        |                            |     |                     |                               |                |                           |       |
| 45118                | 1                   | Cand.     | 4,7       | 1T7/LED/CL/CB/27 1CD    | Card         | 10                     | Warm White        | Clear  | 2700                       | 80  | 50                  | 15000                         | 13.6           | \$0.12                    | 2.09" |
| 45119                | 1.5                 | Inter.    | 4,7       | 1.5T7/LED/CL/IN/27 1CD  | Card         | 15                     | Warm White        | Clear  | 2700                       | 80  | 80                  | 15000                         | 13.6           | \$0.18                    | 2.09" |
| 45120                | 1.5                 | D.C. Bay. | 4,7       | 1.5T7/LED/CL/DC/27 1CD  | Card         | 15                     | Warm White        | Clear  | 2700                       | 80  | 80                  | 15000                         | 13.6           | \$0.18                    | 2.09" |
| 33199                | 8                   | Med.      | 4,7       | 8T7/LED/F/30 1CD        | Card         | 60                     | Warm White        | Frost  | 3000                       | 80  | 800                 | 15000                         | 13.6           | \$0.96                    | 4.22" |
| 05161                | 8                   | Med.      | 2,4,7     | 8T7/LED/DIM/F/30 1CD    | Card         | 60                     | Warm White        | Frost  | 3000                       | 80  | 800                 | 25000                         | 22.8           | \$0.96                    | 4.22" |
| UTILITY              |                     |           |           |                         |              |                        |                   |        |                            |     |                     |                               |                |                           |       |
| 03197                | 15                  | Med.      | 4,7       | 15DLR46E26/LED/F/27     | Box          | 75                     | Warm White        | Frost  | 2700                       | 80  | 1200                | 25000                         | 22.8           | \$1.81                    | 4.41" |
| 03198                | 20                  | Med.      | 4,7       | 20DLR64E26/LED/F/27     | Box          | 100                    | Warm White        | Frost  | 2700                       | 80  | 1800                | 25000                         | 22.8           | \$2.41                    | 6.06" |
| *Based on 3 hrs./day |                     |           |           |                         |              |                        |                   |        |                            |     |                     | **Based on 3 hrs./day 11¢/kWh |                |                           |       |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).


## Footnotes

1 New Item  
2 Dimmable3 Low Voltage (12V)  
4 Approved for Damp Location5 Approved for Wet Location  
6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



## HALOGEN ALTERNATIVE SPECIALTY LAMPS



| Item No.                 | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code      | Volt | Package Type | Equiv. Halogen Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|--------------------------|---------------------|-----------|-----------|--------------------|------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|
| <b>JC</b>                |                     |           |           |                    |      |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 43184                    | 1.5                 | G4        | 3,4,7     | 15G4/LED/F/30 1CD  | 12   | Card         | 10                     | Warm White        | Frost  | 3000                       | 80  | 150                 | 25000            | 22.8           | \$0.18                    | 1.46" |
| <b>JCD</b>               |                     |           |           |                    |      |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 33185                    | 2.5                 | G9        | 4,7       | 25G9/LED/CL/30 1CD | 120  | Card         | 25                     | Warm White        | Clear  | 3000                       | 80  | 240                 | 25000            | 22.8           | \$0.30                    | 2.05" |
| 51641                    | 5                   | G9        | 2,4,7     | 5G9/LED/DIM/CL/30  | 120  | Box          | 40                     | Warm White        | Clear  | 3000                       | 80  | 500                 | 25000            | 22.8           | \$0.60                    | 2.13" |
| <b>DOUBLE-ENDED LONG</b> |                     |           |           |                    |      |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 33187                    | 9                   | RSC       | 4,7       | 9R7S/LED/CL/27 1CD | 120  | Card         | 75                     | Warm White        | Clear  | 2700                       | 80  | 1000                | 25000            | 22.8           | \$1.08                    | 4.65" |
| <b>SINGLE-ENDED</b>      |                     |           |           |                    |      |              |                        |                   |        |                            |     |                     |                  |                |                           |       |
| 51631                    | 5                   | E11       | 2,4,7     | 5E11/LED/DIM/CL/30 | 120  | Box          | 50                     | Warm White        | Clear  | 3000                       | 80  | 500                 | 25000            | 22.8           | \$0.60                    | 2.24" |

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh



## PIN BASE LAMPS

Replacements for 13W, 18W, 32W, and 42W CFL pin-base lamps.



HORIZONTAL PL

VERTICAL PL

| Item No.                | Energy Used (Watts) | Lamp Base  | Footnotes | Domestic Code                        | Package Type | Equiv. CFL Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens)* | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-------------------------|---------------------|------------|-----------|--------------------------------------|--------------|--------------------|-------------------|--------|----------------------------|-----|----------------------|------------------|----------------|---------------------------|-------|
| HORIZONTAL INSTALLATION |                     |            |           |                                      |              |                    |                   |        |                            |     |                      |                  |                |                           |       |
| 51470                   | 9                   | G24Q GX24Q | 2,4,7     | 9PL/H/LED/DIM/G24Q/30 Direct Install | Box          | 26                 | Warm White        | White  | 3000                       | 82  | 900                  | 50000            | 45.6           | \$1.08                    | 5.20" |
| 51480                   | 9                   | G24Q GX24Q | 2,4,7     | 9PL/H/LED/DIM/G24Q/35 Direct Install | Box          | 26                 | Warm White        | White  | 3500                       | 82  | 950                  | 50000            | 45.6           | \$1.08                    | 5.20" |
| 51490                   | 9                   | G24Q GX24Q | 2,4,7     | 9PL/H/LED/DIM/G24Q/40 Direct Install | Box          | 26                 | Cool White        | White  | 4000                       | 82  | 1000                 | 50000            | 45.6           | \$1.08                    | 5.20" |
| VERTICAL INSTALLATION   |                     |            |           |                                      |              |                    |                   |        |                            |     |                      |                  |                |                           |       |
| 51500                   | 9                   | G24Q GX24Q | 2,4,7     | 9PL/V/LED/DIM/G24Q/30 Direct Install | Box          | 26                 | Warm White        | White  | 3000                       | 82  | 950                  | 50000            | 45.6           | \$1.08                    | 4.65" |
| 51510                   | 9                   | G24Q GX24Q | 2,4,7     | 9PL/V/LED/DIM/G24Q/35 Direct Install | Box          | 26                 | Warm White        | White  | 3500                       | 82  | 1000                 | 50000            | 45.6           | \$1.08                    | 4.65" |
| 51520                   | 9                   | G24Q GX24Q | 2,4,7     | 9PL/V/LED/DIM/G24Q/40 Direct Install | Box          | 26                 | Cool White        | White  | 4000                       | 82  | 1050                 | 50000            | 45.6           | \$1.08                    | 4.65" |

Dimmable when used with a compatible dimming ballast.

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

\* Lumen output is based on ballast type.



## TWIN TUBE LONG PIN BASE LAMP



TWIN TUBE LONG

| Item No.              | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                     | Package Type | Equiv. CFL Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | MOL    |
|-----------------------|---------------------|-----------|-----------|-----------------------------------|--------------|--------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|--------|
| <b>TWIN TUBE LONG</b> |                     |           |           |                                   |              |                    |                   |        |                            |     |                     |                  |        |
| 52220                 | 23                  | 2G11      | 4         | 23PL/H/LED/2G11/40 Ballast Bypass | Box          | 40                 | Cool White        | White  | 4000                       | 82  | 2800                | 50000            | 22.48" |

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

### Footnotes

- 1 New Item  
2 Dimmable

- 3 Low Voltage (12V)  
4 Approved for Damp Location

- 5 Approved for Wet Location  
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures





## RECESSED DOWNLIGHTS

All Recessed LED Downlight Kits are UL or ETL Classified.

| Item No.                                            | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code             | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | Brightness CRI | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL    | MOD         |
|-----------------------------------------------------|---------------------|-----------|-----------|---------------------------|--------------|------------------------|-------------------|--------|----------------------------|----------------|------------------|----------------|---------------------------|--------|-------------|
| <b>STEP BAFFLE WITH COLOR TEMPERATURE SELECTION</b> |                     |           |           |                           |              |                        |                   |        |                            |                |                  |                |                           |        |             |
| 24 51401                                            | 6.5                 | Med.      | 2,5       | 6.5R/4"/LED/DIM/FL/27-50  | Box          | 65                     | Multi 5           | White  | 2700/3000/3500/4000/5000   | 90             | 550              | 50000          | 45.6                      | 0.78   | 2.48" 5.27" |
| 24 51411                                            | 11                  | Med.      | 2,5       | 11R/5-6"/LED/DIM/FL/27-50 | Box          | 80                     | Multi 5           | White  | 2700/3000/3500/4000/5000   | 90             | 1000             | 50000          | 45.6                      | 1.32   | 2.87" 7.48" |
| <b>STEP BAFFLE</b>                                  |                     |           |           |                           |              |                        |                   |        |                            |                |                  |                |                           |        |             |
| 51047                                               | 10                  | Med.      | 2,5       | 10R/4"/LED/DIM/FL/30      | Box          | 65                     | Warm White        | Frost  | 3000                       | 90             | 670              | 50000          | 45.6                      | \$1.20 | 2.88" 5.52" |
| 51048                                               | 11                  | Med.      | 2,5       | 11R/5-6"/LED/DIM/FL/30    | Box          | 65                     | Warm White        | Frost  | 3000                       | 90             | 750              | 50000          | 45.6                      | \$1.32 | 2.13" 7.48" |
| 50550                                               | 11                  | Med.      | 2,5       | 11R/5-6"/LED/DIM/FL/40    | Box          | 65                     | Cool White        | Frost  | 4000                       | 90             | 750              | 50000          | 45.6                      | \$1.32 | 2.13" 7.48" |
| 50560                                               | 11                  | Med.      | 2,5       | 11R/5-6"/LED/DIM/FL/50    | Box          | 65                     | Daylight          | Frost  | 5000                       | 90             | 750              | 50000          | 45.6                      | \$1.32 | 2.13" 7.48" |
| <b>SMOOTH BAFFLE</b>                                |                     |           |           |                           |              |                        |                   |        |                            |                |                  |                |                           |        |             |
| 41043                                               | 8                   | Med.      | 2,4       | 8R/4"/LED/DIM/FL/27       | Box          | 65                     | Warm White        | Frost  | 2700                       | 80             | 650              | 50000          | 45.6                      | \$0.96 | 3.50" 5.04" |
| 41041                                               | 8                   | Med.      | 2,4       | 8R/4"/LED/DIM/FL/30       | Box          | 65                     | Warm White        | Frost  | 3000                       | 80             | 650              | 50000          | 45.6                      | \$0.96 | 3.50" 5.04" |
| 41040                                               | 14                  | Med.      | 2,4       | 14R/5"/LED/DIM/FL/27      | Box          | 80                     | Warm White        | Frost  | 2700                       | 80             | 1000             | 50000          | 45.6                      | \$1.69 | 3.54" 6.30" |
| 41044                                               | 14                  | Med.      | 2,4       | 14R/5"/LED/DIM/FL/30      | Box          | 80                     | Warm White        | Frost  | 3000                       | 80             | 1000             | 50000          | 45.6                      | \$1.69 | 3.54" 6.30" |
| 41045                                               | 14                  | Med.      | 2,4       | 14R/6"/LED/DIM/FL/27      | Box          | 80                     | Warm White        | Frost  | 2700                       | 80             | 1000             | 50000          | 45.6                      | \$1.69 | 3.40" 7.24" |
| 41046                                               | 14                  | Med.      | 2,4       | 14R/6"/LED/DIM/FL/30      | Box          | 80                     | Warm White        | Frost  | 3000                       | 80             | 1000             | 50000          | 45.6                      | \$1.69 | 3.40" 7.24" |
| <b>SQUARE STEP BAFFLE</b>                           |                     |           |           |                           |              |                        |                   |        |                            |                |                  |                |                           |        |             |
| 31053                                               | 10                  | Med.      | 2,5       | 10R/4"/LED/DIM/SQ/FL/30   | Box          | 60                     | Warm White        | Frost  | 3000                       | 90             | 650              | 50000          | 45.6                      | \$1.20 | 2.06" 5.13" |
| 31055                                               | 15                  | Med.      | 2,5       | 15R/6"/LED/DIM/SQ/FL/30   | Box          | 100                    | Warm White        | Frost  | 3000                       | 90             | 1100             | 50000          | 45.6                      | \$1.81 | 3.00" 7.50" |
| 31056                                               | 15                  | Med.      | 2,5       | 15R/6"/LED/DIM/SQ/FL/40   | Box          | 100                    | Cool White        | Frost  | 4000                       | 90             | 1100             | 50000          | 45.6                      | \$1.81 | 3.00" 7.50" |
| <b>SLOPED STEP BAFFLE</b>                           |                     |           |           |                           |              |                        |                   |        |                            |                |                  |                |                           |        |             |
| 50820                                               | 10                  | Med.      | 2,4       | 10R/4"/LED/DIM/SLP/FL/27  | Box          | 65                     | Warm White        | Frost  | 2700                       | 90             | 650              | 35000          | 31.9                      | \$1.20 | 3.35" 5.15" |
| 50830                                               | 10                  | Med.      | 2,4       | 10R/4"/LED/DIM/SLP/FL/30  | Box          | 65                     | Warm White        | Frost  | 3000                       | 90             | 650              | 35000          | 31.9                      | \$1.20 | 3.35" 5.15" |
| 50840                                               | 13                  | Med.      | 2,4       | 13R/6"/LED/DIM/SLP/FL/27  | Box          | 80                     | Warm White        | Frost  | 2700                       | 90             | 900              | 35000          | 31.9                      | \$1.57 | 3.50" 7.28" |
| 50850                                               | 13                  | Med.      | 2,4       | 13R/6"/LED/DIM/SLP/FL/30  | Box          | 80                     | Warm White        | Frost  | 3000                       | 90             | 900              | 35000          | 31.9                      | \$1.57 | 3.50" 7.28" |

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

### Footnotes

1 New Item  
2 Dimmable

3 Low Voltage (12V)  
4 Approved for Damp Location

5 Approved for Wet Location  
6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



## SLIM RECESSED DOWNLIGHTS

All Slim Direct Wire Recessed LED Downlights are ETL Listed.

| Item No.                                                       | Energy Used (Watts) | Footnotes | Domestic Code                         | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   | MOD   |
|----------------------------------------------------------------|---------------------|-----------|---------------------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|-------|
| <b>ROUND SLIM STEP BAFFLE WITH COLOR TEMPERATURE SELECTION</b> |                     |           |                                       |              |                        |                   |        |                            |     |                     |                  |                |                           |       |       |
| 52260 ★❖                                                       | 10                  | 1,2,5     | 10R/4"/LED/DIM/SLIMBAFFLE/FL/27-50    | Box          | 65                     | Multi 5           | White  | 2700/3000/3500/4000/5000   | 90  | 650                 | 50000            | 45.6           | \$1.20                    | 1.42" | 5.04" |
| 52270 ❖❖                                                       | 12                  | 1,2,5     | 12R/6"/LED/DIM/SLIMBAFFLE/FL/27-50    | Box          | 80                     | Multi 5           | White  | 2700/3000/3500/4000/5000   | 90  | 900                 | 50000            | 45.6           | \$1.45                    | 1.42" | 7.17" |
| <b>ROUND SLIM WITH COLOR TEMPERATURE SELECTION</b>             |                     |           |                                       |              |                        |                   |        |                            |     |                     |                  |                |                           |       |       |
| 52011 ★❖                                                       | 10                  | 2,5       | 10R/4"/LED/DIM/SLIM/FL/27-50          | Box          | 65                     | Multi 5           | White  | 2700/3000/3500/4000/5000   | 80  | 650                 | 50000            | 45.6           | \$1.20                    | 1.02" | 5.04" |
| 52050 ▲❖                                                       | 11                  | 1,2,5     | 11R/5"/LED/DIM/SLIM/FL/27-50          | Box          | 75                     | Multi 5           | White  | 2700/3000/3500/4000/5000   | 80  | 800                 | 50000            | 45.6           | \$1.32                    | 1.02" | 6.29" |
| 52021 ❖❖                                                       | 12                  | 2,5       | 12R/6"/LED/DIM/SLIM/FL/27-50          | Box          | 80                     | Multi 5           | White  | 2700/3000/3500/4000/5000   | 80  | 950                 | 50000            | 45.6           | \$1.45                    | 1.02" | 7.17" |
| <b>ROUND SLIM</b>                                              |                     |           |                                       |              |                        |                   |        |                            |     |                     |                  |                |                           |       |       |
| 52160 ●                                                        | 7                   | 2,4       | 7R/3"/LED/DIM/WH/SLIM/FL/27           | Box          | 40                     | Warm White        | White  | 2700                       | 80  | 450                 | 50000            | 45.6           | \$0.84                    | 0.98" | 3.35" |
| 52180 ●                                                        | 7                   | 2,4       | 7R/3"/LED/DIM/WH/SLIM/FL/40           | Box          | 40                     | Cool White        | White  | 4000                       | 80  | 450                 | 50000            | 45.6           | \$0.84                    | 0.98" | 3.35" |
| 52190 ●                                                        | 7                   | 2,4       | 7R/3"/LED/DIM/WH/SLIM/FL/50           | Box          | 40                     | Daylight          | White  | 5000                       | 80  | 450                 | 50000            | 45.6           | \$0.84                    | 0.98" | 3.35" |
| 52171 ❖❖                                                       | 8                   | 2,5       | 8R/3"/LED/DIM/WH/SLIM/FL/30           | Box          | 40                     | Warm White        | White  | 3000                       | 90  | 500                 | 50000            | 45.6           | \$0.96                    | 1.02" | 3.78" |
| 50951 ★❖❖                                                      | 10                  | 2,5       | 10R/4"/LED/DIM/WH/SLIM/FL/27          | Box          | 65                     | Warm White        | White  | 2700                       | 90  | 650                 | 50000            | 45.6           | \$1.20                    | 1.02" | 5.04" |
| 50971 ★❖❖                                                      | 10                  | 2,5       | 10R/4"/LED/DIM/WH/SLIM/FL/30          | Box          | 65                     | Warm White        | White  | 3000                       | 90  | 650                 | 50000            | 45.6           | \$1.20                    | 1.02" | 5.04" |
| 51030 ❖●                                                       | 12                  | 2,4       | 12R/6"/LED/DIM/WH/SLIM/FL/27          | Box          | 60                     | Warm White        | White  | 2700                       | 90  | 900                 | 50000            | 45.6           | \$1.45                    | 0.98" | 6.72" |
| 51071 ❖❖❖                                                      | 12                  | 2,5       | 12R/6"/LED/DIM/WH/SLIM/FL/30          | Box          | 80                     | Warm White        | White  | 3000                       | 90  | 900                 | 50000            | 45.6           | \$1.45                    | 1.02" | 7.17" |
| 51091 ❖❖❖                                                      | 12                  | 2,5       | 12R/6"/LED/DIM/WH/SLIM/FL/40          | Box          | 80                     | Cool White        | White  | 4000                       | 90  | 900                 | 50000            | 45.6           | \$1.45                    | 1.02" | 7.17" |
| 51111 ❖❖❖                                                      | 12                  | 2,5       | 12R/6"/LED/DIM/WH/SLIM/FL/50          | Box          | 80                     | Daylight          | White  | 5000                       | 90  | 900                 | 50000            | 45.6           | \$1.45                    | 1.02" | 7.17" |
| 51980 ●                                                        | 18                  | 2,4       | 18R/8"/LED/DIM/WH/SLIM/FL/120-277V/30 | Box          | 100                    | Warm White        | White  | 3000                       | 90  | 1300                | 50000            | 45.6           | \$2.17                    | 0.98" | 8.86" |
| 51990 ●                                                        | 18                  | 2,4       | 18R/8"/LED/DIM/WH/SLIM/FL/120-277V/40 | Box          | 100                    | Cool White        | White  | 4000                       | 90  | 1300                | 50000            | 45.6           | \$2.17                    | 0.98" | 8.86" |
| 52000 ●                                                        | 18                  | 2,4       | 18R/8"/LED/DIM/WH/SLIM/FL/120-277V/50 | Box          | 100                    | Daylight          | White  | 5000                       | 90  | 1300                | 50000            | 45.6           | \$2.17                    | 0.98" | 8.86" |

★ Compatible with item #509506913

▲ Compatible with item #520506913

❖ Compatible with item #510306913

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

● Compatible with item #509506931

❖ IP40 Rated

❖ Compatible with Special Order accessory item #509516931

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

## SLIM RECESSED DOWNLIGHT ACCESSORIES



| Item No.    | Footnotes | Description                                        | Height | Width  | Depth |
|-------------|-----------|----------------------------------------------------|--------|--------|-------|
| 509506931   |           | 10 ft. Extension Cord for Slim Recessed Downlights | —      | —      | —     |
| 509516931 * |           | 10 ft. Extension Cord for Slim Recessed Downlights | —      | —      | —     |
| 509506913   |           | Bracket for 4 in. Slim Recessed Downlights         | 0.03"  | 26.00" | 6.25" |
| 520506913   |           | Bracket for 5 in. Slim Recessed Downlights         | 0.03"  | 26.00" | 8.35" |
| 510306913   |           | Bracket for 6 in. Slim Recessed Downlights         | 0.03"  | 26.00" | 8.38" |

\* SPECIAL ORDER ITEM - CALL YOUR WESTINGHOUSE LIGHTING REPRESENTATIVE FOR ADDITIONAL INFORMATION

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

### Footnotes

1 New Item  
2 Dimmable

3 Low Voltage (12V)  
4 Approved for Damp Location

5 Approved for Wet Location  
6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



## GIMBAL RECESSED DOWNLIGHTS

All Gimbal Recessed LED Downlights are ETL Listed.



| Item No.                          | Energy Used (Watts) | Footnotes | Domestic Code               | Package Type | Equiv. Incand. Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   | MOD   |
|-----------------------------------|---------------------|-----------|-----------------------------|--------------|------------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|----------------|---------------------------|-------|-------|
| <b>GIMBAL RECESSED DOWNLIGHTS</b> |                     |           |                             |              |                        |                   |        |                            |     |                     |                  |                |                           |       |       |
| 52120                             | 7                   | 2,4       | 7R/3"/LED/DIM/WH/GIMBAL/27  | Box          | 65                     | Warm White        | White  | 2700                       | 80  | 610                 | 50000            | 45.6           | \$0.84                    | 1.83" | 3.37" |
| 52130                             | 7                   | 2,4       | 7R/3"/LED/DIM/WH/GIMBAL/30  | Box          | 65                     | Warm White        | White  | 3000                       | 80  | 610                 | 50000            | 45.6           | \$0.84                    | 1.83" | 3.37" |
| 52140 +                           | 12                  | 2,4       | 12R/4"/LED/DIM/WH/GIMBAL/27 | Box          | 80                     | Warm White        | White  | 2700                       | 90  | 850                 | 50000            | 45.6           | \$1.45                    | 2.24" | 5.04" |
| 52150 +                           | 12                  | 2,4       | 12R/4"/LED/DIM/WH/GIMBAL/30 | Box          | 80                     | Warm White        | White  | 3000                       | 90  | 850                 | 50000            | 45.6           | \$1.45                    | 2.24" | 5.04" |

+ Compatible with Bracket for 4 in. Slim Recessed Downlights sold separately (Item# 509506913)

\*Based on 3 hrs./day

\*\*Based on 3 hrs./day 11¢/kWh

All gimbal recessed downlights are compatible with 10 ft. Extension Cord for Slim Recessed Downlights sold separately (Item# 509506931)

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.



## UNIVERSAL HIGH LUMEN LAMP

This LED Lamp is 120-277V.



52230

| Item No.                    | Energy Used (Watts) | Lamp Base      | Footnotes | Domestic Code     | Package Type | Equiv. HID Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | MOL    |
|-----------------------------|---------------------|----------------|-----------|-------------------|--------------|--------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|--------|
| <b>UNIVERSAL HIGH LUMEN</b> |                     |                |           |                   |              |                    |                   |        |                            |     |                     |                  |        |
| 52230                       | 70                  | Extended Mogul | 1,4,7     | 70UHL/LED/EX39/50 | Box          | 250                | Daylight          | White  | 5000                       | 80  | 10500               | 50000            | 11.57" |

See product specification sheet for minimum compartment dimensions.

## UNIVERSAL HIGH LUMEN LAMP ACCESSORIES



522306914



522306916



522306917



522306930

| Item No.    | Footnotes | Description                                                             | Height | Width/ Depth | Length |
|-------------|-----------|-------------------------------------------------------------------------|--------|--------------|--------|
| 522306914 * |           | Microwave Motion Sensor for Universal High Lumen LED 52230 White Finish | 1.69"  | 2.06"        | —      |
| 522306916 * |           | Infrared Motion Sensor for Universal High Lumen LED 52230 White Finish  | 1.69"  | 2.06"        | —      |
| 522306917 * |           | Photocell Sensor for Universal High Lumen LED 52230 White Finish        | 1.69"  | 2.06"        | —      |
| 522306930 * |           | Remote Accessory Cable for Universal High Lumen LED 52230 White Finish  | —      | —            | 47.24" |

\* SPECIAL ORDER ITEM  
CALL YOUR WESTINGHOUSE LIGHTING REPRESENTATIVE FOR ADDITIONAL INFORMATION

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

### Footnotes

- |            |                              |                             |                                                 |
|------------|------------------------------|-----------------------------|-------------------------------------------------|
| 1 New Item | 3 Low Voltage (12V)          | 5 Approved for Wet Location | 7 Approved for Use in Totally Enclosed Fixtures |
| 2 Dimmable | 4 Approved for Damp Location | 6 Indoor Application Only   |                                                 |

[www.westinghouselighting.com](http://www.westinghouselighting.com)



## LOW BAY & HIGH BAY LAMPS

These LED Lamps are 120-277V.

| Item No.                | Energy Used (Watts) | Lamp Base      | Footnotes | Domestic Code        | Package Type | Equiv. HID Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | MOL    |
|-------------------------|---------------------|----------------|-----------|----------------------|--------------|--------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|--------|
| <b>LOW AND HIGH BAY</b> |                     |                |           |                      |              |                    |                   |        |                            |     |                     |                  |        |
| <b>51720</b> ♦          | 80                  | Extended Mogul | 4,7       | 80LB/LED/HL/EX39/50  | Box          | 250                | Daylight          | White  | 5000                       | 80  | 9700                | 50000            | 10.12" |
| <b>50570</b>            | 115                 | Mogul          | 4,7       | 115HB/LED/HL/E39/50  | Box          | 400                | Daylight          | Clear  | 5000                       | 80  | 15500               | 50000            | 8.11"  |
| <b>51730</b>            | 130                 | Extended Mogul | 4,7       | 130HB/LED/HL/EX39/50 | Box          | 400                | Daylight          | White  | 5000                       | 80  | 16100               | 50000            | 12.40" |

♦ DLC qualified



## HIGH LUMEN LAMPS

All High Lumen LED Lamps are 120-277V.



| Item No.          | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code        | Package Type | Equiv. Incand. Wattage | Equiv. CFL Wattage | Equiv. HID Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | MOL    |
|-------------------|---------------------|-----------|-----------|----------------------|--------------|------------------------|--------------------|--------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|--------|
| <b>HIGH LUMEN</b> |                     |           |           |                      |              |                        |                    |                    |                   |        |                            |     |                     |                  |        |
| <b>35181</b>      | 16                  | Med.      | 4,7       | 16T19/LED/HL/50      | Box          | 125                    | 32                 | 70                 | Daylight          | Clear  | 5000                       | 80  | 2400                | 50000            | 6.57"  |
| <b>35165</b>      | 22                  | Med.      | 4,7       | 22T19/LED/HL/50      | Box          | 150                    | 55                 | 100                | Daylight          | Clear  | 5000                       | 80  | 2860                | 50000            | 7.09"  |
| <b>35162</b>      | 36                  | Med.      | 4,7       | 36T30/LED/HL/50      | Box          | 200                    | 65                 | 150                | Daylight          | Clear  | 5000                       | 80  | 4680                | 50000            | 8.27"  |
| <b>35163</b>      | 45                  | Med.      | 4,7       | 45T30/LED/HL/50      | Box          | 300                    | 85                 | 175                | Daylight          | Clear  | 5000                       | 80  | 5850                | 50000            | 9.25"  |
| <b>35164</b> ♦    | 45                  | Mogul     | 4,7       | 45T30/LED/HL/E39/50  | Box          | 300                    | 85                 | 175                | Daylight          | Clear  | 5000                       | 80  | 5850                | 50000            | 9.25"  |
| <b>35166</b> ♦    | 54                  | Mogul     | 4,7       | 54T30/LED/HL/E39/50  | Box          | 400                    | 105                | 250                | Daylight          | Clear  | 5000                       | 80  | 7020                | 50000            | 10.24" |
| <b>51540</b> ♦    | 65                  | Mogul     | 4,7       | 65T30/LED/HL/E39/50  | Box          | 450                    | 125                | 320                | Daylight          | Clear  | 5000                       | 80  | 8450                | 50000            | 12.20" |
| <b>45167</b> ♦    | 100                 | Mogul     | 4,7       | 100T38/LED/HL/E39/50 | Box          | 750                    | 150                | 400                | Daylight          | Clear  | 5000                       | 80  | 15000               | 50000            | 11.10" |
| <b>35180</b> ♦    | 120                 | Mogul     | 4,7       | 120T38/LED/HL/E39/50 | Box          | 1000                   | 250                | 800                | Daylight          | Clear  | 5000                       | 80  | 18000               | 50000            | 13.46" |

♦ DLC qualified

See product specification sheet for minimum compartment dimensions.

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

### Footnotes

- 1 New Item  
2 Dimmable

- 3 Low Voltage (12V)  
4 Approved for Damp Location

- 5 Approved for Wet Location  
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures



## FILAMENT HIGH LUMEN

This LED Lamp is 120-277V.



52250

| Item No.             | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                         | Package Type | Equiv. HID Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | MOL   |
|----------------------|---------------------|-----------|-----------|---------------------------------------|--------------|--------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|-------|
| <b>ED28 FILAMENT</b> |                     |           |           |                                       |              |                    |                   |        |                            |     |                     |                  |       |
| 52250                | 32                  | Mogul     | 5,7       | 32ED28/FilamentLED/CL/120-277V/E39/50 | Box          | 175                | Daylight          | Clear  | 5000                       | 80  | 5000                | 15000            | 8.86" |

## SHOEBOX LAMPS

All Shoebox LED Lamps are 100-277V.



51190



51181

| Item No.             | Energy Used (Watts) | Lamp Base            | Footnotes | Domestic Code     | Package Type | Equiv. HID Wattage | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | MOL    |
|----------------------|---------------------|----------------------|-----------|-------------------|--------------|--------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|--------|
| <b>SHOEBOX LAMPS</b> |                     |                      |           |                   |              |                    |                   |        |                            |     |                     |                  |        |
| 51190                | 80                  | Mogul/Extended Mogul | 4,7       | 80SB/LED/EX39/50  | Box          | 250                | Daylight          | Clear  | 5000                       | 80  | 9200                | 50000            | 8.70"  |
| 51181 ♦              | 110                 | Mogul/Extended Mogul | 4,7       | 110SB/LED/EX39/50 | Box          | 400                | Daylight          | Clear  | 5000                       | 80  | 15800               | 50000            | 11.06" |

♦ DLC qualified

See product specification sheet for minimum compartment dimensions.



## U-BENT LINEAR LAMPS

All Linear LED Lamps are UL Classified and NSF Certified.



T8 U-BENT

| Item No.                                                      | Energy Used (Watts) | Lamp Base  | Footnotes | Domestic Code                  | Package Type | Lamp Type Replacement | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | MOL    |
|---------------------------------------------------------------|---------------------|------------|-----------|--------------------------------|--------------|-----------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|--------|
| <b>T8 U-Bent (DesignLights Consortium® qualified product)</b> |                     |            |           |                                |              |                       |                   |        |                            |     |                     |                  |        |
| 50300                                                         | 18                  | Med. BiPin | 4,7       | LED 18T8/UB6/40 Ballast Bypass | Box          | T8 & T12 U            | Cool White        | Frost  | 4000                       | 82  | 2200                | 50000            | 22.84" |
| 50380                                                         | 18                  | Med. BiPin | 4,7       | LED 18T8/UB6/50 Ballast Bypass | Box          | T8 & T12 U            | Daylight          | Frost  | 5000                       | 82  | 2200                | 50000            | 22.84" |

Ballast Bypass lamps are designed to operate on voltages ranging from 120-277V.

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).


### Footnotes

- |            |                              |                             |                                                 |
|------------|------------------------------|-----------------------------|-------------------------------------------------|
| 1 New Item | 3 Low Voltage (12V)          | 5 Approved for Wet Location | 7 Approved for Use in Totally Enclosed Fixtures |
| 2 Dimmable | 4 Approved for Damp Location | 6 Indoor Application Only   |                                                 |



## LINEAR LAMPS

All Linear LED Lamps are  
UL Classified and NSF Certified.

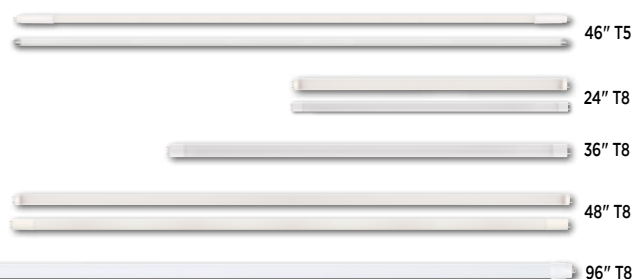

| Item No.                                                                                         | Energy Used (Watts) | Lamp Base  | Footnotes | Domestic Code                        | Package Type | Lamp Type Replacement | Color Designation | Finish | Color Temperature (Kelvin) | CRI | Brightness (Lumens) | Avg. Rated Hours | MOL |
|--------------------------------------------------------------------------------------------------|---------------------|------------|-----------|--------------------------------------|--------------|-----------------------|-------------------|--------|----------------------------|-----|---------------------|------------------|-----|
| <b>T5 46 inch (DesignLights Consortium® qualified product)</b>                                   |                     |            |           |                                      |              |                       |                   |        |                            |     |                     |                  |     |
| 50801 ♦■                                                                                         | 24                  | Mini BiPin | 4,7       | LED 24T5/46"/40 Ballast Bypass       | Sleeve       | T5                    | Cool White        | White  | 4000                       | 80  | 3500                | 50000            | 46" |
| 51531 ♦■                                                                                         | 24                  | Mini BiPin | 4,7       | LED 24T5/46"/50 DE Ballast Bypass    | Sleeve       | T5                    | Daylight          | White  | 5000                       | 80  | 3500                | 50000            | 46" |
| 43788 ♦■                                                                                         | 25                  | Mini BiPin | 4         | LED 25T5/46"/40 Direct Install       | Sleeve       | T5                    | Cool White        | Frost  | 4000                       | 82  | 3500                | 50000            | 46" |
| 43789 ♦■                                                                                         | 25                  | Mini BiPin | 4         | LED 25T5/46"/50 Direct Install       | Sleeve       | T5                    | Daylight          | Frost  | 5000                       | 82  | 3500                | 50000            | 46" |
| <b>T8 24 inch (DesignLights Consortium® qualified product)</b>                                   |                     |            |           |                                      |              |                       |                   |        |                            |     |                     |                  |     |
| 50251 ♦                                                                                          | 8                   | Med. BiPin | 4,7       | LED 8T8/24"/DIM/40 Direct Install    | Sleeve       | T8                    | Cool White        | Frost  | 4000                       | 82  | 1250                | 50000            | 24" |
| 50260 ♦                                                                                          | 9                   | Med. BiPin | 4,7       | LED 9T8/24"/40 Ballast Bypass        | Sleeve       | T8 & T12              | Cool White        | Frost  | 4000                       | 82  | 1150                | 50000            | 24" |
| 50440 ♦                                                                                          | 9                   | Med. BiPin | 4,7       | LED 9T8/24"/50 Ballast Bypass        | Sleeve       | T8 & T12              | Daylight          | Frost  | 5000                       | 82  | 1150                | 50000            | 24" |
| <b>T8 36 inch</b>                                                                                |                     |            |           |                                      |              |                       |                   |        |                            |     |                     |                  |     |
| 50280 ♦                                                                                          | 12                  | Med. BiPin | 4,7       | LED 12T8/36"/40 Ballast Bypass       | Sleeve       | T8 & T12              | Cool White        | Frost  | 4000                       | 82  | 1450                | 50000            | 36" |
| <b>T8 48 inch (DesignLights Consortium® qualified product)</b>                                   |                     |            |           |                                      |              |                       |                   |        |                            |     |                     |                  |     |
| 53739 ♦▶                                                                                         | 11                  | Med. BiPin | 4,7       | LED 11T8/48"/DIM/40 Direct Install   | Sleeve       | T8                    | Cool White        | Frost  | 4000                       | 82  | 1800                | 50000            | 48" |
| 53852 ♦▶                                                                                         | 11                  | Med. BiPin | 4,7       | LED 11T8/48"/DIM/50 Direct Install   | Sleeve       | T8                    | Daylight          | Frost  | 5000                       | 82  | 1800                | 50000            | 48" |
| 52310 ♦▶                                                                                         | 14                  | Med. BiPin | 4,7       | LED 14T8/48"/DIM/35 Direct Install   | Sleeve       | T8                    | Cool White        | Frost  | 3500                       | 82  | 2200                | 50000            | 48" |
| 52320 ♦▶                                                                                         | 14                  | Med. BiPin | 4,7       | LED 14T8/48"/DIM/40 Direct Install   | Sleeve       | T8                    | Cool White        | Frost  | 4000                       | 82  | 2200                | 50000            | 48" |
| 52330 ♦▶                                                                                         | 14                  | Med. BiPin | 4,7       | LED 14T8/48"/DIM/50 Direct Install   | Sleeve       | T8                    | Daylight          | Frost  | 5000                       | 82  | 2200                | 50000            | 48" |
| <b>T8 48 inch Single-Ended/Double-Ended Powered (DesignLights Consortium® qualified product)</b> |                     |            |           |                                      |              |                       |                   |        |                            |     |                     |                  |     |
| 51551 ♦                                                                                          | 14                  | Med. BiPin | 4,7       | LED 14T8/48"/35 SE/DE Ballast Bypass | Sleeve       | T8 & T12              | Cool White        | Frost  | 3500                       | 83  | 1700                | 50000            | 48" |
| 51561 ♦                                                                                          | 14                  | Med. BiPin | 4,7       | LED 14T8/48"/40 SE/DE Ballast Bypass | Sleeve       | T8 & T12              | Cool White        | Frost  | 4000                       | 83  | 1800                | 50000            | 48" |
| 51571 ♦                                                                                          | 14                  | Med. BiPin | 4,7       | LED 14T8/48"/50 SE/DE Ballast Bypass | Sleeve       | T8 & T12              | Daylight          | Frost  | 5000                       | 83  | 1800                | 50000            | 48" |
| 51421 ♦                                                                                          | 17                  | Med. BiPin | 4,7       | LED 17T8/48"/35 SE/DE Ballast Bypass | Sleeve       | T8 & T12              | Cool White        | Frost  | 3500                       | 83  | 2100                | 50000            | 48" |
| 51431 ♦                                                                                          | 17                  | Med. BiPin | 4,7       | LED 17T8/48"/40 SE/DE Ballast Bypass | Sleeve       | T8 & T12              | Cool White        | Frost  | 4000                       | 83  | 2200                | 50000            | 48" |
| 51441 ♦                                                                                          | 17                  | Med. BiPin | 4,7       | LED 17T8/48"/50 SE/DE Ballast Bypass | Sleeve       | T8 & T12              | Daylight          | Frost  | 5000                       | 83  | 2200                | 50000            | 48" |
| <b>T8 96 inch (DesignLights Consortium® qualified product)</b>                                   |                     |            |           |                                      |              |                       |                   |        |                            |     |                     |                  |     |
| 04051 ♦                                                                                          | 43                  | Single Pin | 4,7       | LED 43T8/96"/40 Ballast Bypass       | Bulk         | T8 & T12              | Cool White        | Frost  | 4000                       | 82  | 5500                | 50000            | 96" |
| 04052 ♦                                                                                          | 43                  | Single Pin | 4,7       | LED 43T8/96"/50 Ballast Bypass       | Bulk         | T8 & T12              | Daylight          | Frost  | 5000                       | 82  | 5500                | 50000            | 96" |

♦ DLC qualified

▶ Dimmable when used with a compatible dimming ballast.

■ Replace F54T5HO linear fluorescent lamps.

Ballast Bypass lamps are designed to operate on voltages ranging from 120-277V.

See individual product specification sheets for dimmer and ballast compatibility on [www.westinghouselighting.com](http://www.westinghouselighting.com).

## Footnotes

- 1 New Item  
2 Dimmable

- 3 Low Voltage (12V)  
4 Approved for Damp Location

- 5 Approved for Wet Location  
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures



# ECO-HALOGEN & SPECIALTY HALOGEN LIGHTING

Providing bright, white light and long life, our halogen lamps come in a variety of sizes and shapes. These lamps are completely dimmable and can be used anywhere, making them an excellent choice for a variety of lighting solutions.



MR11 GU4 BASE

## MR11 LAMPS, DICHROIC (LOW VOLTAGE)

| Item No.       | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code     | Package Type | Candle Power | Beam Spread | Beam Type    | Filament Type | Color Temperature (Kelvin) | Avg. Rated Hours | ANSI Code | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|----------------|---------------------|-----------|-----------|-------------------|--------------|--------------|-------------|--------------|---------------|----------------------------|------------------|-----------|----------------|---------------------------|-------|
| <b>6 VOLT</b>  |                     |           |           |                   |              |              |             |              |               |                            |                  |           |                |                           |       |
| 04771          | 5                   | GU4       | 1         | 5MR11Q/NFL/LN     | Card         | 200          | 16°         | Narrow Flood | C8            | 2900                       | 2000             | -         | 1.8            | \$0.60                    | 1.38" |
| <b>12 VOLT</b> |                     |           |           |                   |              |              |             |              |               |                            |                  |           |                |                           |       |
| 04766          | 5                   | GU4       | 1         | 5MR11Q/NFL/LN     | Card         | 200          | 16°         | Narrow Flood | C8            | 2900                       | 2000             | -         | 1.8            | \$0.60                    | 1.38" |
| 04761          | 10                  | GU4       | 1         | 10MR11Q/NFL/LN    | Card         | 650          | 16°         | Narrow Flood | C6            | 2900                       | 2000             | -         | 1.8            | \$1.20                    | 1.38" |
| 04750          | 20                  | GU4       | 1         | 20MR11Q/NFL/LN    | Card         | 1600         | 16°         | Narrow Flood | CC6           | 2950                       | 2000             | FTC       | 1.8            | \$2.41                    | 1.38" |
| 06214          | 20                  | GU4       | 1,5       | 20MR11X/FL/LN 2CD | Card (2)     | 700          | 30°         | Flood        | C8            | 2900                       | 10000            | FTD       | 9.1            | \$2.41                    | 1.38" |
| 04748          | 20                  | GU4       | 1         | 20MR11Q/SP/LN     | Card         | 700          | 12°         | Spot         | C8            | 2800                       | 2000             | FTB       | 1.8            | \$2.41                    | 1.38" |
| 04765          | 35                  | GU4       | 1         | 35MR11Q/NFL/LN    | Card         | 2800         | 16°         | Narrow Flood | C6            | 3000                       | 2000             | FTF       | 1.8            | \$4.22                    | 1.38" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh



MR16 GU5.3 BASE



MR16 CLEAR LENS GU5.3 BASE

## MR16 LAMPS, 12 VOLT DICHROIC (LOW VOLTAGE)

| Item No.            | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code     | Package Type | Candle Power | Beam Spread | Beam Type    | Filament Type | Color Temperature (Kelvin) | Avg. Rated Hours | ANSI Code | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------------|---------------------|-----------|-----------|-------------------|--------------|--------------|-------------|--------------|---------------|----------------------------|------------------|-----------|----------------|---------------------------|-------|
| <b>MR16 12 VOLT</b> |                     |           |           |                   |              |              |             |              |               |                            |                  |           |                |                           |       |
| 04781               | 20                  | GU5.3     | 1         | 20MR16Q/FL/LN     | Card         | 600          | 32°         | Flood        | C8            | 2950                       | 2000             | BAB       | 1.8            | \$2.41                    | 1.81" |
| 06212               | 20                  | GU5.3     | 1,5       | 20MR16X/FL/LN 2CD | Card (2)     | 700          | 32°         | Flood        | C8            | 2950                       | 10000            | BAB       | 9.1            | \$2.41                    | 1.81" |
| 04749               | 20                  | GU5.3     | 1         | 20MR16Q/SP/LN     | Card         | 3500         | 12°         | Spot         | C8            | 2950                       | 2000             | ESX       | 1.8            | \$2.41                    | 1.81" |
| 04563               | 35                  | GU5.3     | 1         | 35MR16Q/FL/LN     | Card         | 1250         | 32°         | Flood        | C8            | 3000                       | 2000             | FMW       | 1.8            | \$4.22                    | 1.81" |
| 04456               | 50                  | GU5.3     |           | 50MR16Q/FL        | Box          | 1500         | 38°         | Flood        | C8            | 3050                       | 2000             | EXN       | 1.8            | \$6.02                    | 1.81" |
| 04586               | 50                  | GU5.3     |           | 50MR16Q/FL        | Box          | 2000         | 38°         | Flood        | C8            | 3000                       | 5000             | EXN       | 4.5            | \$6.02                    | 1.81" |
| 04755               | 50                  | GU5.3     | 1         | 50MR16Q/NFL/LN    | Card         | 4300         | 18°         | Narrow Flood | C6            | 3050                       | 2000             | EXZ       | 1.8            | \$6.02                    | 1.81" |
| 04756               | 50                  | GU5.3     | 1         | 50MR16Q/FL/LN     | Card         | 1650         | 32°         | Flood        | C8            | 3050                       | 2000             | EXN       | 1.8            | \$6.02                    | 1.81" |
| 06213               | 50                  | GU5.3     | 1,5       | 50MR16X/FL/LN 2CD | Card (2)     | 1500         | 32°         | Flood        | C8            | 3050                       | 10000            | EXN       | 9.1            | \$6.02                    | 1.81" |
| 04559               | 50                  | GU5.3     | 1         | 50MR16Q/SP/LN     | Card         | 10000        | 12°         | Spot         | C8            | 3050                       | 2000             | EXT       | 1.8            | \$6.02                    | 1.81" |
| 04758               | 75                  | GU5.3     | 1         | 75MR16Q/FL/LN     | Card         | 2940         | 32°         | Flood        | C8            | 3050                       | 2000             | EYC       | 1.8            | \$9.03                    | 1.81" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

### Footnotes

1 Clear Lens

3 Eco-Halogen Energy-Saving Technology

5 Krypton(K) / Xenon(X)

2 Frost Lens

4 Rough Service

6 Long Neck

[www.westinghouselighting.com](http://www.westinghouselighting.com)

# MR16 LAMPS, 120 VOLT DICHROIC (LINE VOLTAGE)



| Item No.             | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code          | Package Type | Candle Power | Beam Spread | Beam Type | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|----------------------|---------------------|-----------|-----------|------------------------|--------------|--------------|-------------|-----------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>MR16 120 VOLT</b> |                     |           |           |                        |              |              |             |           |               |                            |                     |                  |                |                           |       |
| 04787                | 25                  | GU10      | 1         | 25MR16Q/GU10/FL/LN     | Card         | 300          | 30°         | Flood     | CC2V          | 3050                       | 140                 | 2000             | 1.8            | \$3.01                    | 2.00" |
| 04741                | 35                  | GU10      | 1         | 35MR16Q/GU10/FL/LN     | Card         | 500          | 32°         | Flood     | CC2V          | 2800                       | 180                 | 1500             | 1.3            | \$4.22                    | 2.00" |
| 04711                | 45                  | GU7.9/8.0 | 1         | 45MR16Q/FL/LN          | Card         | 1800         | 36°         | Flood     | CC2V          | 3050                       | 270                 | 2000             | 1.8            | \$5.42                    | 1.75" |
| 04725                | 50                  | GU7.9/8.0 | 1         | 50MR16Q/FL/LN          | Card         | 950          | 32°         | Flood     | CC2V          | 3050                       | 330                 | 2000             | 1.8            | \$6.02                    | 1.75" |
| 04740                | 50                  | GU10      | 1         | 50MR16Q/GU10/FL/LN     | Card         | 950          | 32°         | Flood     | CC2V          | 3050                       | 330                 | 1500             | 1.3            | \$6.02                    | 2.00" |
| 03529                | 50                  | GU10      | 2         | 50MR16Q/GU10/F/FL/LN   | Card         | 900          | 36°         | Flood     | CC2V          | 3050                       | 330                 | 2000             | 1.8            | \$6.02                    | 2.00" |
| 06211                | 50                  | GU10      | 1,5       | 50MR16X/FL/GU10/LN 2CD | Card (2)     | 1100         | 30°         | Flood     | CC2V          | 3050                       | 500                 | 3500             | 3.1            | \$6.02                    | 2.00" |
| 04730                | 50                  | GU10      | 1         | 50MR16Q/GU10/FL/LN 3CD | Card (3)     | 950          | 32°         | Flood     | CC2V          | 3050                       | 330                 | 2000             | 1.8            | \$6.02                    | 2.00" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh



JDR MEDIUM BASE

# JDR LAMPS, 120 VOLT (LINE VOLTAGE)

| Item No.            | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code   | Package Type | Candle Power | Beam Spread | Beam Type    | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------------|---------------------|-----------|-----------|-----------------|--------------|--------------|-------------|--------------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>JDR 120 VOLT</b> |                     |           |           |                 |              |              |             |              |               |                            |                     |                  |                |                           |       |
| 04753               | 50                  | Med.      | 1         | 50JDR16Q/FL/LN  | Card         | 1000         | 36°         | Flood        | CC8           | 2800                       | 330                 | 2000             | 1.8            | \$6.02                    | 3.00" |
| 04731               | 75                  | Med.      | 1         | 75JDR16Q/NFL/LN | Card         | 1350         | 20°         | Narrow Flood | CC8           | 2900                       | 630                 | 1500             | 1.3            | \$9.03                    | 2.75" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh



JC CLEAR G4 BASE



JC FROST G4 BASE



JC CLEAR GY6.35 BASE



JC FROST GY6.35 BASE

# JC LAMPS (LOW VOLTAGE)

| Item No. | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|----------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| T3       |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 06240    | 5                   | G4        |           | 5T3           | 12    | Card         | Clear  | C8            | 2800                       | 60                  | 2000             | 1.8            | \$0.60                    | 1.31" |
| 04442    | 10                  | G4        |           | 10T3          | 12    | Box          | Clear  | C6            | 2900                       | 130                 | 2000             | 1.8            | \$1.20                    | 1.19" |
| 04742    | 10                  | G4        |           | 10T3          | 12    | Card         | Clear  | C8            | 2900                       | 120                 | 2000             | 1.8            | \$1.20                    | 1.19" |
| 06216    | 10                  | G4        | 5         | 10T3X 2CD     | 12    | Card (2)     | Clear  | C6            | 2900                       | 100                 | 5000             | 4.5            | \$1.20                    | 1.19" |
| 04444    | 20                  | GY6.35    |           | 20T3Q         | 12    | Box          | Clear  | C6            | 2950                       | 300                 | 2000             | 1.8            | \$2.41                    | 1.63" |
| 04436    | 20                  | G4        |           | 20T3          | 12    | Box          | Clear  | C6            | 2950                       | 300                 | 2000             | 1.8            | \$2.41                    | 1.19" |
| 04736    | 20                  | G4        |           | 20T3          | 12    | Card         | Clear  | C8            | 2950                       | 300                 | 2000             | 1.8            | \$2.41                    | 1.19" |
| 04734    | 20                  | G4        |           | 20T3/F        | 12    | Card         | Frost  | C8            | 2950                       | 290                 | 2000             | 1.8            | \$2.41                    | 1.19" |
| 06209    | 20                  | G4        | 5         | 20T3X 2CD     | 12    | Card (2)     | Clear  | C6            | 2900                       | 300                 | 10000            | 9.1            | \$2.41                    | 1.19" |
| 04438    | 50                  | GY6.35    |           | 50T3Q         | 12    | Box          | Clear  | C6            | 3050                       | 900                 | 2000             | 1.8            | \$6.02                    | 1.63" |
| T4       |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 04743    | 20                  | GY6.35    |           | 20T4Q         | 12    | Card         | Clear  | C6            | 2950                       | 300                 | 2000             | 1.8            | \$2.41                    | 1.63" |
| 04745    | 35                  | GY6.35    |           | 35T4Q         | 12    | Card         | Clear  | C6            | 3000                       | 600                 | 2000             | 1.8            | \$4.22                    | 1.63" |
| 04738    | 50                  | GY6.35    |           | 50T4Q         | 12    | Card         | Clear  | C6            | 3050                       | 900                 | 2000             | 1.8            | \$6.02                    | 1.63" |
| 04735    | 50                  | GY6.35    |           | 50T4Q/F       | 12    | Card         | Frost  | C6            | 3050                       | 870                 | 2000             | 1.8            | \$6.02                    | 1.63" |
| 04739    | 75                  | GY6.35    |           | 75T4Q         | 12    | Card         | Clear  | C6            | 3050                       | 1350                | 2000             | 1.8            | \$9.03                    | 1.63" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Clear Lens  
2 Frost Lens

3 Eco-Halogen Energy-Saving Technology  
4 Rough Service

5 Krypton(K) / Xenon(X)  
6 Long Neck



# JCD LAMPS



| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code    | Volts | Package Type | Finish | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|------------------|-------|--------------|--------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>JCD</b> |                     |           |           |                  |       |              |        |               |                            |                     |                  |                |                           |       |
| 04710      | 20                  | GY7.9/8.0 |           | 20T4Q/GY8/120    | 120   | Card         | Clear  | CC2V          | 2700                       | 200                 | 1500             | 1.3            | \$2.41                    | 1.69" |
| 06210      | 20                  | G8        | 5         | 20T4X/G8/120 2CD | 120   | Card (2)     | Clear  | CC2V-H        | 2700                       | 175                 | 5000             | 4.5            | \$2.41                    | 1.38" |
| 04715      | 25                  | GY6.35    |           | 25T4Q/120        | 120   | Card         | Clear  | CC8           | 2850                       | 255                 | 1500             | 1.3            | \$3.01                    | 1.81" |
| 04721      | 25                  | GY7.9/8.0 |           | 25T4Q/GY8/120    | 120   | Card         | Clear  | CC2V          | 2850                       | 255                 | 1500             | 1.3            | \$3.01                    | 1.69" |
| 04031      | 35                  | GY6.35    |           | 35T4Q/120        | 120   | Card         | Clear  | CC2V          | 2900                       | 380                 | 1500             | 1.3            | \$4.22                    | 1.81" |
| 04722      | 35                  | GY7.9/8.0 |           | 35T4Q/GY8/120    | 120   | Card         | Clear  | CC8           | 2900                       | 380                 | 1500             | 1.3            | \$4.22                    | 1.69" |
| 04712      | 35                  | GY8.6     |           | 35T4Q/GY8.6/120  | 120   | Card         | Clear  | CC8           | 2900                       | 380                 | 1500             | 1.3            | \$4.22                    | 1.81" |
| 04717      | 50                  | GY6.35    |           | 50T4Q/120        | 120   | Card         | Clear  | CC2V          | 2900                       | 600                 | 1500             | 1.3            | \$6.02                    | 1.81" |
| 04889      | 50                  | G8        |           | 50T4Q/G8/120     | 120   | Card         | Clear  | CC8           | 2900                       | 600                 | 1500             | 1.3            | \$6.02                    | 2.25" |
| 04714      | 75                  | GY8.6     |           | 75T4Q/GY8.6/120  | 120   | Card         | Clear  | CC8           | 2900                       | 1050                | 1500             | 1.3            | \$9.03                    | 2.25" |
| 04764      | 75                  | GY7.9/8.0 |           | 75T4Q/GY8/130    | 130   | Card         | Clear  | CC8           | 2800                       | 975                 | 2000             | 1.8            | \$9.03                    | 2.25" |
| 04719      | 100                 | GY6.35    |           | 100T4Q/120       | 120   | Card         | Clear  | CC8           | 2900                       | 1500                | 1500             | 1.3            | \$12.05                   | 2.25" |
| 04713      | 100                 | GY8.6     |           | 100T4Q/GY8.6/120 | 120   | Card         | Clear  | CC8           | 2900                       | 1500                | 1500             | 1.3            | \$12.05                   | 2.25" |
| 04770      | 100                 | GY7.9/8.0 |           | 100T4Q/GY8/130   | 130   | Card         | Clear  | CC8           | 2850                       | 1400                | 2000             | 1.8            | \$12.05                   | 2.25" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# G9 LAMPS, 120 VOLT (LINE VOLTAGE)



| Item No.    | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code  | Package Type | Finish | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-------------|---------------------|-----------|-----------|----------------|--------------|--------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| G9 120 VOLT |                     |           |           |                |              |        |               |                            |                     |                  |                |                           |       |
| 04870       | 25                  | G9        |           | 25T4Q/G9/120   | Card         | Clear  | CC2V          | 2800                       | 255                 | 2000             | 1.8            | \$3.01                    | 1.69" |
| 04901       | 40                  | G9        |           | 40T4Q/G9/120   | Box          | Clear  | CC2V          | 2800                       | 480                 | 2000             | 1.8            | \$4.82                    | 1.69" |
| 04871       | 40                  | G9        |           | 40T4Q/G9/120   | Card         | Clear  | CC2V          | 2800                       | 480                 | 2000             | 1.8            | \$4.82                    | 1.69" |
| 04855       | 40                  | G9        |           | 40T4Q/G9/F/120 | Card         | Frost  | CC2V          | 2800                       | 460                 | 2000             | 1.8            | \$4.82                    | 1.69" |
| 04879       | 60                  | G9        |           | 60T4Q/G9/120   | Card         | Clear  | CC2V          | 2800                       | 800                 | 2000             | 1.8            | \$7.23                    | 1.69" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# SINGLE-ENDED LAMPS, D.C. BAYONET AND E11 BASE



| Item No.                 | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|--------------------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>D.C. BAYONET BASE</b> |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 04835                    | 50                  | D.C. Bay. |           | 50Q/DC        | 120   | Card         | Clear  | CC2V          | 2900                       | 600                 | 1500             | 1.3            | \$6.02                    | 1.88" |
| 04746                    | 100                 | D.C. Bay. |           | 100Q/DC       | 120   | Card         | Clear  | CC8           | 2950                       | 1500                | 1500             | 1.3            | \$12.05                   | 2.38" |
| <b>E11 BASE</b>          |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 04423                    | 50                  | E11       |           | 50T4Q/E11     | 120   | Box          | Clear  | CC2V          | 2900                       | 600                 | 1300             | 1.1            | \$6.02                    | 2.25" |
| 04723                    | 50                  | E11       |           | 50T4Q/E11     | 120   | Card         | Clear  | CC2V          | 2900                       | 600                 | 1300             | 1.1            | \$6.02                    | 2.25" |
| 04716                    | 75                  | E11       |           | 75T4Q/E11     | 120   | Card         | Clear  | CC8           | 2900                       | 1450                | 1300             | 1.1            | \$9.03                    | 2.50" |
| 04706                    | 75                  | E11       |           | 75T4Q/F/E11   | 120   | Card         | Frost  | CC8           | 2900                       | 1050                | 1300             | 1.1            | \$9.03                    | 2.50" |
| 04767                    | 100                 | E11       |           | 100T4Q/E11    | 120   | Card         | Clear  | CC8           | 2950                       | 1900                | 1300             | 1.1            | \$12.05                   | 2.69" |
| 04768                    | 150                 | E11       |           | 150T4Q/E11    | 120   | Card         | Clear  | CC8           | 3000                       | 2500                | 1300             | 1.1            | \$18.07                   | 2.69" |
| 04470                    | 500                 | E11       |           | 500T4Q/E11    | 120   | Box          | Clear  | CC8           | 3100                       | 9000                | 2000             | 1.8            | \$60.23                   | 3.50" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Clear Lens

3 Eco-Halogen Energy-Saving Technology

5 Krypton(K) / Xenon(X)

2 Frost Lens

4 Rough Service

6 Long Neck

www.westinghouselighting.com

## T3 SINGLE-ENDED LAMPS, XENON/KRYPTON



| Item No.  | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-----------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>T3</b> |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 06243     | 40                  | E11       | 5         | 40T3/KX/E11   | 120   | Card         | Clear  | CC8           | 2800                       | 560                 | 2000             | 1.8            | \$4.82                    | 2.50" |
| 06251     | 40                  | Cand.     | 5         | 40T3/KX/E12   | 120   | Box          | Clear  | CC8           | 2800                       | 560                 | 2000             | 1.8            | \$4.82                    | 2.50" |
| 06244     | 40                  | Cand.     | 5         | 40T3/KX/E12   | 120   | Card         | Clear  | CC8           | 2800                       | 560                 | 2000             | 1.8            | \$4.82                    | 2.50" |
| 06254     | 40                  | Cand.     | 5         | 40T3/KX/F/E12 | 120   | Box          | Frost  | CC8           | 2950                       | 540                 | 2000             | 1.8            | \$4.82                    | 2.50" |
| 06252     | 60                  | Cand.     | 5         | 60T3/KX/E12   | 120   | Box          | Clear  | CC8           | 2800                       | 960                 | 2000             | 1.8            | \$7.23                    | 2.50" |
| 06245     | 60                  | Cand.     | 5         | 60T3/KX/E12   | 120   | Card         | Clear  | CC8           | 2800                       | 960                 | 2000             | 1.8            | \$7.23                    | 2.50" |
| 06255     | 60                  | Cand.     | 5         | 60T3/KX/F/E12 | 120   | Box          | Frost  | CC8           | 2950                       | 950                 | 2000             | 1.8            | \$7.23                    | 2.50" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## DOUBLE-ENDED LAMPS



| Item No.                   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|----------------------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>DOUBLE-ENDED, SHORT</b> |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 04779                      | 75                  | RSC       |           | 75T3Q         | 120   | Card         | Clear  | CC2V          | 2800                       | 1050                | 1500             | 1.3            | \$9.03                    | 3.07" |
| 04777                      | 100                 | RSC       |           | 100T3Q        | 120   | Card         | Clear  | CC8           | 2900                       | 1650                | 1500             | 1.3            | \$12.05                   | 3.07" |
| 04774                      | 150                 | RSC       |           | 150T3Q        | 120   | Card         | Clear  | CC8           | 3000                       | 2600                | 2000             | 1.8            | \$18.07                   | 3.07" |
| 04974                      | 150                 | RSC       |           | 150T3Q 2CD    | 120   | Card (2)     | Clear  | CC8           | 3000                       | 2600                | 2000             | 1.8            | \$18.07                   | 3.07" |
| 04783                      | 150                 | RSC       | 4         | 150T3Q/RS/130 | 130   | Card         | Clear  | CC8           | 3000                       | 2600                | 1500             | 1.3            | \$18.07                   | 3.07" |
| 04759                      | 250                 | RSC       |           | 250T3Q        | 120   | Card         | Clear  | CC8           | 3050                       | 4000                | 1500             | 1.3            | \$30.11                   | 3.07" |
| 04775                      | 300                 | RSC       |           | 300T3Q        | 120   | Card         | Clear  | CC2V          | 3050                       | 5000                | 1500             | 1.3            | \$36.14                   | 3.07" |
| <b>DOUBLE-ENDED, LONG</b>  |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 06242                      | 100                 | RSC       |           | 100T3Q        | 120   | Card         | Clear  | CC2V          | 2800                       | 1450                | 1500             | 1.3            | \$12.05                   | 4.65" |
| 04773                      | 150                 | RSC       |           | 150T3Q        | 120   | Card         | Clear  | CC2V          | 2950                       | 2600                | 2000             | 1.8            | \$18.07                   | 4.65" |
| 04973                      | 150                 | RSC       |           | 150T3Q 2CD    | 120   | Card (2)     | Clear  | CC2V          | 2950                       | 2600                | 2000             | 1.8            | \$18.07                   | 4.65" |
| 04784                      | 150                 | RSC       | 4         | 150T3Q/RS/130 | 130   | Card         | Clear  | C8            | 2950                       | 2400                | 1500             | 1.3            | \$18.07                   | 4.65" |
| 04976                      | 300                 | RSC       |           | 300T3Q 2CD    | 120   | Card (2)     | Clear  | C8            | 3000                       | 5000                | 2000             | 1.8            | \$36.14                   | 4.65" |
| 04786                      | 300                 | RSC       | 4         | 300T3Q/RS/130 | 130   | Card         | Clear  | C8            | 3000                       | 5000                | 1500             | 1.3            | \$36.14                   | 4.65" |
| 04978                      | 500                 | RSC       |           | 500T3Q 2CD    | 120   | Card (2)     | Clear  | C8            | 3050                       | 9500                | 2000             | 1.8            | \$60.23                   | 4.65" |
| 04788                      | 500                 | RSC       | 4         | 500T3Q/RS/130 | 130   | Card         | Clear  | C8            | 3050                       | 9500                | 1500             | 1.3            | \$60.23                   | 4.65" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Clear Lens  
2 Frost Lens

3 Eco-Halogen Energy-Saving Technology  
4 Rough Service

5 Krypton(K) / Xenon(X)  
6 Long Neck



BR25

# REFLECTOR LAMP

| Item No.    | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code   | Volts | Package Type | Beam Type | Finish | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-------------|---------------------|-----------|-----------|-----------------|-------|--------------|-----------|--------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>BR25</b> |                     |           |           |                 |       |              |           |        |               |                            |                     |                  |                |                           |       |
| 36861       | 55                  | Med.      | 3         | 55BR25/H/FL/ECO | 120   | Box          | Flood     | Frost  | CC8           | 3000                       | 960                 | 1000             | 0.9            | \$6.62                    | 4.72" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## PAR REFLECTOR LAMPS



| Item No.     | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code                | Volts | Package Type | Beam Spread | Beam Type | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|--------------|---------------------|-----------|-----------|------------------------------|-------|--------------|-------------|-----------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>PAR16</b> |                     |           |           |                              |       |              |             |           |               |                            |                     |                  |                |                           |       |
| 05401        | 40                  | Med.      |           | 40PAR16/H/FL                 | 120   | Box          | 30°         | Flood     | CC8           | 2950                       | 400                 | 2000             | 1.8            | \$4.82                    | 3.13" |
| <b>PAR20</b> |                     |           |           |                              |       |              |             |           |               |                            |                     |                  |                |                           |       |
| 36849        | 38                  | Med.      | 3         | 38PAR20/H/FL/ECO             | 120   | Box          | 30°         | Flood     | CC8           | 2800                       | 500                 | 1000             | 0.9            | \$4.58                    | 3.23" |
| 36850        | 38                  | Med.      | 3         | 38PAR20/H/FL/ECO/PLUS        | 120   | Box          | 30°         | Flood     | CC8           | 2750                       | 500                 | 2000             | 1.8            | \$4.58                    | 3.23" |
| 36851        | 38                  | Med.      | 3         | 38PAR20/H/FL/ECO/PLUS 2PK    | 120   | Box (2)      | 30°         | Flood     | CC8           | 2750                       | 500                 | 2000             | 1.8            | \$4.58                    | 3.23" |
| <b>PAR30</b> |                     |           |           |                              |       |              |             |           |               |                            |                     |                  |                |                           |       |
| 36848        | 38                  | Med.      | 3         | 38PAR30/H/FL/ECO             | 120   | Box          | 30°         | Flood     | CC8           | 2800                       | 530                 | 1000             | 0.9            | \$4.58                    | 3.54" |
| 36844        | 38                  | Med.      | 3,6       | 38PAR30/H/FL/LN/ECO          | 120   | Box          | 30°         | Flood     | CC8           | 2800                       | 520                 | 1000             | 0.9            | \$4.58                    | 4.61" |
| 36847        | 38                  | Med.      | 3         | 38PAR30/H/FL/ECO/PLUS        | 120   | Box          | 30°         | Flood     | CC8           | 2750                       | 530                 | 2000             | 1.8            | \$4.58                    | 3.54" |
| 36843        | 38                  | Med.      | 3,6       | 38PAR30/H/FL/LN/ECO/PLUS     | 120   | Box          | 30°         | Flood     | CC8           | 2750                       | 520                 | 2000             | 1.8            | \$4.58                    | 4.61" |
| 36845        | 60                  | Med.      | 3         | 60PAR30/H/FL/ECO             | 120   | Box          | 30°         | Flood     | CC8           | 2900                       | 1070                | 1000             | 0.9            | \$7.23                    | 3.54" |
| 36841        | 60                  | Med.      | 3,6       | 60PAR30/H/FL/LN/ECO          | 120   | Box          | 30°         | Flood     | CC8           | 2900                       | 1070                | 1000             | 0.9            | \$7.23                    | 4.61" |
| 36846        | 60                  | Med.      | 3         | 60PAR30/H/FL/ECO/PLUS        | 120   | Box          | 30°         | Flood     | CC8           | 2850                       | 1070                | 2000             | 1.8            | \$7.23                    | 3.54" |
| 36842        | 60                  | Med.      | 3,6       | 60PAR30/H/FL/LN/ECO/PLUS     | 120   | Box          | 30°         | Flood     | CC8           | 2850                       | 1070                | 2000             | 1.8            | \$7.23                    | 4.61" |
| 36854        | 60                  | Med.      | 3,6       | 60PAR30/H/FL/LN/ECO/PLUS 2PK | 120   | Box (2)      | 30°         | Flood     | CC8           | 2850                       | 1070                | 2000             | 1.8            | \$7.23                    | 4.61" |
| <b>PAR38</b> |                     |           |           |                              |       |              |             |           |               |                            |                     |                  |                |                           |       |
| 36838        | 60                  | Med.      | 3         | 60PAR38/H/FL/ECO             | 120   | Box          | 30°         | Flood     | CC8           | 2900                       | 1070                | 1000             | 0.9            | \$7.23                    | 5.35" |
| 36836        | 70                  | Med.      | 3         | 70PAR38/H/FL/ECO             | 120   | Box          | 30°         | Flood     | CC8           | 3000                       | 1310                | 1000             | 0.9            | \$8.43                    | 5.35" |
| 36859        | 70                  | Med.      | 3         | 70PAR38/H/FL/ECO 2PK         | 120   | Box (2)      | 30°         | Flood     | CC8           | 3000                       | 1310                | 1000             | 0.9            | \$8.43                    | 5.35" |
| 36837        | 70                  | Med.      | 3         | 70PAR38/H/FL/ECO/PLUS        | 120   | Box          | 30°         | Flood     | CC8           | 2950                       | 1310                | 2000             | 1.8            | \$8.43                    | 5.35" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

### Footnotes

- 1 Clear Lens
- 2 Frost Lens
- 3 Eco-Halogen Energy-Saving Technology
- 4 Rough Service
- 5 Krypton(K) / Xenon(X)
- 6 Long Neck

# ECO-HALOGEN A19 LAMPS



| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code      | Volts | Package Type | Finish     | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|--------------------|-------|--------------|------------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>A19</b> |                     |           |           |                    |       |              |            |               |                            |                     |                  |                |                           |       |
| 36870      | 29                  | Med.      | 3         | 29A19/H/SW/ECO 4PK | 120   | Box (4)      | Soft White | CC8           | 2900                       | 450                 | 1000             | 0.9            | \$3.49                    | 4.25" |
| 36832      | 42                  | Med.      | 3         | 42A19/H/ECO 2PK    | 120   | Box (2)      | Clear      | CC8           | 3000                       | 760                 | 1000             | 0.9            | \$5.06                    | 4.25" |
| 36800      | 42                  | Med.      | 3         | 42A19/H/SW/ECO 2PK | 120   | Box (2)      | Soft White | CC8           | 3000                       | 760                 | 1000             | 0.9            | \$5.06                    | 4.25" |
| 36834      | 53                  | Med.      | 3         | 53A19/H/ECO 2PK    | 120   | Box (2)      | Clear      | CC8           | 3000                       | 1100                | 1000             | 0.9            | \$6.38                    | 4.25" |
| 36801      | 72                  | Med.      | 3         | 72A19/H/SW/ECO 2PK | 120   | Box (2)      | Soft White | CC8           | 3000                       | 1600                | 1000             | 0.9            | \$8.67                    | 4.25" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# SPECIALTY AND DECORATIVE LAMPS



| Item No.    | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code   | Volts | Package Type | Finish     | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-------------|---------------------|-----------|-----------|-----------------|-------|--------------|------------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>SL19</b> |                     |           |           |                 |       |              |            |               |                            |                     |                  |                |                           |       |
| 05018       | 43                  | Med.      | 3         | 43SL19/H/CG/ECO | 120   | Box          | Cut Glass  | CC8           | 2900                       | 750                 | 1000             | 0.9            | \$5.18                    | 4.92" |
| <b>G25</b>  |                     |           |           |                 |       |              |            |               |                            |                     |                  |                |                           |       |
| 05017       | 40                  | Med.      | 3         | 40G25/H/CG/ECO  | 120   | Box          | Cut Glass  | CC8           | 2850                       | 520                 | 2000             | 1.8            | \$4.82                    | 4.65" |
| <b>BT15</b> |                     |           |           |                 |       |              |            |               |                            |                     |                  |                |                           |       |
| 05013       | 43                  | Med.      | 3         | 43BT15/H/ECO    | 120   | Card         | Clear      | CC8           | 2900                       | 750                 | 1000             | 0.9            | \$5.18                    | 4.13" |
| 05012       | 43                  | Med.      | 3         | 43BT15/H/SW/ECO | 120   | Card         | Soft White | CC8           | 2900                       | 750                 | 1000             | 0.9            | \$5.18                    | 4.13" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# XENON LAMPS (WEDGE)



| Item No.      | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Color Temperature (Kelvin) | Brightness (Lumens) | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|----------------------------|---------------------|------------------|----------------|---------------------------|-------|
| <b>T3 1/4</b> |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 06204         | 5                   | Wedge     | 5         | 5T31/4X/12V   | 12    | Box          | Clear  | C2V           | 2900                       | 38                  | 2800             | 2.5            | \$0.60                    | 0.95" |
| <b>T5</b>     |                     |           |           |               |       |              |        |               |                            |                     |                  |                |                           |       |
| 06215         | 18                  | Wedge     | 5         | 18T5X/12V     | 12    | Card         | Clear  | C2R           | 2900                       | 210                 | 1000             | 0.9            | \$2.17                    | 1.43" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Clear Lens  
2 Frost Lens

3 Eco-Halogen Energy-Saving Technology  
4 Rough Service

5 Krypton(K) / Xenon(X)  
6 Long Neck

# ALL-PURPOSE, DECORATIVE AND SPECIALTY INCANDESCENT LIGHTING

We offer a wide range of incandescent lamps  
to meet decorative, general purpose, low voltage, specialty  
and rough service applications.



## GLOWESCENT® SHATTER RESISTANT LAMPS (SPUN SATIN)

| Item No.               | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code       | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------------------|---------------------|-----------|-----------|---------------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>C11 GLOWESCENT®</b> |                     |           |           |                     |       |              |        |               |                  |                            |                     |                |                           |       |
| 03025                  | 40                  | Cand.     |           | 40C11/GLOWESCENT/CB | 120   | Card         | White  | C7A           | 1500             | 2700                       | 320                 | 1.3            | \$4.82                    | 4.00" |
| <b>C15 GLOWESCENT®</b> |                     |           |           |                     |       |              |        |               |                  |                            |                     |                |                           |       |
| 03018                  | 40                  | Med.      |           | 40C15/GLOWESCENT    | 120   | Card         | White  | C9            | 1500             | 2700                       | 320                 | 1.3            | \$4.82                    | 4.50" |
| 03019                  | 60                  | Med.      |           | 60C15/GLOWESCENT    | 120   | Card         | White  | C9            | 1500             | 2700                       | 600                 | 1.3            | \$7.23                    | 4.50" |
| <b>H19 GLOWESCENT®</b> |                     |           |           |                     |       |              |        |               |                  |                            |                     |                |                           |       |
| 03336                  | 75                  | Med.      |           | 75H19/GLOWESCENT    | 120   | Box          | White  | C9            | 1500             | 2700                       | 825                 | 1.3            | \$9.03                    | 5.81" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh



CA8

## FLICKER FLAME LAMPS

| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>CA8</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03656      | 3                   | Cand.     |           | 3CA8/FLK/CB   | 120   | Box          | Clear  | Flicker       | 1500             | -                          | -                   | 1.3            | \$0.36                    | 3.50" |
| 03756      | 3                   | Cand.     |           | 3CA8/FLK/CB   | 120   | Card         | Clear  | Flicker       | 1500             | -                          | -                   | 1.3            | \$0.36                    | 3.50" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh



F15 CLEAR



CST6 PUNTINO



STAR

## F15 AND DECORATIVE SPECIALTY LAMPS

| Item No.            | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>F15</b>          |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 04034               | 40                  | Med.      |           | 40F15 2CD     | 120   | Card (2)     | Clear  | C9            | 1500             | 2700                       | 360                 | 1.3            | \$4.82                    | 4.50" |
| <b>CST6 PUNTINO</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03250               | 15                  | Cand.     |           | 15CST6/CB     | 120   | Box          | Clear  | C7A           | 1500             | 2700                       | 97                  | 1.3            | \$1.81                    | 2.81" |
| <b>STAR</b>         |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03747               | 7                   | Cand.     |           | 7STAR/CB      | 120   | Box          | Clear  | C7A           | 1000             | 2700                       | 45                  | 0.9            | \$0.84                    | 2.75" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

### Footnotes

1 Canadian Standards Association   
2 Commercial Service\*

3 Fan  
4 Non-Stick Base

[www.westinghouselighting.com](http://www.westinghouselighting.com)

FLAME TIP  
LAMPS

| Item No.                  | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code        | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------------------|---------------------|-----------|-----------|----------------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>CA5 (FLAMME TWIST)</b> |                     |           |           |                      |       |              |        |               |                  |                            |                     |                |                           |       |
| 03241                     | 7.5                 | Cand.     |           | 7.5CA5/CB            | 120   | Box          | Clear  | C7A           | 3000             | 2700                       | 39                  | 2.7            | \$0.90                    | 2.81" |
| 03242                     | 7.5                 | Cand.     |           | 7.5CA5/F/CB          | 120   | Box          | Frost  | C7A           | 3000             | 2700                       | 37                  | 2.7            | \$0.90                    | 2.81" |
| 03755                     | 7.5                 | Cand.     |           | 7.5CA5/CB 3CD        | 120   | Card (3)     | Clear  | C7A           | 3000             | 2700                       | 39                  | 2.7            | \$0.90                    | 2.81" |
| <b>CA7</b>                |                     |           |           |                      |       |              |        |               |                  |                            |                     |                |                           |       |
| 03671                     | 10                  | Cand.     |           | 10CA7/CB/130         | 130   | Box          | Clear  | C7A           | 2500             | 2700                       | 58                  | 2.2            | \$1.20                    | 2.81" |
| <b>CA8</b>                |                     |           |           |                      |       |              |        |               |                  |                            |                     |                |                           |       |
| 03670                     | 7.5                 | Cand.     | 2         | 7.5CA8/CB/130        | 130   | Box          | Clear  | C7A           | 2500             | 2700                       | 40                  | 2.2            | \$0.90                    | 3.50" |
| 03273                     | 15                  | Cand.     |           | 15CA8/CB             | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 100                 | 1.3            | \$1.81                    | 3.50" |
| 03777                     | 15                  | Cand.     |           | 15CA8/F/CB 2CD       | 120   | Card (2)     | Frost  | CC2V          | 1500             | 2700                       | 90                  | 1.3            | \$1.81                    | 3.50" |
| 03673                     | 15                  | Cand.     | 2         | 15CA8/CB/130         | 130   | Box          | Clear  | C7A           | 2500             | 2700                       | 75                  | 2.2            | \$1.81                    | 3.50" |
| 03274                     | 25                  | Cand.     |           | 25CA8/CB             | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 190                 | 1.3            | \$3.01                    | 3.50" |
| 03278                     | 25                  | Cand.     |           | 25CA8/F/CB           | 120   | Box          | Frost  | CC2V          | 1500             | 2700                       | 175                 | 1.3            | \$3.01                    | 3.50" |
| 03774                     | 25                  | Cand.     |           | 25CA8/CB 2CD         | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 175                 | 1.3            | \$3.01                    | 3.50" |
| 03674                     | 25                  | Cand.     | 2         | 25CA8/CB/130         | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 158                 | 2.2            | \$3.01                    | 3.50" |
| 05106                     | 25                  | Cand.     | 2         | 25CA8/CB/130 25PK    | 130   | Box (25)     | Clear  | CC2V          | 2500             | 2700                       | 158                 | 2.2            | \$3.01                    | 3.50" |
| <b>CA9 1/2</b>            |                     |           |           |                      |       |              |        |               |                  |                            |                     |                |                           |       |
| 03275                     | 40                  | Cand.     |           | 40CA91/2/CB          | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 3.75" |
| 03775                     | 40                  | Cand.     |           | 40CA91/2/CB 2CD      | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 3.75" |
| 03675                     | 40                  | Cand.     | 2         | 40CA91/2/CB/130      | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 330                 | 2.2            | \$4.82                    | 3.75" |
| 03679                     | 40                  | Cand.     | 2         | 40CA91/2/F/CB/130    | 130   | Box          | Frost  | CC2V          | 2500             | 2700                       | 310                 | 2.2            | \$4.82                    | 3.75" |
| 05107                     | 40                  | Cand.     | 2         | 40CA91/2/CB/130 25PK | 130   | Box (25)     | Clear  | CC2V          | 2500             | 2700                       | 330                 | 2.2            | \$4.82                    | 3.75" |
| <b>CA10</b>               |                     |           |           |                      |       |              |        |               |                  |                            |                     |                |                           |       |
| 03262                     | 60                  | Cand.     |           | 60CA10/CB            | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 615                 | 1.3            | \$7.23                    | 4.00" |
| 03762                     | 60                  | Cand.     |           | 60CA10/CB 2CD        | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 615                 | 1.3            | \$7.23                    | 4.00" |
| 03662                     | 60                  | Cand.     | 2         | 60CA10/CB/130        | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 600                 | 2.2            | \$7.23                    | 4.00" |
| <b>CA10 Medium Base</b>   |                     |           |           |                      |       |              |        |               |                  |                            |                     |                |                           |       |
| 03664                     | 25                  | Med.      | 2         | 25CA10/130           | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 190                 | 2.2            | \$3.01                    | 4.00" |
| 03765                     | 40                  | Med.      |           | 40CA10 2CD           | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 4.00" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

TORPEDO  
LAMPS

| Item No.      | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code       | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------|---------------------|-----------|-----------|---------------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>B9 1/2</b> |                     |           |           |                     |       |              |        |               |                  |                            |                     |                |                           |       |
| 03230         | 15                  | Cand.     |           | 15B91/2/CB          | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 104                 | 1.3            | \$1.81                    | 3.33" |
| 03681         | 15                  | Cand.     | 2         | 15B91/2/CB/130      | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 100                 | 2.2            | \$1.81                    | 3.33" |
| 03282         | 25                  | Cand.     |           | 25B91/2/CB          | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 190                 | 1.3            | \$3.01                    | 3.33" |
| 03285         | 25                  | Cand.     |           | 25B91/2/F/CB        | 120   | Box          | Frost  | CC2V          | 1500             | 2700                       | 175                 | 1.3            | \$3.01                    | 3.33" |
| 03782         | 25                  | Cand.     |           | 25B91/2/CB 2CD      | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 190                 | 1.3            | \$3.01                    | 3.33" |
| 03682         | 25                  | Cand.     | 2         | 25B91/2/CB/130      | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 170                 | 2.2            | \$3.01                    | 3.33" |
| 03283         | 40                  | Cand.     |           | 40B91/2/CB          | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 3.33" |
| 03783         | 40                  | Cand.     |           | 40B91/2/CB 2CD      | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 3.33" |
| 04023         | 40                  | Cand.     | 3         | 40B9 1/2/FAN/CB 2CD | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 3.33" |
| 03683         | 40                  | Cand.     | 2         | 40B91/2/CB/130      | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 345                 | 2.2            | \$4.82                    | 3.33" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Canadian Standards Association   
 2 Commercial Service\*

3 Fan  
 4 Non-Stick Base

TORPEDO  
LAMPS

| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code    | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|------------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>B10</b> |                     |           |           |                  |       |              |        |               |                  |                            |                     |                |                           |       |
| 03284      | 60                  | Cand.     |           | 60B10/CB         | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 615                 | 1.3            | \$7.23                    | 3.75" |
| 03784      | 60                  | Cand.     |           | 60B10/CB 2CD     | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 615                 | 1.3            | \$7.23                    | 3.75" |
| 04027      | 60                  | Cand.     | 3         | 60B10/FAN/CB 2CD | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 615                 | 1.3            | \$7.23                    | 3.75" |
| 03684      | 60                  | Cand.     | 2         | 60B10/CB/130     | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 610                 | 2.2            | \$7.23                    | 3.75" |
| 03687      | 60                  | Cand.     | 2         | 60B10/F/CB/130   | 130   | Box          | Frost  | CC2V          | 2500             | 2700                       | 575                 | 2.2            | \$7.23                    | 3.75" |
| <b>B11</b> |                     |           |           |                  |       |              |        |               |                  |                            |                     |                |                           |       |
| 03734      | 25                  | Med.      |           | 25B11/F 2CD      | 120   | Card (2)     | Frost  | CC2V          | 1500             | 2700                       | 175                 | 1.3            | \$3.01                    | 3.63" |
| 03232      | 40                  | Med.      | 1         | 40B11            | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 3.63" |
| 03235      | 40                  | Med.      |           | 40B11/F          | 120   | Box          | Frost  | CC2V          | 1500             | 2700                       | 350                 | 1.3            | \$4.82                    | 3.63" |
| 03732      | 40                  | Med.      | 1         | 40B11 2CD        | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 3.63" |
| 03735      | 40                  | Med.      |           | 40B11/F 2CD      | 120   | Card (2)     | Frost  | CC2V          | 1500             | 2700                       | 350                 | 1.3            | \$4.82                    | 3.63" |
| 03632      | 40                  | Med.      | 1,2       | 40B11/130        | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 345                 | 2.2            | \$4.82                    | 3.63" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

A15  
APPLIANCE  
LAMPS

| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code       | Volts | Package Type | Finish     | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------------|-------|--------------|------------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>A15</b> |                     |           |           |                     |       |              |            |               |                  |                            |                     |                |                           |       |
| 03995      | 15                  | Med.      | 1         | 15A15 2PK           | 120   | Box (2)      | Clear      | C9            | 2500             | 2700                       | 100                 | 2.2            | \$1.81                    | 3.38" |
| 03996      | 15                  | Med.      | 1         | 15A15/F 2PK         | 120   | Box (2)      | Frost      | C9            | 2500             | 2700                       | 90                  | 2.2            | \$1.81                    | 3.38" |
| 04503      | 15                  | Med.      | 1,2       | 15A15/F/130 2PK     | 130   | Box (2)      | Frost      | C9            | 2500             | 2700                       | 90                  | 2.2            | \$1.81                    | 3.38" |
| 03925      | 25                  | Med.      |           | 25A15 2PK           | 120   | Box (2)      | Clear      | C9            | 2500             | 2700                       | 175                 | 2.2            | \$3.01                    | 3.38" |
| 03929      | 25                  | Med.      | 1         | 25A15/F 2PK         | 120   | Box (2)      | Frost      | C9            | 2500             | 2700                       | 160                 | 2.2            | \$3.01                    | 3.38" |
| 03926      | 40                  | Med.      | 1         | 40A15 2PK           | 120   | Box (2)      | Clear      | C9            | 2500             | 2700                       | 350                 | 2.2            | \$4.82                    | 3.38" |
| 03930      | 40                  | Med.      | 1         | 40A15/F 2PK         | 120   | Box (2)      | Frost      | C9            | 2500             | 2700                       | 340                 | 2.2            | \$4.82                    | 3.38" |
| 04001      | 40                  | Med.      | 1         | 40A15               | 120   | Card         | Clear      | C9            | 2500             | 2700                       | 350                 | 2.2            | \$4.82                    | 3.38" |
| 04002      | 40                  | Med.      | 1         | 40A15/F             | 120   | Card         | Frost      | C9            | 2500             | 2700                       | 340                 | 2.2            | \$4.82                    | 3.38" |
| 04090      | 40                  | Med.      | 3         | 40A15/FAN           | 120   | Card         | Clear      | C9            | 2500             | 2700                       | 350                 | 2.2            | \$4.82                    | 3.38" |
| 04502      | 40                  | Med.      | 2         | 40A15/130 2PK       | 130   | Box (2)      | Clear      | C9            | 2500             | 2700                       | 350                 | 2.2            | \$4.82                    | 3.38" |
| 04504      | 40                  | Med.      | 1,2       | 40A15/F/130 2PK     | 130   | Box (2)      | Frost      | C9            | 2500             | 2700                       | 340                 | 2.2            | \$4.82                    | 3.38" |
| 03941      | 60                  | Cand.     | 3         | 60A15/CB/FAN 2CD    | 120   | Card (2)     | Clear      | C9            | 1500             | 2700                       | 570                 | 1.3            | \$7.23                    | 3.38" |
| 03943      | 60                  | Cand.     | 3         | 60A15/SW/CB/FAN 2CD | 120   | Card (2)     | Soft White | C9            | 1500             | 2700                       | 550                 | 1.3            | \$7.23                    | 3.38" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Canadian Standards Association 

3 Fan  
4 Non-Stick Base

www.westinghouselighting.com



# A19 LAMPS



| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>A19</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03935      | 25                  | Med.      |           | 25A/F 2PK     | 120   | Box (2)      | Frost  | CC6           | 1000             | 2700                       | 230                 | 0.9            | \$3.01                    | 4.13" |
| 03963      | 25                  | Med.      |           | 25A 4PK       | 120   | Box (4)      | Clear  | CC6           | 1000             | 2700                       | 230                 | 0.9            | \$3.01                    | 4.13" |
| 04100      | 25                  | Med.      | 2         | 25A/F/130 4PK | 130   | Box (4)      | Frost  | CC6           | 5000             | 2700                       | 205                 | 4.5            | \$3.01                    | 4.13" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# A19 SPECIALTY LAMPS



| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish            | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------|-------|--------------|-------------------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>A19</b> |                     |           |           |               |       |              |                   |               |                  |                            |                     |                |                           |       |
| 03443      | 25                  | Med.      |           | 25A/TA        | 120   | Box          | Transparent Amber | C9            | 2500             | -                          | -                   | 2.2            | \$3.01                    | 4.13" |
| 03444      | 25                  | Med.      |           | 25A/TG        | 120   | Box          | Transparent Green | C9            | 2500             | -                          | -                   | 2.2            | \$3.01                    | 4.13" |
| 03445      | 25                  | Med.      |           | 25A/TB        | 120   | Box          | Transparent Blue  | C9            | 2500             | -                          | -                   | 2.2            | \$3.01                    | 4.13" |
| 03446      | 25                  | Med.      |           | 25A/TR        | 120   | Box          | Transparent Red   | C9            | 2500             | -                          | -                   | 2.2            | \$3.01                    | 4.13" |
| 03452      | 60                  | Med.      |           | 60A/Y 2PK     | 120   | Box (2)      | Yellow Bug Light  | C9            | 1000             | -                          | -                   | 0.9            | \$7.23                    | 4.13" |
| 03951      | 100                 | Med. ✦    |           | 100A/TS/130   | 130   | Box          | Toughshell®       | CC6           | 4000             | 2700                       | 860                 | 3.6            | \$12.05                   | 4.13" |

✦ Shatter Resistant

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# A21, A23, PS30 AND 3-WAY LAMPS



| Item No.         | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code        | Volts | Package Type | Finish     | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------------|---------------------|-----------|-----------|----------------------|-------|--------------|------------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>A21</b>       |                     |           |           |                      |       |              |            |               |                  |                            |                     |                |                           |       |
| 03970            | 150                 | Med.      |           | 150A21               | 120   | Box          | Clear      | CC6           | 1000             | 2700                       | 2650                | 0.9            | \$18.07                   | 5.00" |
| <b>A23</b>       |                     |           |           |                      |       |              |            |               |                  |                            |                     |                |                           |       |
| 03972            | 200                 | Med.      |           | 200A23               | 120   | Box          | Clear      | CC6           | 750              | 2700                       | 3850                | 0.6            | \$24.09                   | 5.50" |
| <b>PS30</b>      |                     |           |           |                      |       |              |            |               |                  |                            |                     |                |                           |       |
| 03974            | 300                 | Med.      |           | 300PS30              | 120   | Box          | Clear      | C9            | 750              | 2850                       | 5870                | 0.6            | \$36.14                   | 8.00" |
| <b>A19 3-WAY</b> |                     |           |           |                      |       |              |            |               |                  |                            |                     |                |                           |       |
| 03908            | 30/70/100           | Med.      |           | 30/70/100A/SW        | 120   | Box          | Soft White | CC6           | 2000             | 2700                       | 275/950/1225        | 1.8            | \$12.05                   | 4.13" |
| <b>A21 3-WAY</b> |                     |           |           |                      |       |              |            |               |                  |                            |                     |                |                           |       |
| 03903            | 30/70/100           | Med.      |           | 30/70/100A21/SW      | 120   | Box          | Soft White | CC6           | 2000             | 2700                       | 275/950/1225        | 1.8            | \$12.05                   | 5.00" |
| 03904            | 50/100/150          | Med.      |           | 50/100/150A21/SW     | 120   | Box          | Soft White | CC6           | 2000             | 2700                       | 500/1350/1850       | 1.8            | \$18.07                   | 5.00" |
| 04548            | 50/100/150          | Med.      | 2         | 50/100/150A21/SW/130 | 130   | Box          | Soft White | CC6           | 2000             | 2700                       | 500/1350/1850       | 1.8            | \$18.07                   | 5.00" |

## Footnotes

1 Canadian Standards Association   
2 Commercial Service\*

3 Fan  
4 Non-Stick Base

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# G12½ AND G16½ LAMPS



| Item No.       | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code   | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|----------------|---------------------|-----------|-----------|-----------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>G12 1/2</b> |                     |           |           |                 |       |              |        |               |                  |                            |                     |                |                           |       |
| 03831          | 10                  | Cand.     |           | 10G12½/CB       | 120   | Box          | Clear  | C7A           | 1500             | 2700                       | 58                  | 1.3            | \$1.20                    | 2.25" |
| <b>G16 1/2</b> |                     |           |           |                 |       |              |        |               |                  |                            |                     |                |                           |       |
| 03822          | 25                  | Cand.     |           | 25G16½/CB       | 120   | Box          | Clear  | CC2V          | 1500             | 2700                       | 175                 | 1.3            | \$3.01                    | 2.75" |
| 03636          | 25                  | Cand.     | 2         | 25G16½/W/CB/130 | 130   | Box          | White  | CC2V          | 2500             | 2700                       | 155                 | 2.2            | \$3.01                    | 2.75" |
| 03816          | 40                  | Cand.     |           | 40G16½/W/CB     | 120   | Box          | White  | CC2V          | 1500             | 2700                       | 330                 | 1.3            | \$4.82                    | 2.75" |
| 03742          | 40                  | Cand.     |           | 40G16½/CB 2CD   | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 340                 | 1.3            | \$4.82                    | 2.75" |
| 03612          | 40                  | Cand.     | 2         | 40G16½/CB/130   | 130   | Box          | Clear  | CC2V          | 2500             | 2700                       | 340                 | 2.2            | \$4.82                    | 2.75" |
| 03745          | 60                  | Cand.     |           | 60G16½/CB 2CD   | 120   | Card (2)     | Clear  | CC2V          | 1500             | 2700                       | 610                 | 1.3            | \$7.23                    | 2.75" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# G25 LAMPS



| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish     | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------|-------|--------------|------------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>G25</b> |                     |           |           |               |       |              |            |               |                  |                            |                     |                |                           |       |
| 03119      | 40                  | Med.      | 1         | 40G25         | 120   | Box          | Clear      | C9            | 1500             | 2700                       | 365                 | 1.3            | \$4.82                    | 4.38" |
| 03122      | 40                  | Med.      | 1         | 40G25/W       | 120   | Box          | White      | C9            | 1500             | 2700                       | 340                 | 1.3            | \$4.82                    | 4.38" |
| 03156      | 40                  | Med.      |           | 40G25/CH      | 120   | Box          | 1/2 Chrome | C9            | 750              | 2700                       | -                   | 0.6            | \$4.82                    | 4.38" |
| 04219      | 40                  | Med.      | 1,2       | 40G25/130     | 130   | Box          | Clear      | C9            | 3500             | 2700                       | 320                 | 3.1            | \$4.82                    | 4.38" |
| 04222      | 40                  | Med.      | 1,2       | 40G25/W/130   | 130   | Box          | White      | C9            | 3500             | 2700                       | 290                 | 3.1            | \$4.82                    | 4.38" |
| 03157      | 60                  | Med.      |           | 60G25/CH      | 120   | Box          | 1/2 Chrome | C9            | 750              | 2700                       | -                   | 0.6            | \$7.23                    | 4.38" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# G40 LAMPS



| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>G40</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03102      | 60                  | Med.      |           | 60G40         | 120   | Box          | Clear  | CC6           | 2500             | 2700                       | 722                 | 2.2            | \$7.23                    | 6.75" |
| 03107      | 60                  | Med.      |           | 60G40/W       | 120   | Box          | White  | CC6           | 2500             | 2700                       | 650                 | 2.2            | \$7.23                    | 6.75" |
| 03108      | 100                 | Med.      |           | 100G40/W      | 120   | Box          | White  | CC6           | 2500             | 2700                       | 1221                | 2.2            | \$12.05                   | 6.75" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Canadian Standards Association

3 Fan  
4 Non-Stick Base

www.westinghouselighting.com

## REFLECTOR LAMPS



R20

BR30

BR40

| Item No.    | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Beam Type | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|-----------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>R20</b>  |                     |           |           |               |       |              |        |           |               |                  |                            |                     |                |                           |       |
| 04303       | 30                  | Med.      | 1         | 30R20/FL      | 120   | Box          | Frost  | Flood     | CC6           | 2000             | 2700                       | 215                 | 1.8            | \$3.61                    | 4.00" |
| (E) 03700   | 45                  | Med.      |           | 45R20/FL      | 120   | Box          | Frost  | Flood     | CC6           | 2000             | 2700                       | 380                 | 1.8            | \$5.42                    | 4.00" |
| <b>BR30</b> |                     |           |           |               |       |              |        |           |               |                  |                            |                     |                |                           |       |
| (E) 03646   | 65                  | Med.      | 1         | 65BR30/FL     | 120   | Box          | Frost  | Flood     | CC6           | 2000             | 2700                       | 650                 | 1.8            | \$7.83                    | 5.38" |
| (E) 05265   | 65                  | Med.      | 1         | 65BR30/FL 2PK | 120   | Box (2)      | Frost  | Flood     | CC6           | 2000             | 2700                       | 650                 | 1.8            | \$7.83                    | 5.38" |
| (E) 04235   | 65                  | Med.      | 1,2       | 65BR30/FL/130 | 130   | Box          | Frost  | Flood     | CC6           | 2000             | 2700                       | 650                 | 1.8            | \$7.83                    | 5.38" |
| (E) 04165   | 65                  | Med.      | 1,2       | 65BR30/FL/130 | 130   | Box          | Frost  | Flood     | CC6           | 2000             | 2700                       | 650                 | 1.8            | \$7.83                    | 5.38" |
| <b>BR40</b> |                     |           |           |               |       |              |        |           |               |                  |                            |                     |                |                           |       |
| (E) 03961   | 65                  | Med.      |           | 65BR40/FL     | 120   | Box          | Frost  | Flood     | CC6           | 2000             | 2700                       | 650                 | 1.8            | \$7.83                    | 6.50" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

(E)\* Means this bulb meets Federal minimum efficiency standards



HEAT LAMP

HEAT LAMP NON-STICK BASE

R40  
INFRARED HEAT LAMPS (SPLATTER RESISTANT)

| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Beam Type | Filament Type | Avg. Rated Hours | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|-----------|---------------|------------------|----------------|---------------------------|-------|
| <b>R40</b> |                     |           |           |               |       |              |        |           |               |                  |                |                           |       |
| 03918      | 125                 | Med.      |           | 125R40/HT     | 120   | Box          | Clear  | Flood     | C9            | 5000             | 4.5            | \$15.06                   | 6.50" |
| 03916      | 250                 | Med.      |           | 250R40/HT     | 120   | Box          | Clear  | Flood     | C9            | 5000             | 4.5            | \$30.11                   | 6.50" |
| 03484      | 250                 | Med.      | 4         | 250R40/HT/EZ  | 120   | Box          | Clear  | Flood     | C9            | 5000             | 4.5            | \$30.11                   | 6.50" |
| 03917      | 250                 | Med.      |           | 250R40/HT/R   | 120   | Box          | Red    | Flood     | C9            | 5000             | 4.5            | \$30.11                   | 6.50" |
| 03915      | 375                 | Med.      |           | 375R40/HT     | 120   | Box          | Clear  | Flood     | C9            | 5000             | 4.5            | \$45.17                   | 6.50" |

\*Based on 3hrs./day

\*\*Based on 3hrs./day 11¢/kWh



BUG LIGHT

RED

AMBER

GREEN

BR38  
INDOOR/OUTDOOR LAMPS

| Item No.    | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Beam Type | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|-----------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>BR38</b> |                     |           |           |               |       |              |        |           |               |                  |                            |                     |                |                           |       |
| 04409       | 100                 | Med.      |           | 100BR38/Y/FL  | 120   | Box          | Yellow | Flood     | C9            | 2000             | -                          | -                   | 1.8            | \$12.05                   | 5.75" |
| 04410       | 100                 | Med.      |           | 100BR38/R/FL  | 120   | Box          | Red    | Flood     | C9            | 2000             | -                          | -                   | 1.8            | \$12.05                   | 5.75" |
| 04411       | 100                 | Med.      |           | 100BR38/A/FL  | 120   | Box          | Amber  | Flood     | C9            | 2000             | -                          | -                   | 1.8            | \$12.05                   | 5.75" |
| 04413       | 100                 | Med.      |           | 100BR38/G/FL  | 120   | Box          | Green  | Flood     | C9            | 2000             | -                          | -                   | 1.8            | \$12.05                   | 5.75" |

## Footnotes

1 Canadian Standards Association   
2 Commercial Service\*

3 Fan  
4 Non-Stick Base

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## C7 LAMPS



| Item No.  | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-----------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>C7</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03601     | 4                   | Cand.     |           | 4C7/CB        | 120   | Box          | Clear  | C7A           | 3000             | 2700                       | 20                  | 2.7            | \$0.48                    | 2.11" |
| 03794     | 4                   | Cand.     |           | 4C7/CB 2CD    | 120   | Card (2)     | Clear  | C7A           | 3000             | 2700                       | 20                  | 2.7            | \$0.48                    | 2.11" |
| 03795     | 4                   | Cand.     |           | 4C7/W/CB 2CD  | 120   | Card (2)     | White  | C7A           | 3000             | 2700                       | 19                  | 2.7            | \$0.48                    | 2.11" |
| 04794     | 4                   | Cand.     |           | 4C7/CB 4CD    | 120   | Card (4)     | Clear  | C7A           | 3000             | 2700                       | 20                  | 2.7            | \$0.48                    | 2.11" |
| 04795     | 4                   | Cand.     |           | 4C7/W/CB 4CD  | 120   | Card (4)     | White  | C7A           | 3000             | 2700                       | 19                  | 2.7            | \$0.48                    | 2.11" |
| 03691     | 7                   | Cand.     |           | 7C7/CB        | 120   | Box          | Clear  | C7A           | 3000             | 2700                       | 45                  | 2.7            | \$0.84                    | 2.11" |
| 03791     | 7                   | Cand.     |           | 7C7/CB 2CD    | 120   | Card (2)     | Clear  | C7A           | 3000             | 2700                       | 45                  | 2.7            | \$0.84                    | 2.11" |
| 03792     | 7                   | Cand.     |           | 7C7/W/CB 2CD  | 120   | Card (2)     | White  | C7A           | 3000             | 2700                       | 35                  | 2.7            | \$0.84                    | 2.11" |
| 37202     | 7                   | Cand.     |           | 7C7/CB 4CD    | 120   | Card (4)     | Clear  | C7A           | 4000             | 2700                       | 43                  | 3.6            | \$0.84                    | 2.11" |
| 37206     | 7                   | Cand.     |           | 7C7/W/CB 4CD  | 120   | Card (4)     | White  | C7A           | 4000             | 2700                       | 34                  | 3.6            | \$0.84                    | 2.11" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

S6, S11  
AND S14 LAMPS

| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>S6</b>  |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 04025      | 6                   | Cand.     |           | 6S6/CB 2CD    | 120   | Card (2)     | Clear  | C7A           | 1500             | 2700                       | 32                  | 1.3            | \$0.72                    | 1.88" |
| 04525      | 6                   | Cand.     | 2         | 6S6/CB/130    | 130   | Box          | Clear  | C7A           | 1500             | 2700                       | 32                  | 1.3            | \$0.72                    | 1.88" |
| <b>S11</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 04064      | 7.5                 | Med.      |           | 7.5S11        | 120   | Card         | Clear  | C7A           | 1500             | 2700                       | 53                  | 1.3            | \$0.90                    | 2.25" |
| 04065      | 7.5                 | Med.      |           | 7.5S11/W      | 120   | Card         | White  | C7A           | 1500             | 2700                       | 39                  | 1.3            | \$0.90                    | 2.25" |
| 04067      | 7.5                 | Med.      |           | 7.5S11/R      | 120   | Card         | Red    | C7A           | 2500             | -                          | -                   | 2.2            | \$0.90                    | 2.25" |
| 04564      | 7.5                 | Med.      |           | 7.5S11/130    | 130   | Box          | Clear  | C7A           | 2500             | 2700                       | 52                  | 2.2            | \$0.90                    | 2.25" |
| 03568      | 10                  | Inter.    |           | 10S11/IN/130  | 130   | Card         | Clear  | C7A           | 2500             | 2700                       | 80                  | 2.2            | \$1.20                    | 2.25" |
| 03534      | 25                  | Inter.    |           | 25S11/IN      | 120   | Card         | Clear  | CC2V          | 1000             | 2700                       | 180                 | 0.9            | \$3.01                    | 2.25" |
| 03729      | 40                  | Inter.    |           | 40S11/IN      | 120   | Card         | Clear  | CC2V          | 1000             | 2700                       | 355                 | 0.9            | \$4.82                    | 2.25" |
| <b>S14</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 04340      | 11                  | Med.      |           | 11S14/130     | 130   | Box          | Clear  | C9            | 2500             | 2700                       | 63                  | 2.2            | \$1.32                    | 3.38" |
| 03540      | 11                  | Med.      |           | 11S14/130     | 130   | Card         | Clear  | C9            | 2500             | 2700                       | 63                  | 2.2            | \$1.32                    | 3.38" |
| 03541      | 11                  | Med.      |           | 11S14/F/130   | 130   | Card         | Frost  | C9            | 2500             | 2700                       | 60                  | 2.2            | \$1.32                    | 3.38" |

## Footnotes

1 Canadian Standards Association 

2 Commercial Service\*

3 Fan  
4 Non-Stick Base

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# T4 AND T6 LAMPS




| Item No.  | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-----------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>T4</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03226     | 15                  | Cand.     |           | 15T4/CB       | 120   | Card         | Clear  | C5            | 1000             | 2700                       | 100                 | 0.9            | \$1.81                    | 1.75" |
| <b>T6</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03723     | 15                  | Cand.     |           | 15T6/F/CB     | 120   | Card         | Frost  | C7A           | 1000             | 2700                       | 89                  | 0.9            | \$1.81                    | 3.00" |
| 03882     | 15                  | Cand.     |           | 15T6/CB/130   | 130   | Box          | Clear  | C7A           | 1500             | 2700                       | 100                 | 1.3            | \$1.81                    | 3.00" |
| 03883     | 15                  | Cand.     |           | 15T6/CB/145   | 145   | Box          | Clear  | C7A           | 1500             | 2700                       | 100                 | 1.3            | \$1.81                    | 3.00" |
| 03583     | 15                  | Cand.     |           | 15T6/CB/145   | 145   | Card         | Clear  | C7A           | 1500             | 2700                       | 100                 | 1.3            | \$1.81                    | 3.00" |
| 03220     | 25                  | Cand.     |           | 25T6/CB       | 120   | Box          | Clear  | C7A           | 1500             | 2700                       | 190                 | 1.3            | \$3.01                    | 3.00" |
| 03520     | 25                  | Cand.     |           | 25T6/CB       | 120   | Card         | Clear  | C7A           | 1500             | 2700                       | 190                 | 1.3            | \$3.01                    | 3.00" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# T6½ LAMPS



| Item No.      | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code    | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------|---------------------|-----------|-----------|------------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>T6 1/2</b> |                     |           |           |                  |       |              |        |               |                  |                            |                     |                |                           |       |
| 04316         | 20                  | Inter.    |           | 20T6½/IN/130     | 130   | Box          | Clear  | C8            | 3000             | 2600                       | 100                 | 2.7            | \$2.41                    | 5.38" |
| 04319         | 20                  | Inter.    |           | 20T6½/2/F/IN/130 | 130   | Box          | Frost  | C8            | 3000             | 2700                       | 90                  | 2.7            | \$2.41                    | 5.38" |
| 03707         | 40                  | Inter.    |           | 40T6½/2/IN       | 120   | Card         | Clear  | C8            | 1000             | 2700                       | 250                 | 0.9            | \$4.82                    | 5.38" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

# T7 AND T7½ LAMPS



| Item No.      | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|---------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>T7</b>     |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03720         | 15                  | Cand.     |           | 15T7/CB       | 120   | Card         | Clear  | C5            | 1000             | 2700                       | 108                 | 0.9            | \$1.81                    | 2.19" |
| 03721         | 15                  | Inter.    |           | 15T7/IN       | 120   | Card         | Clear  | C5            | 1000             | 2700                       | 108                 | 0.9            | \$1.81                    | 2.19" |
| 03722         | 15                  | D.C. Bay  |           | 15T7/DC       | 120   | Card         | Clear  | C5            | 1000             | 2700                       | 108                 | 0.9            | \$1.81                    | 2.19" |
| <b>T7 1/2</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03521         | 35                  | Cand.     |           | 35T7½/2/CB    | 120   | Card         | Clear  | C5            | 1500             | 2700                       | 190                 | 1.3            | \$4.22                    | 3.56" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Canadian Standards Association   
2 Commercial Service\*

3 Fan  
4 Non-Stick Base

## T8 LAMPS



| Item No.  | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL    |
|-----------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|--------|
| <b>T8</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |        |
| 03716     | 25                  | Inter.    |           | 25T8/IN       | 120   | Card         | Clear  | C5            | 1000             | 2700                       | 195                 | 0.9            | \$3.01                    | 2.56"  |
| 03717     | 25                  | D.C. Bay  |           | 25T8/DC       | 120   | Card         | Clear  | C5            | 1000             | 2700                       | 195                 | 0.9            | \$3.01                    | 2.56"  |
| 03719     | 40                  | Inter.    |           | 40T8/IN       | 120   | Card         | Clear  | C7A           | 1000             | 2700                       | 365                 | 0.9            | \$4.82                    | 2.56"  |
| 03892     | 40                  | Med.      |           | 40T8/130      | 130   | Box          | Clear  | C8            | 3500             | 2700                       | 300                 | 3.1            | \$4.82                    | 11.50" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh



## T10 LAMPS

| Item No.   | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|------------|---------------------|-----------|-----------|---------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>T10</b> |                     |           |           |               |       |              |        |               |                  |                            |                     |                |                           |       |
| 03710      | 25                  | Med.      |           | 25T10         | 120   | Card         | Clear  | C5V           | 1000             | 2700                       | 180                 | 0.9            | \$3.01                    | 5.13" |
| 03713      | 25                  | Med.      |           | 25T10/F       | 120   | Card         | Frost  | C5V           | 1000             | 2700                       | 170                 | 0.9            | \$3.01                    | 5.13" |
| 03711      | 40                  | Med.      |           | 40T10         | 120   | Card         | Clear  | C5V           | 1000             | 2700                       | 300                 | 0.9            | \$4.82                    | 5.13" |
| 03714      | 40                  | Med.      |           | 40T10/F       | 120   | Card         | Frost  | C5V           | 1000             | 2700                       | 285                 | 0.9            | \$4.82                    | 5.13" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## LOW VOLTAGE LAMPS

| Item No.  | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code        | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-----------|---------------------|-----------|-----------|----------------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>S8</b> |                     |           |           |                      |       |              |        |               |                  |                            |                     |                |                           |       |
| 03726     | 12                  | S.C. Bay. |           | 12S8/93T/SC/12V 2CD  | 12    | Card (2)     | Clear  | C6            | 700              | 2700                       | 120                 | 0.6            | \$1.45                    | 2.00" |
| 03727     | 21                  | S.C. Bay. |           | 21S8/1073/SC/12V 2CD | 12    | Card (2)     | Clear  | C6            | 700              | 2700                       | 255                 | 0.6            | \$2.53                    | 2.00" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

VINTAGE  
INSPIRED LAMPS

| Item No.    | Energy Used (Watts) | Lamp Base | Footnotes | Domestic Code   | Volts | Package Type | Finish | Filament Type | Avg. Rated Hours | Color Temperature (Kelvin) | Brightness (Lumens) | Life in Years* | Est. Yearly Energy Cost** | MOL   |
|-------------|---------------------|-----------|-----------|-----------------|-------|--------------|--------|---------------|------------------|----------------------------|---------------------|----------------|---------------------------|-------|
| <b>A19</b>  |                     |           |           |                 |       |              |        |               |                  |                            |                     |                |                           |       |
| 04135       | 60                  | Med.      |           | VINTAGE/60/A19  | 120   | Card         | Clear  | NX-8          | 1500             | 2200                       | 275                 | 1.3            | \$7.23                    | 4.13" |
| <b>ST20</b> |                     |           |           |                 |       |              |        |               |                  |                            |                     |                |                           |       |
| 04120       | 40                  | Med.      |           | VINTAGE/40/ST20 | 120   | Card         | Clear  | 19-ANCHOR     | 1500             | 2200                       | 160                 | 1.3            | \$4.82                    | 5.51" |
| 04132       | 60                  | Med.      |           | VINTAGE/60/ST20 | 120   | Card         | Clear  | 19-ANCHOR     | 1500             | 2200                       | 305                 | 1.3            | \$7.23                    | 5.51" |
| <b>T12</b>  |                     |           |           |                 |       |              |        |               |                  |                            |                     |                |                           |       |
| 04129       | 60                  | Med.      |           | VINTAGE/60/T12  | 120   | Card         | Clear  | 12-ANCHOR     | 1500             | 2200                       | 120                 | 1.3            | \$7.23                    | 4.25" |

\*Based on 3hrs./day

\*\*Based on operating 3hrs./day 11¢/kWh

## Footnotes

1 Canadian Standards Association 

3 Fan  
4 Non-Stick Base

www.westinghouselighting.com

| ITEM# | PAGE# | ITEM# | PAGE# | ITEM# | PAGE# | ITEM# | PAGE# |
|-------|-------|-------|-------|-------|-------|-------|-------|
| 03018 | 27    | 03520 | 34    | 03722 | 34    | 03926 | 29    |
| 03019 | 27    | 03521 | 34    | 03723 | 34    | 03929 | 29    |
| 03025 | 27    | 03529 | 22    | 03726 | 35    | 03930 | 29    |
| 03102 | 31    | 03534 | 33    | 03727 | 35    | 03935 | 30    |
| 03107 | 31    | 03540 | 33    | 03729 | 33    | 03941 | 29    |
| 03108 | 31    | 03541 | 33    | 03732 | 29    | 03943 | 29    |
| 03119 | 31    | 03568 | 33    | 03734 | 29    | 03951 | 30    |
| 03122 | 31    | 03583 | 34    | 03735 | 29    | 03961 | 32    |
| 03152 | 10    | 03601 | 33    | 03742 | 31    | 03963 | 30    |
| 03153 | 10    | 03612 | 31    | 03745 | 31    | 03970 | 30    |
| 03154 | 10    | 03632 | 29    | 03747 | 27    | 03972 | 30    |
| 03156 | 31    | 03636 | 31    | 03755 | 28    | 03974 | 30    |
| 03157 | 31    | 03646 | 32    | 03756 | 27    | 03995 | 29    |
| 03197 | 13    | 03656 | 27    | 03762 | 28    | 03996 | 29    |
| 03198 | 13    | 03662 | 28    | 03765 | 28    | 04001 | 29    |
| 03220 | 34    | 03664 | 28    | 03774 | 28    | 04002 | 29    |
| 03226 | 34    | 03670 | 28    | 03775 | 28    | 04023 | 28    |
| 03230 | 28    | 03671 | 28    | 03777 | 28    | 04025 | 33    |
| 03232 | 29    | 03673 | 28    | 03782 | 28    | 04027 | 29    |
| 03235 | 29    | 03674 | 28    | 03783 | 28    | 04031 | 23    |
| 03241 | 28    | 03675 | 28    | 03784 | 29    | 04034 | 27    |
| 03242 | 28    | 03679 | 28    | 03791 | 33    | 04051 | 20    |
| 03250 | 27    | 03681 | 28    | 03792 | 33    | 04052 | 20    |
| 03262 | 28    | 03682 | 28    | 03794 | 33    | 04064 | 33    |
| 03273 | 28    | 03683 | 28    | 03795 | 33    | 04065 | 33    |
| 03274 | 28    | 03684 | 29    | 03816 | 31    | 04067 | 33    |
| 03275 | 28    | 03687 | 29    | 03822 | 31    | 04090 | 29    |
| 03278 | 28    | 03691 | 33    | 03831 | 31    | 04100 | 30    |
| 03282 | 28    | 03700 | 32    | 03882 | 34    | 04120 | 35    |
| 03283 | 28    | 03707 | 34    | 03883 | 34    | 04129 | 35    |
| 03284 | 29    | 03710 | 35    | 03892 | 35    | 04132 | 35    |
| 03285 | 28    | 03711 | 35    | 03903 | 30    | 04135 | 35    |
| 03336 | 27    | 03713 | 35    | 03904 | 30    | 04165 | 32    |
| 03443 | 30    | 03714 | 35    | 03908 | 30    | 04219 | 31    |
| 03444 | 30    | 03716 | 35    | 03915 | 32    | 04222 | 31    |
| 03445 | 30    | 03717 | 35    | 03916 | 32    | 04235 | 32    |
| 03446 | 30    | 03719 | 35    | 03917 | 32    | 04303 | 32    |
| 03452 | 30    | 03720 | 34    | 03918 | 32    | 04316 | 34    |
| 03484 | 32    | 03721 | 34    | 03925 | 29    | 04319 | 34    |



| ITEM# | PAGE# | ITEM# | PAGE# | ITEM# | PAGE# | ITEM# | PAGE# |
|-------|-------|-------|-------|-------|-------|-------|-------|
| 04340 | 33    | 04736 | 22    | 04855 | 23    | 31056 | 15    |
| 04409 | 32    | 04738 | 22    | 04870 | 23    | 33067 | 12    |
| 04410 | 32    | 04739 | 22    | 04871 | 23    | 33147 | 12    |
| 04411 | 32    | 04740 | 22    | 04879 | 23    | 33149 | 12    |
| 04413 | 32    | 04741 | 22    | 04889 | 23    | 33151 | 12    |
| 04423 | 23    | 04742 | 22    | 04901 | 23    | 33159 | 11    |
| 04436 | 22    | 04743 | 22    | 04973 | 24    | 33163 | 11    |
| 04438 | 22    | 04745 | 22    | 04974 | 24    | 33185 | 14    |
| 04442 | 22    | 04746 | 23    | 04976 | 24    | 33187 | 14    |
| 04444 | 22    | 04748 | 21    | 04978 | 24    | 33191 | 8     |
| 04456 | 21    | 04749 | 21    | 05012 | 26    | 33193 | 5     |
| 04470 | 23    | 04753 | 22    | 05013 | 26    | 33199 | 13    |
| 04502 | 29    | 04750 | 21    | 05017 | 26    | 33491 | 11    |
| 04503 | 29    | 04755 | 21    | 05018 | 26    | 33638 | 11    |
| 04504 | 29    | 04756 | 21    | 05106 | 28    | 35152 | 11    |
| 04525 | 33    | 04758 | 21    | 05107 | 28    | 35153 | 11    |
| 04548 | 30    | 04759 | 24    | 05161 | 13    | 35156 | 9     |
| 04559 | 21    | 04761 | 21    | 05265 | 32    | 35162 | 18    |
| 04563 | 21    | 04764 | 23    | 05401 | 25    | 35163 | 18    |
| 04564 | 33    | 04765 | 21    | 06204 | 26    | 35164 | 18    |
| 04586 | 21    | 04766 | 21    | 06209 | 22    | 35165 | 18    |
| 04706 | 23    | 04767 | 23    | 06210 | 23    | 35166 | 18    |
| 04710 | 23    | 04768 | 23    | 06211 | 22    | 35171 | 5     |
| 04711 | 22    | 04770 | 23    | 06212 | 21    | 35172 | 5     |
| 04712 | 23    | 04771 | 21    | 06213 | 21    | 35173 | 9     |
| 04713 | 23    | 04773 | 24    | 06214 | 21    | 35174 | 11    |
| 04714 | 23    | 04774 | 24    | 06215 | 26    | 35180 | 18    |
| 04715 | 23    | 04775 | 24    | 06216 | 22    | 35181 | 18    |
| 04716 | 23    | 04777 | 24    | 06240 | 22    | 35188 | 7     |
| 04717 | 23    | 04779 | 24    | 06242 | 24    | 36800 | 26    |
| 04719 | 23    | 04781 | 21    | 06243 | 24    | 36801 | 26    |
| 04721 | 23    | 04783 | 24    | 06244 | 24    | 36832 | 26    |
| 04722 | 23    | 04784 | 24    | 06245 | 24    | 36834 | 26    |
| 04723 | 23    | 04786 | 24    | 06251 | 24    | 36836 | 25    |
| 04725 | 22    | 04787 | 22    | 06252 | 24    | 36837 | 25    |
| 04730 | 22    | 04788 | 24    | 06254 | 24    | 36838 | 25    |
| 04731 | 22    | 04794 | 33    | 06255 | 24    | 36841 | 25    |
| 04734 | 22    | 04795 | 33    | 31053 | 15    | 36842 | 25    |
| 04735 | 22    | 04835 | 23    | 31055 | 15    | 36843 | 25    |

| ITEM# | PAGE# | ITEM# | PAGE# | ITEM#     | PAGE# | ITEM# | PAGE# |
|-------|-------|-------|-------|-----------|-------|-------|-------|
| 36844 | 25    | 45119 | 13    | 50300     | 19    | 51331 | 9     |
| 36845 | 25    | 45120 | 13    | 50380     | 19    | 51341 | 9     |
| 36846 | 25    | 45124 | 8     | 50440     | 20    | 51351 | 6     |
| 36847 | 25    | 45129 | 8     | 50550     | 15    | 51361 | 6     |
| 36848 | 25    | 45131 | 10    | 50560     | 15    | 51401 | 15    |
| 36849 | 25    | 45134 | 8     | 50570     | 18    | 51411 | 15    |
| 36850 | 25    | 45136 | 8     | 50591     | 5     | 51421 | 20    |
| 36851 | 25    | 45138 | 9     | 50621     | 5     | 51431 | 20    |
| 36854 | 25    | 45140 | 9     | 50691     | 8     | 51441 | 20    |
| 36859 | 25    | 45141 | 9     | 50701     | 8     | 51450 | 12    |
| 36861 | 25    | 45148 | 11    | 50741     | 9     | 51470 | 14    |
| 36870 | 26    | 45154 | 11    | 50750     | 9     | 51480 | 14    |
| 36873 | 26    | 45157 | 9     | 50760     | 9     | 51490 | 14    |
| 37202 | 33    | 45160 | 9     | 50771     | 9     | 51500 | 14    |
| 37206 | 33    | 45167 | 18    | 50790     | 9     | 51510 | 14    |
| 41040 | 15    | 45182 | 6     | 50801     | 20    | 51520 | 14    |
| 41041 | 15    | 45183 | 6     | 50811     | 9     | 51531 | 20    |
| 41043 | 15    | 45184 | 7     | 50820     | 15    | 51540 | 18    |
| 41044 | 15    | 45185 | 7     | 50830     | 15    | 51551 | 20    |
| 41045 | 15    | 45186 | 6     | 50840     | 15    | 51561 | 20    |
| 41046 | 15    | 45187 | 6     | 50850     | 15    | 51571 | 20    |
| 43045 | 8     | 50000 | 12    | 50940     | 9     | 51580 | 7     |
| 43166 | 6     | 50010 | 12    | 509506913 | 16    | 51590 | 10    |
| 43168 | 5     | 50020 | 12    | 509506931 | 16    | 51600 | 10    |
| 43169 | 5     | 50051 | 12    | 50951     | 16    | 51631 | 14    |
| 43170 | 5     | 50061 | 12    | 509516931 | 16    | 51641 | 14    |
| 43171 | 5     | 50071 | 12    | 50971     | 16    | 51671 | 6     |
| 43172 | 6     | 50081 | 11    | 51030     | 16    | 51680 | 7     |
| 43173 | 6     | 50110 | 11    | 510306913 | 16    | 51691 | 6     |
| 43184 | 14    | 50120 | 11    | 51047     | 15    | 51700 | 10    |
| 43440 | 9     | 50140 | 11    | 51048     | 15    | 51710 | 10    |
| 43697 | 9     | 50163 | 6     | 51071     | 16    | 51720 | 18    |
| 43788 | 20    | 50172 | 6     | 51091     | 16    | 51730 | 18    |
| 43789 | 20    | 50182 | 6     | 51111     | 16    | 51800 | 12    |
| 45112 | 13    | 50231 | 6     | 51130     | 5     | 51820 | 13    |
| 45113 | 13    | 50242 | 6     | 51170     | 10    | 51830 | 9     |
| 45114 | 13    | 50251 | 20    | 51181     | 19    | 51840 | 9     |
| 45117 | 13    | 50260 | 20    | 51190     | 19    | 51850 | 9     |
| 45118 | 13    | 50280 | 20    | 51321     | 9     | 51940 | 7     |

| ITEM#     | PAGE# | ITEM# | PAGE# | ITEM# | PAGE# | ITEM# | PAGE# |
|-----------|-------|-------|-------|-------|-------|-------|-------|
| 51951     | 9     | 53011 | 10    |       |       |       |       |
| 51970     | 9     | 53012 | 12    |       |       |       |       |
| 51980     | 16    | 53032 | 11    |       |       |       |       |
| 51990     | 16    | 53050 | 11    |       |       |       |       |
| 52000     | 16    | 53064 | 11    |       |       |       |       |
| 52011     | 16    | 53110 | 12    |       |       |       |       |
| 52021     | 16    | 53114 | 12    |       |       |       |       |
| 52050     | 16    | 53127 | 9     |       |       |       |       |
| 520506913 | 16    | 53128 | 10    |       |       |       |       |
| 52070     | 5     | 53129 | 10    |       |       |       |       |
| 52100     | 5     | 53130 | 8     |       |       |       |       |
| 52110     | 5     | 53132 | 8     |       |       |       |       |
| 52120     | 17    | 53140 | 9     |       |       |       |       |
| 52130     | 17    | 53141 | 8     |       |       |       |       |
| 52140     | 17    | 53158 | 9     |       |       |       |       |
| 52150     | 17    | 53161 | 11    |       |       |       |       |
| 52160     | 16    | 53164 | 6     |       |       |       |       |
| 52171     | 16    | 53165 | 6     |       |       |       |       |
| 52180     | 16    | 53175 | 6     |       |       |       |       |
| 52190     | 16    | 53178 | 6     |       |       |       |       |
| 52200     | 11    | 53189 | 9     |       |       |       |       |
| 52210     | 11    | 53190 | 9     |       |       |       |       |
| 52220     | 14    | 53739 | 20    |       |       |       |       |
| 52230     | 17    | 53852 | 20    |       |       |       |       |
| 522306914 | 17    | 55108 | 13    |       |       |       |       |
| 522306916 | 17    | 55109 | 13    |       |       |       |       |
| 522306917 | 17    | 55110 | 13    |       |       |       |       |
| 522306930 | 17    | 55111 | 13    |       |       |       |       |
| 52240     | 6     | 55115 | 13    |       |       |       |       |
| 52250     | 19    | 55116 | 13    |       |       |       |       |
| 52260     | 16    | 55145 | 9     |       |       |       |       |
| 52270     | 16    |       |       |       |       |       |       |
| 52280     | 9     |       |       |       |       |       |       |
| 52290     | 9     |       |       |       |       |       |       |
| 52300     | 9     |       |       |       |       |       |       |
| 52310     | 20    |       |       |       |       |       |       |
| 52320     | 20    |       |       |       |       |       |       |
| 52330     | 20    |       |       |       |       |       |       |
| 53000     | 11    |       |       |       |       |       |       |







Call 1-800-999-2226 or visit [www.westinghouselighting.com](http://www.westinghouselighting.com).

® and Westinghouse are trademarks of Westinghouse Electric Corporation.  
Used under license by Westinghouse Lighting. All Rights Reserved.