



LED Program



WESTINGHOUSE LIGHTING

LED HIGHLIGHTS

NEW! UPDATED TECHNOLOGY LED PL AND DECORATIVE LAMPS

Our direct install HPL LED lamp features an adjustable base that fits 4-pin G24q and GX24q sockets without rewiring. A suitable replacement for 13W, 18W, 26W, 32W, and 42W CFL PL lamps in hospitality and retail applications, dimmable when used with an applicable ballast.

Our decorative filament CA11 lamp radiates soft white light to enhance chandeliers, sconces, vintage-style fixtures, and outdoor-rated fixtures that require candelabra base bulbs. In addition, the lamp is fully dimmable, with a clear finish, perfect for open-fixture designs.



GET THE PERFECT LOOK USING SLIM RECESSED DOWNLIGHTS WITH COLOR SELECTION

Featuring a slim profile, our all-in-one, labor-saving recessed LED downlight is perfect for applications with shallow ceilings or recessed spaces. Easy to install, this ENERGY STAR rated, 8" diameter downlight is available in multiple Kelvins. Select between 2700K, 3000K, 3500K, 4000K, and 5000K with the touch of a switch during installation. Choose warm white, cool white, or daylight for the perfect light appearance. This downlight is also dimmable and approved for wet locations.



TLED BALLAST BYPASS DIMMER MODULE

The Commercial Service LED ballast bypass dimming module works in conjunction with a 0-10v commercial dimmer, and our ballast bypass TLED lamps to make them dimmable. The dimmer input connects to the building power supply, and the dimmer output wires go to the dimming module. The output from the dimming module connects to the ballast bypass lamp. One dimming module is required per lamp. This module comes complete with 25 inches of flexible metal conduit at the input and output of the module. You can find compatible TLED lamps listed in this brochure.



Visit www.westinghouselighting.com for our complete assortment of LED lamps, light fixtures, ceiling fans and accessories.

All LED lamps in this brochure are shown unlit.
All LED lamps are approved for use in damp locations unless otherwise noted.



DECORATIVE
FILAMENT LAMPS
LAMPS SHOWN UNLIT



B11 CLEAR



CA11 CLEAR



F15 CLEAR

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
B11 DECORATIVE															
50591	2.5	Cand.	2,4,7	2.5B11/FilamentLED/DIM/CL/CB/27	Box	25	Warm White	Clear	2700	80	200	15000	13.6	\$0.30	3.82"
35171	4	Cand.	2,4,7	4B11/FilamentLED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	80	300	15000	13.6	\$0.48	3.82"
50621	4.5	Cand.	2,4,7	4.5B11/FilamentLED/DIM/CL/CB/27 2CD	Card (2)	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	3.82"
43168	4.5	Cand.	2,4,7	4.5B11/FilamentLED/DIM/CL/CB/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	3.82"
43169	4.5	Med.	2,4,7	4.5B11/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	3.58"
CA11 DECORATIVE															
35172	4	Cand.	2,4,7	4CA11/FilamentLED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	80	300	15000	13.6	\$0.48	3.82"
51130	4	Med.	2,4,7	4CA11/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	365	15000	13.6	\$0.48	4.22"
53170	4.5	Cand.	1,2,4,7	4.5CA11/FilamentLED/DIM/CL/CB/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	4.29"
43171	4.5	Med.	2,4,7	4.5CA11/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	4.13"
F15															
33193	2.5	Med.	2,4,7	2.5F15/FilamentLED/DIM/CL/27 1CD	Card	25	Warm White	Clear	2700	80	250	15000	13.6	\$0.30	4.33"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

DECORATIVE
GLOWESCENT® LAMPS (SPUN SATIN)
LAMPS SHOWN UNLIT



C11 WHITE



H19 WHITE

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
C11 DECORATIVE															
52070	4.5	Cand.	2,4,7	4.5C11/GlowescentLED/DIM/WH/CB/27	Box	60	Warm White	White	2700	80	480	15000	13.6	\$0.54	3.86"
H19 DECORATIVE															
52110	7.5	Med.	2,4,7	7.5H19/GlowescentLED/DIM/WH/27	Box	75	Warm White	White	2700	80	800	15000	13.6	\$0.90	5.79"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- 1 New Item
2 Dimmable

- 3 Low Voltage (12V)
4 Approved for Damp Location

- 5 Approved for Wet Location
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures



FILAMENT
LAMPS
LAMPS SHOWN UNLIT



Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
A15															
43166	4.5	Med.	2,4,7	4.5A15/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	470	15000	13.6	\$0.54	3.30"
A19															
53164	4.5	Med.	2,4,7	4.5A19/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	470	15000	13.6	\$0.54	4.13"
51351	4.5	Med.	2,4,7	4.5A19/FilamentLED/DIM/CL/27 2PK	Box (2)	40	Warm White	Clear	2700	80	470	15000	13.6	\$0.54	4.13"
53165	6.5	Med.	2,4,7	6.5A19/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	4.13"
51361	6.5	Med.	2,4,7	6.5A19/FilamentLED/DIM/CL/27 2PK	Box (2)	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	4.13"
50163	6.5	Med.	2,4,7	6.5A19/FilamentLED/DIM/SW/27	Box	60	Warm White	Soft White	2700	80	810	15000	13.6	\$0.78	4.13"
52240	9	Med.	2,4,7	9A19/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	800	15000	13.6	\$1.08	4.17"
51671	10	Med.	2,4,7	10A19/FilamentLED/DIM/CL/27	Box	75	Warm White	Clear	2700	80	1100	15000	13.6	\$1.20	4.13"
G16.5 GLOBE															
50232	3.8	Cand.	2,4,7	3.8G16.5/FilamentLED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	80	350	15000	13.6	\$0.46	3.23"
50242	4.5	Cand.	2,4,7	4.5G16.5/FilamentLED/DIM/CL/CB/27	Box	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	3.23"
G25 GLOBE															
51691	4.5	Med.	2,4,7	4.5G25/FilamentLED/DIM/CH/27	Box	40	Warm White	Half Chrome	2700	80	400	15000	13.6	\$0.54	4.72"
43172	5.5	Med.	2,4,7	5.5G25/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	500	15000	13.6	\$0.66	4.52"
50172	5.5	Med.	2,4,7	5.5G25/FilamentLED/DIM/SW/27	Box	40	Warm White	Soft White	2700	80	500	15000	13.6	\$0.66	4.52"
50182	6.5	Med.	2,4,7	6.5G25/FilamentLED/DIM/SW/27	Box	60	Warm White	Soft White	2700	80	810	15000	13.6	\$0.78	4.52"
53173	6.5	Med.	2,4,7	6.5G25/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	4.52"
G40 GLOBE															
53175	6.5	Med.	2,4,7	6.5G40/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	6.57"
ST15															
45186	4.5	Med.	2,4,7	4.5ST15/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	470	15000	13.6	\$0.54	4.65"
45187	6.5	Med.	2,4,7	6.5ST15/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	800	15000	13.6	\$0.78	4.65"
ST20															
45182	4.5	Med.	2,4,7	4.5ST20/FilamentLED/DIM/CL/27	Box	40	Warm White	Clear	2700	80	500	15000	13.6	\$0.54	5.43"
45183	6.5	Med.	2,4,7	6.5ST20/FilamentLED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	810	15000	13.6	\$0.78	5.43"
53178	6.5	Med.	2,4,7	6.5ST20/FilamentLED/DIM/A/22	Box	60	Warm White	Amber	2200	80	630	15000	13.6	\$0.78	5.43"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- 1 New Item
2 Dimmable

- 3 Low Voltage (12V)
4 Approved for Damp Location

- 5 Approved for Wet Location
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures

FILAMENT T LAMPS

LAMPS SHOWN UNLIT



Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
T6 & T6.5															
51580	2.5	Cand.	2,4,7	2.5T6/FilamentLED/DIM/CL/CB/27	Box	25	Warm White	Clear	2700	80	200	15000	13.6	\$0.30	3.15"
51940	4	Inter.	2,4,7	4T6.5/FilamentLED/DIM/CL/IN/27	Box	40	Warm White	Clear	2700	80	350	15000	13.6	\$0.48	4.65"
51680	4.5	Cand.	2,4,7	4.5T6/FilamentLED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	80	450	15000	13.6	\$0.54	3.27"
T9															
45184	4.5	Med.	2,4,7	4.5T9/FilamentLED/DIM/CL/27 1CD	Card	60	Warm White	Clear	2700	80	450	15000	13.6	\$0.54	7.10"
35188	6.5	Med.	2,4,7	6.5T9/FilamentLED/DIM/CL/27 1CD	Card	75	Warm White	Clear	2700	80	800	15000	13.6	\$0.78	11.97"
T10															
45185	3.5	Med.	2,4,7	3.5T10/FilamentLED/DIM/CL/27 1CD	Card	60	Warm White	Clear	2700	80	350	15000	13.6	\$0.42	4.92"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- 1 New Item
- 2 Dimmable

- 3 Low Voltage (12V)
- 4 Approved for Damp Location

- 5 Approved for Wet Location
- 6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures



B11



B13



C11



C13

DECORATIVE LAMPS

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
TORPEDO															
43045	2.8	Cand.	2,4,7	2.8B11/LED/DIM/CL/CB/30	Hanging Box	25	Warm White	Clear	3000	80	160	25000	22.8	\$0.34	3.78"
50691	3.5	Cand.	2,4,7	3.5B11/LED/DIM/CL/CB/27	Box	40	Warm White	Clear	2700	90	300	25000	22.8	\$0.42	3.78"
50701	3.5	Med.	2,4,7	3.5B11/LED/DIM/CL/27	Box	40	Warm White	Clear	2700	90	300	25000	22.8	\$0.42	3.78"
53141	4.5	Cand.	2,4,7	4.5B11/LED/DIM/CL/CB/27	Hanging Box	40	Warm White	Clear	2700	80	300	25000	22.8	\$0.54	3.78"
53130	6.5	Cand.	2,4,7	6.5B13/LED/DIM/CL/CB/27	Hanging Box	60	Warm White	Clear	2700	80	500	25000	22.8	\$0.78	4.49"
FLAME TIP															
45124	4	Cand.	2,4,7	4C11/LED/CL/CB/27 2CD	Card (2)	40	Warm White	Clear	2700	80	300	15000	13.6	\$0.48	4.00"
45129	7	Cand.	2,4,7	7C13/LED/CL/CB/27 2CD	Card (2)	60	Warm White	Clear	2700	80	500	15000	13.6	\$0.84	4.49"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.



OMNI A15

GENERAL PURPOSE LAMPS

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
OMNI A15															
45134	5	Med.	4,7	5OMNIA15/LED/SW/27 1CD	Card	40	Warm White	Soft White	2700	80	450	15000	13.6	\$0.60	3.54"
45136	5.5	Med.	4,7	5.5OMNIA15/LED/SW/27 1CD	Card	60	Warm White	Soft White	2700	80	600	15000	13.6	\$0.66	3.55"
33191	5.5	Med.	2,4,7	5.5OMNIA15/LED/DIM/SW/27 1CD	Card	40	Warm White	Soft White	2700	80	450	25000	22.8	\$0.66	3.54"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

1 New Item

2 Dimmable

3 Low Voltage (12V)

4 Approved for Damp Location

5 Approved for Wet Location

6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures

GENERAL PURPOSE LAMPS



OMNI A19



OMNI A19
GU24 BASE



A19

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
OMNI A19															
51850	6	Med.	2,4,7	60MNIA19/LED/DIM/SW/27	Box	40	Warm White	Soft White	2700	80	480	25000	22.8	\$0.72	4.33"
51321	6	Med.	2,4,7	60MNIA19/LED/DIM/SW/30	Box	40	Warm White	Soft White	3000	80	480	25000	22.8	\$0.72	4.44"
53189	6	Med.	4,7	60MNIA19/LED/SW/30	Box	40	Warm White	Soft White	3000	80	480	15000	13.6	\$0.72	4.33"
45156	6	Med.	4,7	60MNIA19/LED/SW/30 4PK	Box (4)	40	Warm White	Soft White	3000	80	480	15000	13.6	\$0.72	4.33"
45138	6	Med.	4,7	60MNIA19/LED/SW/50	Box	40	Daylight	Soft White	5000	80	480	15000	13.6	\$0.72	4.33"
43697	9	Med.	4,7	90MNIA19/LED/SW/27	Box	60	Warm White	Soft White	2700	80	800	25000	22.8	\$1.08	4.33"
51840	9	Med.	2,4,7	90MNIA19/LED/DIM/SW/27	Box	60	Warm White	Soft White	2700	80	800	25000	22.8	\$1.08	4.44"
43440	9	Med.	4,7	90MNIA19/LED/SW/30 1CD	Card	60	Warm White	Soft White	3000	80	800	25000	22.8	\$1.08	4.33"
51830	9	Med.	2,4,7	90MNIA19/LED/DIM/SW/30 1CD	Card	60	Warm White	Soft White	3000	80	800	25000	22.8	\$1.08	4.44"
24 50741	9	Med.	2,4,7	90MNIA19/LED/DIM/SW/30	Box	60	Warm White	Soft White	3000	90	810	25000	22.8	\$1.08	4.25"
51331	9	Med.	2,4,7	90MNIA19/LED/DIM/SW/30	Box	60	Warm White	Soft White	3000	80	800	25000	22.8	\$1.08	4.44"
51380	9	Med.	2,4,7	90MNIA19/LED/DIM/SW/30 4PK	Box (4)	60	Warm White	Soft White	3000	80	800	25000	22.8	\$1.08	4.33"
51341	9	Med.	2,4,7	90MNIA19/LED/DIM/SW/50	Box	60	Daylight	Soft White	5000	80	800	25000	22.8	\$1.08	4.44"
50771	9	Med.	2,4,7	90MNIA19/LED/DIM/SW/40	Box	60	Cool White	Soft White	4000	80	800	25000	22.8	\$1.08	4.44"
35173	9.5	Med.	4,7	9.5OMNIA19/LED/SW/27 12PK	Box (12)	60	Warm White	Soft White	2700	80	800	15000	13.6	\$1.14	4.33"
53127	9.5	Med.	4,7	9.5OMNIA19/LED/SW/30	Box	60	Warm White	Soft White	3000	80	800	15000	13.6	\$1.14	4.33"
45160	9.5	Med.	4,7	9.5OMNIA19/LED/SW/30 4PK	Box (4)	60	Warm White	Soft White	3000	80	800	15000	13.6	\$1.14	4.33"
45140	9.5	Med.	4,7	9.5OMNIA19/LED/SW/50	Box	60	Daylight	Soft White	5000	80	800	15000	13.6	\$1.14	4.33"
53158	9.8	GU24	2,4,7	9.8OMNIA19/LED/DIM/SW/GU24/27	Box	60	Warm White	Soft White	2700	80	800	25000	22.8	\$1.18	4.33"
51951	11	Med.	2,4,7	11OMNIA19/LED/DIM/SW/27	Box	75	Warm White	Soft White	2700	80	1100	25000	22.8	\$1.32	4.33"
53190	11	Med.	4,7	11OMNIA19/LED/SW/30	Box	75	Warm White	Soft White	3000	80	1100	15000	13.6	\$1.32	4.49"
45157	11	Med.	4,7	11OMNIA19/LED/SW/30 2PK	Box (2)	75	Warm White	Soft White	3000	80	1100	15000	13.6	\$1.32	4.49"
50811	11	Med.	2,4,7	11OMNIA19/LED/DIM/SW/30	Box	75	Warm White	Soft White	3000	80	1100	25000	22.8	\$1.32	4.33"
45141	11	Med.	4,7	11OMNIA19/LED/SW/50	Box	75	Daylight	Soft White	5000	80	1100	15000	13.6	\$1.32	4.49"
55145	11	Med.	2,4,7	11OMNIA19/LED/DIM/SW/50	Box	75	Daylight	Soft White	5000	80	1100	25000	22.8	\$1.32	4.33"
53140	3/9/12	Med.	2,4,7	3/9/12OMNIA19/LED/3WAY/SW/27	Box	30/ 70/ 100	Warm White	Soft White	2700	80	280/ 950/ 1200	25000	22.8	\$1.45	4.65"
50940	15	Med.	2,4,7	15OMNIA19/LED/DIM/SW/27	Box	100	Warm White	Soft White	2700	80	1600	25000	22.8	\$1.81	4.92"
51970	15	Med.	2,4,7	15OMNIA19/LED/DIM/SW/30	Box	100	Warm White	Soft White	3000	80	1600	25000	22.8	\$1.81	4.92"
50750	15	Med.	2,4,7	15OMNIA19/LED/DIM/SW/40	Box	100	Cool White	Soft White	4000	80	1600	25000	22.8	\$1.81	4.64"
50760	15.5	Med.	4,7	15.5OMNIA19/LED/SW/40	Box	100	Cool White	Soft White	4000	80	1600	15000	13.6	\$1.87	4.64"
50790	15.5	Med.	4,7	15.5OMNIA19/LED/SW/50	Box	100	Daylight	Soft White	5000	80	1600	15000	13.6	\$1.87	4.64"
A19															
52280	14	Med.	4,7	14A19/LED/SW/30	Box	100	Warm White	Soft White	3000	80	1500	15000	13.6	\$1.69	4.25"
52300	14	Med.	4,7	14A19/LED/SW/30 2PK	Box (2)	100	Warm White	Soft White	3000	80	1500	15000	13.6	\$1.69	4.25"
52290	14	Med.	4,7	14A19/LED/SW/50	Box	100	Daylight	Soft White	5000	80	1500	15000	13.6	\$1.69	4.25"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- | | | | |
|------------|------------------------------|-----------------------------|---|
| 1 New Item | 3 Low Voltage (12V) | 5 Approved for Wet Location | 7 Approved for Use in Totally Enclosed Fixtures |
| 2 Dimmable | 4 Approved for Damp Location | 6 Indoor Application Only | |

COLOR GENERAL PURPOSE LAMPS



OMNI A19
RED

OMNI A19
BLUE

OMNI A19
GREEN

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
SPECIALTY - COLOR OMNI A19															
03153	5	Med.	4,7	50MNIA19/LED/R	Box	40	—	Red	—	—	—	25000	22.8	\$0.60	4.33"
03154	6	Med.	4,7	60MNIA19/LED/B	Box	40	—	Blue	—	—	—	25000	22.8	\$0.72	4.33"
03152	6	Med.	4,7	60MNIA19/LED/G	Box	40	—	Green	—	—	—	25000	22.8	\$0.72	4.33"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

SPECIALTY 120-277V LAMPS



OMNI A21

OMNI A23

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
OMNI A21															
51170	19	Med.	4,7	19OMNIA21/LED/SW/120-277V/50	Box	125	Daylight	Soft White	5000	80	2000	25000	22.8	\$2.29	5.55"
51590	25	Med.	4,7	25OMNIA21/LED/SW/120-277V/30	Box	150	Warm White	Soft White	3000	80	2550	25000	22.8	\$3.01	5.47"
51700	25	Med.	4,7	25OMNIA21/LED/SW/120-277V/50	Box	150	Daylight	Soft White	5000	80	2550	25000	22.8	\$3.01	5.47"
OMNI A23															
51600	29	Med.	4,7	29OMNIA23/LED/SW/120-277V/30	Box	200	Warm White	Soft White	3000	80	3050	25000	22.8	\$3.49	6.30"
51710	29	Med.	4,7	29OMNIA23/LED/SW/120-277V/50	Box	200	Daylight	Soft White	5000	80	3050	25000	22.8	\$3.49	6.30"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

GLOBE LAMPS



G16.5
SOFT WHITE/CLEAR

G25
SOFT WHITE

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
G16.5 GLOBE															
45131	7	Cand.	2,4,7	7G16.5/LED/DIM/SW/CB/27 1CD	Card	60	Warm White	Soft White	2700	80	500	25000	22.8	\$0.84	2.75"
53129	7	Med.	2,4,7	7G16.5/LED/DIM/CL/27	Box	60	Warm White	Clear	2700	80	500	25000	22.8	\$0.84	2.91"
G25 GLOBE															
53011	6	Med.	2,4,7	6G25/LED/DIM/SW/30	Box	75	Warm White	Soft White	3000	80	590	25000	22.8	\$0.72	4.33"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- 1 New Item
- 2 Dimmable
- 3 Low Voltage (12V)
- 4 Approved for Damp Location
- 5 Approved for Wet Location
- 6 Indoor Application Only
- 7 Approved for Use in Totally Enclosed Fixtures

REFLECTOR LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
MR11 REFLECTOR															
35152	4	GU4	4,7	4MR11/LED/FL/GU4/30 1CD	Card	35	Warm White	White	3000	80	250	25000	22.8	\$0.48	1.69"
35153	4	GU10	2,4,7	4MR11/LED/DIM/FL/GU10/30 1CD	Card	35	Warm White	White	3000	80	250	25000	22.8	\$0.48	1.89"
MR16 REFLECTOR															
33638	4.5	GU5.3	2,4,7	4.5MR16/LED/DIM/FL/30	Hanging Box	35	Warm White	Clear	3000	80	360	25000	22.8	\$0.54	1.85"
33491	6.5	GU5.3	2,4,7	6.5MR16/LED/DIM/FL/30	Hanging Box	50	Warm White	Clear	3000	80	500	25000	22.8	\$0.78	1.85"
53032	6.5	GU10	2,4,7	6.5MR16/LED/DIM/FL/GU10/30	Box	50	Warm White	Frost	3000	80	500	25000	22.8	\$0.78	2.16"
R14 REFLECTOR															
45154	4	Inter.	2,4,7	4R14/LED/DIM/FL/IN/27 1CD	Card	25	Warm White	Soft White	2700	80	280	25000	22.8	\$0.48	2.55"
R20 REFLECTOR															
53050	6.5	Med.	2,4,7	6.5R20/LED/DIM/FL/27	Box	50	Warm White	Frost	2700	80	525	25000	22.8	\$0.78	3.93"
53161	6.5	Med.	2,4,7	6.5R20/LED/DIM/FL/30	Box	50	Warm White	Frost	3000	80	525	25000	22.8	\$0.78	3.93"
50110	6.5	Med.	2,4,7	6.5R20/LED/DIM/FL/40	Box	50	Cool White	Frost	4000	80	525	25000	22.8	\$0.78	3.93"
BR30 & R30 REFLECTOR															
53000	8	Med.	2,4	8R30/LED/DIM/FL/27	Box	65	Warm White	Frost	2700	80	650	25000	22.8	\$0.96	5.16"
33159	8	GU24	2,4	8R30/LED/DIM/FL/GU24/27	Box	65	Warm White	Frost	2700	80	650	25000	22.8	\$0.96	4.96"
52200	9	Med.	2,4,7	9BR30/LED/DIM/FL/27	Box	65	Warm White	Frost	2700	80	750	25000	22.8	\$1.08	5.24"
35174	9	Med.	2,4,7	9BR30/LED/DIM/FL/27 12PK	Box (12)	65	Warm White	Frost	2700	80	750	25000	22.8	\$1.08	5.24"
52210	9	Med.	2,4,7	9BR30/LED/DIM/FL/30	Box	65	Warm White	Frost	3000	80	750	25000	22.8	\$1.08	5.24"
50081	9	Med.	2,4,7	9BR30/LED/DIM/FL/40	Box	65	Cool White	Frost	4000	80	750	25000	22.8	\$1.08	5.24"
45148	9	Med.	2,4,7	9BR30/LED/DIM/FL/50	Box	65	Daylight	Frost	5000	80	750	25000	22.8	\$1.08	5.24"
R40 REFLECTOR															
33163	16.5	Med.	2,4	16.5R40/LED/DIM/FL/27	Box	85	Warm White	Frost	2700	80	1200	25000	22.8	\$1.99	6.46"
53064	16.5	Med.	2,4	16.5R40/LED/DIM/FL/30	Box	85	Warm White	Frost	3000	80	1200	25000	22.8	\$1.99	6.46"
50140	16.5	Med.	2,4	16.5R40/LED/DIM/FL/50	Box	85	Daylight	Frost	5000	80	1200	25000	22.8	\$1.99	6.46"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- 1 New Item
- 2 Dimmable

- 3 Low Voltage (12V)
- 4 Approved for Damp Location

- 5 Approved for Wet Location
- 6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures

REFLECTOR LAMPS



PAR16

PAR20

PAR30S

PAR30

PAR38

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
PAR16 REFLECTOR															
33067	6	Med.	2,4,7	6PAR16/LED/DIM/FL/30	Box	50	Warm White	Clear	3000	80	470	25000	22.8	\$0.72	3.50"
PAR20 REFLECTOR															
53012	7	Med.	2,5,7	7PAR20/LED/DIM/IndOutFL/30	Box	50	Warm White	Clear	3000	80	490	25000	22.8	\$0.84	3.50"
50000	7	Med.	2,4,7	7PAR20/LED/DIM/FL/40	Box	50	Cool White	Clear	4000	80	490	25000	22.8	\$0.84	3.50"
50010	7	Med.	2,4,7	7PAR20/LED/DIM/FL/50	Box	50	Daylight	Clear	5000	80	490	25000	22.8	\$0.84	3.50"
PAR30 REFLECTOR															
51800	10	Med.	2,5,7	10PAR30S/LED/DIM/IndOutFL/30	Box	75	Warm White	Clear	3000	80	840	25000	22.8	\$1.20	3.58"
50051	10	Med.	2,5,7	10PAR30S/LED/DIM/IndOutFL/50	Box	75	Daylight	Clear	5000	80	840	25000	22.8	\$1.20	3.58"
51450	10	Med.	2,5,7	10PAR30/LED/DIM/IndOutFL/30	Box	75	Warm White	Clear	3000	80	840	25000	22.8	\$1.20	4.57"
50020	10	Med.	2,4,7	10PAR30/LED/DIM/FL/40	Box	75	Cool White	Clear	4000	80	840	25000	22.8	\$1.20	4.57"
PAR38 REFLECTOR															
53110 □	15	Med.	2,5,7	15PAR38/LED/DIM/IndOutFL/30	Box	90	Warm White	Clear	3000	80	1350	25000	22.8	\$1.81	5.32"
53114 □	15	Med.	2,5,7	15PAR38/LED/DIM/IndOutFL/30 2PK	Box (2)	90	Warm White	Clear	3000	80	1350	25000	22.8	\$1.81	5.32"
50061	15	Med.	2,5,7	15PAR38/LED/DIM/IndOutFL/40	Box	90	Cool White	Clear	4000	80	1350	25000	22.8	\$1.81	5.32"
50071	15	Med.	2,5,7	15PAR38/LED/DIM/IndOutFL/50	Box	90	Daylight	Clear	5000	80	1350	25000	22.8	\$1.81	5.32"

□ IP65 Rated

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh



INDOOR/OUTDOOR COLOR REFLECTOR LAMPS



PAR38 RED

PAR38 GREEN

PAR38 BLUE

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
SPECIALTY - COLOR PAR38 REFLECTOR															
33147	15	Med.	5,7	15PAR38/LED/FL/R	Box	100	—	Red	—	—	—	25000	22.8	\$1.81	5.32"
33149	15	Med.	5,7	15PAR38/LED/FL/G	Box	100	—	Green	—	—	—	25000	22.8	\$1.81	5.32"
33151	15	Med.	5,7	15PAR38/LED/FL/B	Box	100	—	Blue	—	—	—	25000	22.8	\$1.81	5.32"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

1 New Item

2 Dimmable

3 Low Voltage (12V)

4 Approved for Damp Location

5 Approved for Wet Location

6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



BR30

GROW LAMP

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
BR REFLECTOR														
51820	9	Med.	4	9BR30/LED/FL/GROW/G	Box	65	—	—	—	—	25000	22.8	\$1.08	5.12"
											*Based on 3 hrs./day		**Based on 3 hrs./day 11¢/kWh	

GENERAL PURPOSE SPECIALTY LAMPS




Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
C7															
55110	0.5	Cand.	4,7	0.5C7/LED/CL/CB/27 2CD	Card (2)	4	Warm White	Clear	2700	80	20	15000	13.6	\$0.06	2.00"
55108	0.5	Cand.	4,7	0.5C7/LED/F/CB/27 2CD	Card (2)	4	Warm White	Frost	2700	80	20	15000	13.6	\$0.06	2.00"
55111	0.75	Cand.	4,7	0.75C7/LED/CL/CB/27 2CD	Card (2)	7	Warm White	Clear	2700	80	50	15000	13.6	\$0.09	2.00"
55109	0.75	Cand.	4,7	0.75C7/LED/F/CB/27 2CD	Card (2)	7	Warm White	Frost	2700	80	50	15000	13.6	\$0.09	2.00"
S6															
45117	0.6	Cand.	4,7	0.6S6/LED/CL/CB/27 1CD	Card	6	Warm White	Clear	2700	80	32	15000	13.6	\$0.07	1.77"
S11															
45113	1	Med.	4,7	1S11/LED/CL/27 1CD	Card	7.5	Warm White	Clear	2700	80	50	15000	13.6	\$0.12	1.99"
45112	1	Med.	4,7	1S11/LED/W/27 1CD	Card	7.5	Warm White	White	2700	80	40	15000	13.6	\$0.12	2.08"
45114	1.5	Inter.	4,7	1.5S11/LED/CL/IN/27 1CD	Card	10	Warm White	Clear	2700	80	80	15000	13.6	\$0.18	2.09"
S14															
55116	1.2	Med.	5,7	1.2S14/LED/CL/27 1CD	Card	15	Warm White	Clear	2700	80	120	15000	13.6	\$0.14	3.23"
55115	1.2	Med.	5,7	1.2S14/LED/F/27 1CD	Card	15	Warm White	Frost	2700	80	120	15000	13.6	\$0.14	3.23"
T7															
45118	1	Cand.	4,7	1T7/LED/CL/CB/27 1CD	Card	10	Warm White	Clear	2700	80	50	15000	13.6	\$0.12	2.09"
45119	1.5	Inter.	4,7	1.5T7/LED/CL/IN/27 1CD	Card	15	Warm White	Clear	2700	80	80	15000	13.6	\$0.18	2.09"
45120	1.5	D.C. Bay.	4,7	1.5T7/LED/CL/DC/27 1CD	Card	15	Warm White	Clear	2700	80	80	15000	13.6	\$0.18	2.09"
33199	8	Med.	4,7	8T7/LED/F/30 1CD	Card	60	Warm White	Frost	3000	80	800	15000	13.6	\$0.96	4.22"
											*Based on 3 hrs./day		**Based on 3 hrs./day 11¢/kWh		

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- | | | | |
|------------|------------------------------|-----------------------------|---|
| 1 New Item | 3 Low Voltage (12V) | 5 Approved for Wet Location | 7 Approved for Use in Totally Enclosed Fixtures |
| 2 Dimmable | 4 Approved for Damp Location | 6 Indoor Application Only | |

HALOGEN ALTERNATIVE SPECIALTY LAMPS



Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Volt	Package Type	Equiv. Halogen Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
JC																
43184	1.5	G4	3,4,7	15G4/LED/F/30 1CD	12	Card	10	Warm White	Frost	3000	80	150	25000	22.8	\$0.18	1.46"
JCD																
33185	2.5	G9	4,7	25G9/LED/CL/30 1CD	120	Card	25	Warm White	Clear	3000	80	240	25000	22.8	\$0.30	2.05"
51641	5	G9	2,4,7	5G9/LED/DIM/CL/30	120	Box	40	Warm White	Clear	3000	80	500	25000	22.8	\$0.60	2.13"
DOUBLE-ENDED																
33187	9	RSC	2,4,7	9R7S/LED/CL/27 1CD	120	Card	75	Warm White	Clear	2700	80	1000	25000	22.8	\$1.08	4.65"
SINGLE-ENDED																
51631	5	E11	2,4,7	5E11/LED/DIM/CL/30	120	Box	50	Warm White	Clear	3000	80	500	25000	22.8	\$0.60	2.24"

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

PIN BASE LAMPS

Replacements for 13W, 18W, 32W, and 42W CFL pin-base lamps.



Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. CFL Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)*	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL
HORIZONTAL INSTALLATION															
51481 	9	G24Q GX24Q	1,2,4,7	9PL/H/LED/DIM/G24Q/35 Direct Install	Box	26	Warm White	White	3500	83	1000	50000	45.6	\$1.08	5.20"
51490	9	G24Q GX24Q	2,4,7	9PL/H/LED/DIM/G24Q/40 Direct Install	Box	26	Cool White	White	4000	82	1000	50000	45.6	\$1.08	5.20"
VERTICAL INSTALLATION															
51520	9	G24Q GX24Q	2,4,7	9PL/V/LED/DIM/G24Q/40 Direct Install	Box	26	Cool White	White	4000	82	1050	50000	45.6	\$1.08	4.65"

Dimmable when used with a compatible dimming ballast.

* Lumen output is based on ballast type.

♦ DLC qualified

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh



TWIN TUBE LONG PIN BASE LAMP



TWIN TUBE LONG

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. CFL Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
TWIN TUBE LONG													
52220 ⚙	23	2G11	4	23PL/H/LED/2G11/DIM/40 Ballast Bypass	Box	40	Cool White	White	4000	82	2800	50000	22.48"

⚙ Dimmable when used in conjunction with a 0-10v dimming system and dimming module sold separately (Item# 502606930).

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

1 New Item

2 Dimmable

3 Low Voltage (12V)

4 Approved for Damp Location

5 Approved for Wet Location

6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures

NEW!



6" LED Surface Mount

Height: 1"
Diameter: 6"



63219
Brushed Nickel Finish
with Frosted Lens



63220 & 63224
Oil Rubbed Bronze Finish
with Frosted Lens



63221, 63225 & 63644
White Finish
with Frosted Lens

7 3/8" LED Surface Mount

Height: 1.25"
Diameter: 7.50"



63226 & 63230
Chrome Finish
with Frosted Lens



63227 & 63231
Brushed Nickel Finish
with Frosted Lens



63228 & 63232
Oil Rubbed Bronze Finish
with Frosted Lens



63229, 63233 & 63645
White Finish
with Frosted Lens

LED SURFACE MOUNT FIXTURES

Item No.	Energy Used (Watts)	Equiv. Incand. Wattage	Light Appearance (Kelvin)	Brightness (Lumens)	CRI	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**
6 INCH LED SURFACE MOUNTS								
63219	12	60	3000 (Warm White)	840	80	50000	45.6	\$1.45
63220	12	60	3000 (Warm White)	840	80	50000	45.6	\$1.45
63224	12	60	4000 (Cool White)	840	80	50000	45.6	\$1.45
63221	12	60	3000 (Warm White)	840	80	50000	45.6	\$1.45
63225	12	60	4000 (Cool White)	840	80	50000	45.6	\$1.45
63644	12	60	5000 (Daylight)	840	80	50000	45.6	\$1.45
7 3/8 INCH LED SURFACE MOUNTS								
63226	15	75	3000 (Warm White)	1050	80	50000	45.6	\$1.81
63230	15	75	4000 (Cool White)	1050	80	50000	45.6	\$1.81
63227	15	75	3000 (Warm White)	1050	80	50000	45.6	\$1.81
63231	15	75	4000 (Cool White)	1050	80	50000	45.6	\$1.81
63228	15	75	3000 (Warm White)	1050	80	50000	45.6	\$1.81
63232	15	75	4000 (Cool White)	1050	80	50000	45.6	\$1.81
63229	15	75	3000 (Warm White)	1050	80	50000	45.6	\$1.81
63233	15	75	4000 (Cool White)	1050	80	50000	45.6	\$1.81
63645	15	75	5000 (Daylight)	1050	80	50000	45.6	\$1.81

*Based on 3hrs./day **Based on 3hrs./day 11¢/kWh

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

1 New Item
2 Dimmable

3 Low Voltage (12V)
4 Approved for Damp Location

5 Approved for Wet Location
6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



SLIM RECESSED DOWNLIGHTS

Item No.	Energy Used (Watts)	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	Brightness CRI (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL	MOD
ROUND SLIM STEP BAFFLE WITH COLOR TEMPERATURE SELECTION														
24 52260 ★❖	10	2,5	10R/4"/LED/DIM/SLIMBAFFLE/FL/27-50	Box	65	Multi 5	White	2700/3000/3500/4000/5000	90	650	50000	45.6	\$1.20	1.42" 5.04"
24 52270 ❖❖	12	2,5	12R/6"/LED/DIM/SLIMBAFFLE/FL/27-50	Box	80	Multi 5	White	2700/3000/3500/4000/5000	90	900	50000	45.6	\$1.45	1.42" 7.17"
ROUND DEEP STEP BAFFLE WITH COLOR TEMPERATURE SELECTION														
24 52370 ★❖	12	2,5	12R/4"/LED/DIM/DEEPBAFFLE/FL/27-50	Box	65	Multi 5	White	2700/3000/3500/4000/5000	90	750	50000	45.6	\$1.45	1.74" 5.09"
24 52380 ❖❖	15	2,5	15R/6"/LED/DIM/DEEPBAFFLE/FL/27-50	Box	100	Multi 5	White	2700/3000/3500/4000/5000	90	1000	50000	45.6	\$1.81	1.86" 7.32"
ROUND SLIM WITH COLOR TEMPERATURE SELECTION														
52011 ★❖	10	2,5	10R/4"/LED/DIM/SLIM/FL/27-50	Box	65	Multi 5	White	2700/3000/3500/4000/5000	80	650	50000	45.6	\$1.20	1.02" 5.04"
52050 ▲❖	11	2,5	11R/5"/LED/DIM/SLIM/FL/27-50	Box	75	Multi 5	White	2700/3000/3500/4000/5000	80	800	50000	45.6	\$1.32	1.02" 6.29"
52021 ❖❖	12	2,5	12R/6"/LED/DIM/SLIM/FL/27-50	Box	80	Multi 5	White	2700/3000/3500/4000/5000	80	950	50000	45.6	\$1.45	1.02" 7.17"
52450 ❖❖	18	2,5	18R/8"/LED/DIM/WH/SLIM/FL/120-277V/27-50	Box	100	Multi 5	White	2700/3000/3500/4000/5000	80	1600	50000	45.6	\$2.17	1.02" 9.29"
ROUND SLIM														
52160	7	2,4	7R/3"/LED/DIM/WH/SLIM/FL/27	Box	40	Warm White	White	2700	80	450	50000	45.6	\$0.84	0.98" 3.35"
52180	7	2,4	7R/3"/LED/DIM/WH/SLIM/FL/40	Box	40	Cool White	White	4000	80	450	50000	45.6	\$0.84	0.98" 3.35"
52190	7	2,4	7R/3"/LED/DIM/WH/SLIM/FL/50	Box	40	Daylight	White	5000	80	450	50000	45.6	\$0.84	0.98" 3.35"
24 52171 ❖❖	8	2,5	8R/3"/LED/DIM/WH/SLIM/FL/30	Box	40	Warm White	White	3000	90	500	50000	45.6	\$0.96	1.02" 3.78"
24 50951 ★❖❖	10	2,5	10R/4"/LED/DIM/WH/SLIM/FL/27	Box	65	Warm White	White	2700	90	650	50000	45.6	\$1.20	1.02" 5.04"
24 50971 ★❖❖	10	2,5	10R/4"/LED/DIM/WH/SLIM/FL/30	Box	65	Warm White	White	3000	90	650	50000	45.6	\$1.20	1.02" 5.04"
24 51031 ❖❖❖	12	2,5	12R/6"/LED/DIM/WH/SLIM/FL/27	Box	80	Warm White	White	2700	90	900	50000	45.6	\$1.45	1.02" 7.17"
24 51071 ❖❖❖	12	2,5	12R/6"/LED/DIM/WH/SLIM/FL/30	Box	80	Warm White	White	3000	90	900	50000	45.6	\$1.45	1.02" 7.17"
24 51091 ❖❖❖	12	2,5	12R/6"/LED/DIM/WH/SLIM/FL/40	Box	80	Cool White	White	4000	90	900	50000	45.6	\$1.45	1.02" 7.17"
24 52001 ❖	18	2,4	18R/8"/LED/DIM/WH/SLIM/FL/120-277V/50	Box	100	Daylight	White	5000	90	1500	50000	45.6	\$2.17	1.02" 9.29"
★ Compatible with item #509506913 ▲ Compatible with item #520506913 ❖ Compatible with item #510306913 *Based on 3 hrs./day **Based on 3 hrs./day 11¢/kWh ❖ Compatible with Special Order accessory item #509516931 ❖ IP40 Rated														

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

SLIM RECESSED DOWNLIGHT ACCESSORIES



Item No.	Footnotes	Description	Height	Width	Depth
509516931 *		10 ft. Extension Cord for Slim Recessed Downlights	—	—	—
509506913		Bracket for 4 in. Slim Recessed Downlights	0.03"	26.00"	6.25"
520506913		Bracket for 5 in. Slim Recessed Downlights	0.03"	26.00"	8.35"
510306913		Bracket for 6 in. Slim Recessed Downlights	0.03"	26.00"	8.38"

* SPECIAL ORDER ITEM - CALL YOUR WESTINGHOUSE LIGHTING REPRESENTATIVE FOR ADDITIONAL INFORMATION

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- | | | | |
|------------|------------------------------|-----------------------------|---|
| 1 New Item | 3 Low Voltage (12V) | 5 Approved for Wet Location | 7 Approved for Use in Totally Enclosed Fixtures |
| 2 Dimmable | 4 Approved for Damp Location | 6 Indoor Application Only | |



RECESSED DOWNLIGHTS

All Recessed LED Downlight Kits are UL or ETL Classified.

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	Brightness CRI	(Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL	MOD
SMOOTH BAFFLE WITH COLOR TEMPERATURE SELECTION																
24 52430	10	Med.	2,5	10R/4"/LED/DIM/FL/27-50	Box	65	Multi 5	Frost	2700/3000/3500/4000/5000	90	750	50000	45.6	\$1.20	2.99"	5.08"
24 52440	14	Med.	2,5	14R/5-6"/LED/DIM/FL/27-50	Box	100	Multi 5	Frost	2700/3000/3500/4000/5000	90	1100	50000	45.6	\$1.69	3.22"	7.36"
STEP BAFFLE WITH COLOR TEMPERATURE SELECTION																
24 51401	6.5	Med.	2,5	6.5R/4"/LED/DIM/FL/27-50	Box	65	Multi 5	White	2700/3000/3500/4000/5000	90	550	50000	45.6	\$0.78	2.48"	5.27"
24 52350	10	Med.	2,5	10R/4"/LED/DIM/FL/27-50	Box	65	Multi 5	White	2700/3000/3500/4000/5000	90	750	50000	45.6	\$1.20	3.11"	5.09"
24 51411	11	Med.	2,5	11R/5-6"/LED/DIM/FL/27-50	Box	80	Multi 5	White	2700/3000/3500/4000/5000	90	1000	50000	45.6	\$1.32	2.87"	7.48"
24 52360	14	Med.	2,5	14R/5-6"/LED/DIM/FL/27-50	Box	100	Multi 5	White	2700/3000/3500/4000/5000	90	1100	50000	45.6	\$1.69	3.23"	7.32"
STEP BAFFLE																
51047	10	Med.	2,5	10R/4"/LED/DIM/FL/30	Box	65	Warm White	Frost	3000	90	670	50000	45.6	\$1.20	2.88"	5.52"
24 52390	12	Med.	2,5	12R/5-6"/LED/DIM/FL/30	Box	80	Warm White	Frost	3000	90	850	50000	45.6	\$1.45	2.91"	7.24"
SMOOTH BAFFLE																
41043	8	Med.	2,4	8R/4"/LED/DIM/FL/27	Box	65	Warm White	Frost	2700	80	650	50000	45.6	\$0.96	3.50"	5.04"
41041	8	Med.	2,4	8R/4"/LED/DIM/FL/30	Box	65	Warm White	Frost	3000	80	650	50000	45.6	\$0.96	3.50"	5.04"
41040	14	Med.	2,4	14R/5"/LED/DIM/FL/27	Box	80	Warm White	Frost	2700	80	1000	50000	45.6	\$1.69	3.54"	6.30"
41044	14	Med.	2,4	14R/5"/LED/DIM/FL/30	Box	80	Warm White	Frost	3000	80	1000	50000	45.6	\$1.69	3.54"	6.30"
SQUARE STEP BAFFLE																
31053	10	Med.	2,5	10R/4"/LED/DIM/SQ/FL/30	Box	60	Warm White	Frost	3000	90	650	50000	45.6	\$1.20	2.06"	5.13"
31055	15	Med.	2,5	15R/6"/LED/DIM/SQ/FL/30	Box	100	Warm White	Frost	3000	90	1100	50000	45.6	\$1.81	3.00"	7.50"
31056	15	Med.	2,5	15R/6"/LED/DIM/SQ/FL/40	Box	100	Cool White	Frost	4000	90	1100	50000	45.6	\$1.81	3.00"	7.50"
SLOPED STEP BAFFLE																
50820	10	Med.	2,4	10R/4"/LED/DIM/SLP/FL/27	Box	65	Warm White	Frost	2700	90	650	35000	31.9	\$1.20	3.35"	5.15"
50830	10	Med.	2,4	10R/4"/LED/DIM/SLP/FL/30	Box	65	Warm White	Frost	3000	90	650	35000	31.9	\$1.20	3.35"	5.15"
50840	13	Med.	2,4	13R/6"/LED/DIM/SLP/FL/27	Box	80	Warm White	Frost	2700	90	900	35000	31.9	\$1.57	3.50"	7.28"
50850	13	Med.	2,4	13R/6"/LED/DIM/SLP/FL/30	Box	80	Warm White	Frost	3000	90	900	35000	31.9	\$1.57	3.50"	7.28"

❖ IP40 Rated

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

1 New Item
2 Dimmable

3 Low Voltage (12V)
4 Approved for Damp Location


5 Approved for Wet Location
6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



GIMBAL RECESSED DOWNLIGHTS

All Gimbal Recessed LED Downlights are ETL Listed.

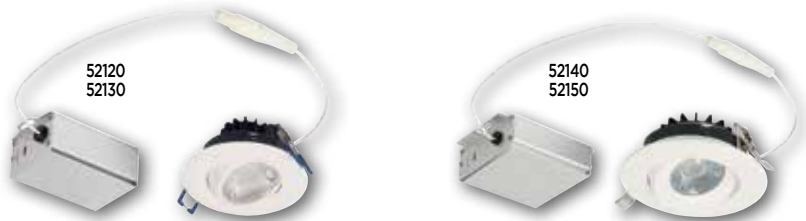

Item No.	Energy Used (Watts)	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	Life in Years*	Est. Yearly Energy Cost**	MOL	MOD
GIMBAL RECESSED DOWNLIGHTS															
52120	7	2,4	7R/3"/LED/DIM/WH/GIMBAL/27	Box	65	Warm White	White	2700	80	610	50000	45.6	\$0.84	1.83"	3.37"
52130	7	2,4	7R/3"/LED/DIM/WH/GIMBAL/30	Box	65	Warm White	White	3000	80	610	50000	45.6	\$0.84	1.83"	3.37"
52140 +	12	2,4	12R/4"/LED/DIM/WH/GIMBAL/27	Box	80	Warm White	White	2700	90	850	50000	45.6	\$1.45	2.24"	5.04"
52150 +	12	2,4	12R/4"/LED/DIM/WH/GIMBAL/30	Box	80	Warm White	White	3000	90	850	50000	45.6	\$1.45	2.24"	5.04"

+ Compatible with Bracket for 4 in. Slim Recessed Downlights sold separately (Item# 509506913)

*Based on 3 hrs./day

**Based on 3 hrs./day 11¢/kWh

24 Can be used to comply with the 2019 Title 24, part 6, high efficacy light source requirements.



HIGH BAY LAMP

This LED Lamp is 120-277V.

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. HID Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
HIGH BAY													
51720	80	Extended Mogul	4,7	80LB/LED/HL/EX39/50	Box	250	Daylight	White	5000	80	9700	50000	10.12"
50570	115	Mogul	4,7	115HB/LED/HL/E39/50	Box	400	Daylight	Clear	5000	80	15500	50000	8.11"
51730	130	Extended Mogul	4,7	130HB/LED/HL/EX39/50	Box	400	Daylight	White	5000	80	16100	50000	12.40"



FILAMENT HIGH LUMEN

These LED Lamps are 120-277V.

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. HID Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
ED28 FILAMENT													
52250	32	Mogul	5,7	32ED28/FilamentLED/CL/120-277V/E39/50	Box	175	Daylight	Clear	5000	80	5000	15000	8.86"
52340	36	Mogul	5,7	36ED28/FilamentLED/CL/120-277V/E39/50	Box	200	Daylight	Clear	5000	80	6000	25000	8.86"
52420	45	Mogul	5,7	45ED28/FilamentLED/CL/120-277V/E39/50	Box	250	Daylight	Clear	5000	80	7500	25000	9.06"

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

1 New Item

2 Dimmable

3 Low Voltage (12V)

4 Approved for Damp Location

5 Approved for Wet Location

6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures

SHOEBOX LAMP

This Shoebox LED Lamp is 100-277V.



Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. HID Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
SHOEBOX LAMP													
51190	80	Mogul/Extended Mogul	4,7	80SB/LED/EX39/50	Box	250	Daylight	Clear	5000	80	9200	50000	8.7"
51181 ♦	110	Mogul/Extended Mogul	4,7	110SB/LED/EX39/50	Box	400	Daylight	Clear	5000	80	15800	50000	11.06"

♦ DLC qualified

See product specification sheet for minimum compartment dimensions.



HIGH LUMEN LAMPS

All High Lumen LED Lamps are 120-277V.



Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Equiv. Incand. Wattage	Equiv. CFL Wattage	Equiv. HID Wattage	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
HIGH LUMEN															
35181	16	Med.	4,7	16T19/LED/HL/50	Box	125	32	70	Daylight	Clear	5000	80	2400	50000	6.57"
35165	22	Med.	4,7	22T19/LED/HL/50	Box	150	55	100	Daylight	Clear	5000	80	2860	50000	7.09"
35162	36	Med.	4,7	36T30/LED/HL/50	Box	200	65	150	Daylight	Clear	5000	80	4680	50000	8.27"
35163	45	Med.	4,7	45T30/LED/HL/50	Box	300	85	175	Daylight	Clear	5000	80	5850	50000	9.25"
35164 ♦	45	Mogul	4,7	45T30/LED/HL/E39/50	Box	300	85	175	Daylight	Clear	5000	80	5850	50000	9.25"
35166 ♦	54	Mogul	4,7	54T30/LED/HL/E39/50	Box	400	105	250	Daylight	Clear	5000	80	7020	50000	10.24"
51540 ♦	65	Mogul	4,7	65T30/LED/HL/E39/50	Box	450	125	320	Daylight	Clear	5000	80	8450	50000	12.20"
45167 ♦	100	Mogul	4,7	100T38/LED/HL/E39/50	Box	750	150	400	Daylight	Clear	5000	80	15000	50000	11.10"
35180 ♦	120	Mogul	4,7	120T38/LED/HL/E39/50	Box	1000	250	800	Daylight	Clear	5000	80	18000	50000	13.46"

♦ DLC qualified

See product specification sheet for minimum compartment dimensions.

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- 1 New Item
2 Dimmable

- 3 Low Voltage (12V)
4 Approved for Damp Location


- 5 Approved for Wet Location
6 Indoor Application Only

- 7 Approved for Use in Totally Enclosed Fixtures



LINEAR LAMPS

All Linear LED Lamps are
UL Classified and NSF Certified.

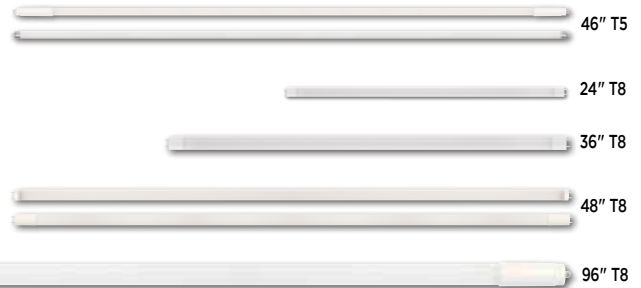

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Lamp Type Replacement	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
T5 46 INCH													
50801 ■	24	Mini BiPin	4,7	LED 24T5/46"/40 Ballast Bypass	Sleeve	T5	Cool White	White	4000	80	3500	50000	46"
51531 ■	24	Mini BiPin	4,7	LED 24T5/46"/50 DE Ballast Bypass	Sleeve	T5	Daylight	White	5000	80	3500	50000	46"
53788 ♦■	25	Mini BiPin	4	LED 25T5/46"/DIM/40 Direct Install	Sleeve	T5	Cool White	Frost	4000	82	3500	50000	46"
53789 ♦■	25	Mini BiPin	4	LED 25T5/46"/DIM/50 Direct Install	Sleeve	T5	Daylight	Frost	5000	82	3500	50000	46"
T8 24 INCH (DesignLights Consortium* qualified product)													
50260 ♦☼	9	Med. BiPin	4,7	LED 9T8/24"/DIM/40 Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	4000	82	1150	50000	24"
T8 36 INCH (DesignLights Consortium* qualified product)													
50280 ♦☼	12	Med. BiPin	4,7	LED 12T8/36"/DIM/40 Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	4000	82	1450	50000	36"
T8 48 INCH (DesignLights Consortium* qualified product)													
53739 ♦▶	11	Med. BiPin	4,7	LED 11T8/48"/DIM/40 Direct Install	Sleeve	T8	Cool White	Frost	4000	82	1800	50000	48"
53852 ♦▶	11	Med. BiPin	4,7	LED 11T8/48"/DIM/50 Direct Install	Sleeve	T8	Daylight	Frost	5000	82	1800	50000	48"
52310 ♦▶	14	Med. BiPin	4,7	LED 14T8/48"/DIM/35 Direct Install	Sleeve	T8	Cool White	Frost	3500	82	2200	50000	48"
52320 ♦▶	14	Med. BiPin	4,7	LED 14T8/48"/DIM/40 Direct Install	Sleeve	T8	Cool White	Frost	4000	82	2200	50000	48"
52330 ♦▶	14	Med. BiPin	4,7	LED 14T8/48"/DIM/50 Direct Install	Sleeve	T8	Daylight	Frost	5000	82	2200	50000	48"
T8 48 INCH SINGLE-ENDED/DOUBLE-ENDED POWERED (DesignLights Consortium* qualified product)													
51551 ♦☼	14	Med. BiPin	4,7	LED 14T8/48"/DIM/35 SE/DE Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	3500	83	1700	50000	48"
51561 ♦☼	14	Med. BiPin	4,7	LED 14T8/48"/DIM/40 SE/DE Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	4000	83	1800	50000	48"
51571 ♦☼	14	Med. BiPin	4,7	LED 14T8/48"/DIM/50 SE/DE Ballast Bypass	Sleeve	T8 & T12	Daylight	Frost	5000	83	1800	50000	48"
51421 ♦☼	17	Med. BiPin	4,7	LED 17T8/48"/DIM/35 SE/DE Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	3500	83	2100	50000	48"
51431 ♦☼	17	Med. BiPin	4,7	LED 17T8/48"/DIM/40 SE/DE Ballast Bypass	Sleeve	T8 & T12	Cool White	Frost	4000	83	2200	50000	48"
51441 ♦☼	17	Med. BiPin	4,7	LED 17T8/48"/DIM/50 SE/DE Ballast Bypass	Sleeve	T8 & T12	Daylight	Frost	5000	83	2200	50000	48"
T8 96 INCH (DesignLights Consortium* qualified product)													
34051 ♦☼	40	Single Pin	4,7	LED 40T8/96"/DIM/40 Ballast Bypass	Bulk	T8 & T12	Cool White	Frost	4000	82	5500	50000	96"
34052 ♦☼	40	Single Pin	4,7	LED 40T8/96"/DIM/50 Ballast Bypass	Bulk	T8 & T12	Daylight	Frost	5000	82	5500	50000	96"

♦ DLC qualified

■ Replace F54T5HO linear fluorescent lamps.

▶ Dimmable when used with a compatible dimming ballast.

☼ Dimmable when used in conjunction with a (0-10V) dimming system and dimming module sold separately (Item# 502606930).

Ballast Bypass lamps are designed to operate on voltages ranging from 120-277V.

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

1 New Item

2 Dimmable

3 Low Voltage (12V)

4 Approved for Damp Location

5 Approved for Wet Location

6 Indoor Application Only

7 Approved for Use in Totally Enclosed Fixtures



U-BENT LINEAR LAMPS

This Linear LED Lamp is UL Classified and NSF Certified.



T8 U-BENT

Item No.	Energy Used (Watts)	Lamp Base	Footnotes	Domestic Code	Package Type	Lamp Type Replacement	Color Designation	Finish	Color Temperature (Kelvin)	CRI	Brightness (Lumens)	Avg. Rated Hours	MOL
T8 U-BENT (DesignLights Consortium® qualified product)													
50300	18	Med. BiPin	4,7	LED 18T8/UB6/DIM/40 Ballast Bypass	Box	T8 & T12 U	Cool White	Frost	4000	82	2200	50000	22.84"

⚙ Dimmable when used in conjunction with a (0-10V) dimming system and dimming module sold separately (Item# 502606930).
Ballast Bypass lamps are designed to operate on voltages ranging from 120-277V.

T8 LED BALLAST BYPASS LAMP DIMMER MODULE



502606930

Item No.	Footnotes	Description	Height	Width	Depth
502606930		T8 LED Ballast Bypass Lamp Dimmer Module	1.20"	12.68"	1.70"

See individual product specification sheets for dimmer and ballast compatibility on www.westinghouselighting.com.

Footnotes

- | | | | |
|------------|------------------------------|-----------------------------|---|
| 1 New Item | 3 Low Voltage (12V) | 5 Approved for Wet Location | 7 Approved for Use in Totally Enclosed Fixtures |
| 2 Dimmable | 4 Approved for Damp Location | 6 Indoor Application Only | |

YouTube Videos



Visit Our YouTube Channel for LED Educational Videos

In just a few minutes, learn more about these LEDs by watching our brief videos, visit <https://www.youtube.com/c/Westinghouselighting>



Long Life LED vs Incandescent Informational Video

Learn more about the benefits of long-lasting LED technology.



Light Bulb Color Temperature Informational Video

Discover how choosing the right color temperature can alter the ambiance of a room.



HID to High Lumen LED Conversion Video

This informative tutorial includes the conversion of a parking lot light from a metal halide HID to an energy-efficient high lumen LED lamp.



TLED General Informational Video

General information about Westinghouse TLED linear direct install and ballast bypass lamps.



TLED Single Ended Retrofit Informational Video

Overview of our single-ended TLED lamps.



TLED Double Ended Retrofit Informational Video

Overview of our double-ended TLED lamps.



4 Ft. T8 LED Direct Install Installation Video

Westinghouse T8 Direct Install LEDs can easily replace traditional fluorescent T8 lamps.



4 Ft. T8 LED Ballast Bypass Installation Video

T8 Ballast Bypass LEDs can replace traditional fluorescent T8 lamps but installation requires knowledge of fluorescent lighting fixtures and electrical systems.



8 Ft. TLED FAQs Video

We answer some of your most frequently asked questions about our 8 Ft. TLEDs.



8 Ft. T8 LED Ballast Bypass Installation Video

General overview of a ballast bypass installation for use with Westinghouse ballast bypass 8 ft T8 LEDs.



Universal TLED Informational Video

Short overview of Linear TLED Universal lamps that operate on both single-ended and double-ended wiring.



Round Slim Recessed LED Downlight Installation Video

Our slim recessed LEDs are even easier to install with the help of this video.



Square Recessed LED Downlight Installation Video

Make installation of our standard LED downlights even easier with the help of this video.



Round Recessed LED Downlight Installation Video

Make installation of our standard LED downlights even easier with the help of this video.

©2022 Google Inc. All rights reserved. YouTube is a trademark of Google Inc.



WESTINGHOUSE LIGHTING

For additional information or to place your order call us at 800-999-2226, or contact your Westinghouse Lighting Sales Representative.

 and Westinghouse are trademarks of Westinghouse Electric Corporation. Used under license by Westinghouse Lighting. All Rights Reserved.