


NEW!

Fire-Rated Slim Recessed Downlights

- Complies with UL 263/ASTM E119 and CAN/ULC 101 for a **2-hour fire rating**.
- Available in **4- or 6-inch sizes**, these all-in-one downlights meet air-tight requirements and feature **steel-walled casing**.
- Choose from **2700K, 3000K, 3500K, 4000K, or 5000K** during installation using the color temperature selector.
- 90 CRI** provides accurate color rendering, ideal for use in multi-dwelling residential, commercial, and hospitality settings.
- Approved for **wet locations**, compatible with most dimmers, and designed for **easy installation** with smooth white baffle.



Representation of typical 2-hour fire-rated construction

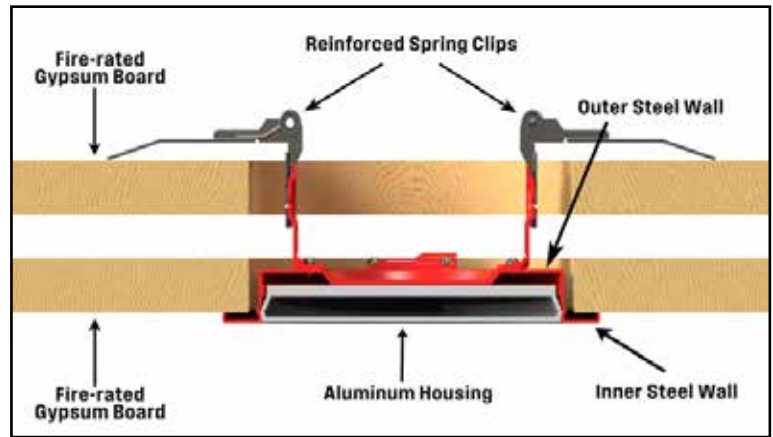

Use a two-hour fire-rated floor/ceiling assembly constructed in accordance with material and construction specifications of UL Design No. UL 505, L511, L536, L538, L541, L556, L577, M500, M510, M521, or M543.



53100
11W Fire-Rated Slim Recessed LED Downlight
Color Temperature Selection
4 in. Dimmable
2700K, 3000K, 3500K, 4000K, 5000K,
120 Volt, Box
Height: 2.32" Diameter: 5.04"



53120
15W Fire-Rated Slim Recessed LED Downlight
Color Temperature Selection
6 in. Dimmable
2700K, 3000K, 3500K, 4000K, 5000K,
120 Volt, Box
Height: 2.32" Diameter: 7.17"

Item No.	Number of Lamps	Energy Used (Watts)	Equiv. Incand. Wattage	Kelvin (Color Temperature)	Lumens†	CRI	Average Rated Hours	Life in Years*	Est. Yearly Energy Cost**
53100	*	11	80	Multi 5	900	90	50000	45.6	\$1.32
53120	*	15	100	Multi 5	1230	90	50000	45.6	\$1.81

* Integrated LED Light Source

†Based on 3hrs./day **Based on 3hrs./day 11¢/kWh

Can be used to comply with the 2022 Title 24, Part 6, high efficiency light source requirements.



WESTINGHOUSE LIGHTING

For additional information or to place your order call us at 800-999-2226, or contact your Westinghouse Lighting Sales Representative.

and Westinghouse are trademarks of Westinghouse Electric Corporation. Used under license by Westinghouse Lighting. All Rights Reserved.