



# SPECIFICATION SHEET

## Slim Recessed Dimmable LED Downlight


Item Number **51880**

### Specifications

Energy Used (Watts).....	10
Incandescent Equivalent Wattage.....	65
Domestic Code.....	10R/4"/LED/DIM/SLIM/SQ/FL/40
Volts.....	120
Brightness (Lumens).....	600
Average Rated Hours.....	50,000
Life (in years)*.....	45.6
Light Appearance (Kelvin).....	4000
Beam Spread.....	120°
Beam Type.....	Flood
CRI.....	90
Efficacy (LPW).....	60
Number of LED Modules.....	50
Dimming Range.....	10% - 100%
Estimated Yearly Energy Cost**.....	\$1.20
Package Type.....	Box

26 inch lead wire between light and external driver allows for flexible driver positioning.

Twist lock connector for easy installation.

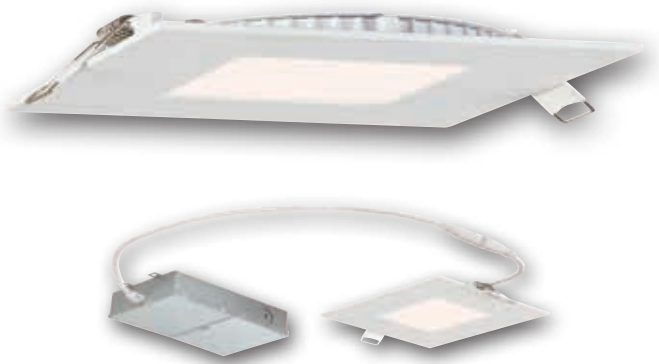

### Physical Characteristics

Color Designation.....	Cool White
Finish.....	White
Housing Material.....	Aluminum
MOL.....	0.98"
MOD.....	4.72"

### Limited Warranty

This luminaire is warranted to be free from defects in material and workmanship for 5 years (based on using 3 hours per day).

### Warning

- Turn power off before inspection, installation, or removal.
- Risk of electric shock - Do not use where exposed to water or weather..
- Do not open – no user serviceable parts inside.
- This device is not intended for use with emergency exit luminaires or emergency exit lights.
- This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.
- This luminaire may not be compatible with all dimmers.

\*Based on 3 hrs./day

\*\* Based on 3 hrs./day 11¢/kWh - Cost depends on rates and use.

**24** Can be used to comply with the 2016 Title 24, Part 6, high efficacy light source requirements.



## Recessed LED Downlight Dimmer Compatibility

Brand	Model
Leviton	CD-C22-06672-12A, CD-R00-RNL06-12
Lutron	CTCL-153P-WH, DVCL-153P, DVCL-153PR-WH, DVCL-253P-WH, LGCL-153PLH, MACL-153M-WH, MACL-153PLH-WH, MRF2-6CL-WH, PD-10NXD-WH, PD-6WCL-WH, S-600P-WH, S-603PG, SCL-153P, TGCL-153P

*Specifications are subject to change without notice, please visit [www.westinghouselighting.com](http://www.westinghouselighting.com) for latest information.*

**Call 1-800-999-2226 or visit [www.westinghouselighting.com](http://www.westinghouselighting.com).**

®. WESTINGHOUSE, and INNOVATION YOU CAN BE SURE OF are trademarks of Westinghouse Electric Corporation.  
Used under license by Westinghouse Lighting. All Rights Reserved.